

A

B

C

D

E

F

A

B

C

D

E

F



LUMINAIRE REQUIREMENTS

1. 4" STRIP LED.
2. FLAT DIFFUSE LENS WITH 48" WIREGAUD.
3. FIXTURE SHALL PROVIDE 5,000 LUMENS.
4. 3500K COLOR TEMPERATURE.
5. 5 - YEAR LIMITED WARRANTY.
6. MADE IN THE USA.

TYPE "G" - 4 FT STRIP WITH WIREGUARD

G



LUMINAIRE REQUIREMENTS

1. 3500K COLOR TEMPRETURE.
2. FIXTURE SHALL PROVIDE 5,000 LUMENS.
3. 8" CYLINDER DOWNLIGHT.
4. CLEAR TRIM COLOR
5. SEMI-SPECULAR FINISH.
6. 5 - YEAR LIMITED WARRANTY.
7. MADE IN THE USA.

TYPE "F" - 8 INCH CYLINDER PEDANT

F



LUMINAIRE REQUIREMENTS

1. 2X4 TROFFER WITH CURVED LENS.
2. FIXTURE SHALL PROVIDE 4800 LUMENS.
3. FIXTURE SHALL BE DIMMABLE.
4. 5 - YEAR LIMITED WARRANTY.
5. MADE IN THE USA.

TYPE "D" - 2X4 RECESSED TROFFER

D



LUMINAIRE REQUIREMENTS

1. 36" DIAMETER DRUM PENDANT.
2. COLOR BY ARCHITECT.
3. FIXTURE SHALL PROVIDE 5877 LUMENS.
4. 3500K COLOR TEMPERATURE.
5. 5 - YEAR LIMITED WARRANTY.
6. MADE IN THE USA.

TYPE "C" - 36 INCH DRUM PENDANT

C



LUMINAIRE REQUIREMENTS

1. 26" VANITY FIXTURE.
2. BRUSHED NICKEL FINISH.
3. 3000K COLOR TEMPERATURE.
4. (3) LAMP, 10WATT PER LAMP.
5. 5 - YEAR LIMITED WARRANTY.
6. MADE IN THE USA.

TYPE "B" - 24 INCH VANITY

B



LUMINAIRE REQUIREMENTS

1. 4" DOWNLIGHT.
2. FIXTURE SHALL PROVIDE 1575 LUMENS.
3. 2700K COLOR TEMPERATURE.
4. 5 - YEAR LIMITED WARRANTY.
5. MADE IN THE USA.

TYPE "A" - RECESSED DOWNLIGHT

A



LUMINAIRE REQUIREMENTS

1. DARK SKY FRIENDLY
2. FIXTURE SHALL PROVIDE 3100 LUMENS.
3. TYPE III DISTRIBUTION.
4. 120-277-VOLT OPTION.
5. 4000K COLOR TEMPERATURE.
6. PHOTOCCELL.
7. 5 - YEAR LIMITED WARRANTY.
8. MADE IN THE USA.

TYPE "R" - POST TOP SITE LIGHTING

R



LUMINAIRE REQUIREMENTS

1. 52" HAIK OUTDOOR CEILING FAN.
2. COCOA WOODGRAIN.
3. UNIVERSAL MOUNTING.
4. OUTDOOR LIGHT KIT.
5. 5 - YEAR LIMITED WARRANTY.
6. MADE IN THE USA.

TYPE "P" - CEILING FAN

P



LUMINAIRE REQUIREMENTS

1. FULLY DIMMABLE.
2. FIXTURE SHALL PROVIDE 3278 LUMENS.
3. 2700K COLOR TEMPERATURE.
4. 5 - YEAR LIMITED WARRANTY.
5. MADE IN THE USA.

TYPE "N" - 19 LIGHT CHANDELIER

N




LUMINAIRE REQUIREMENTS

1. 4" STRIP LED.
2. FLAT DIFFUSE LENS WITH 48" WIREGAUD.
3. FIXTURE SHALL PROVIDE 5,000 LUMENS.
4. 3500K COLOR TEMPERATURE.
5. 5 - YEAR LIMITED WARRANTY.
6. MADE IN THE USA.
7. DUAL TECHNOLOGY OCCUPANCY SENSOR.

TYPE "M" - STAIRS

M

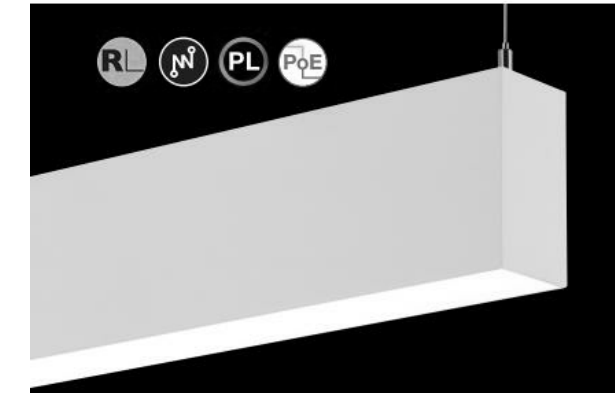


LUMINAIRE REQUIREMENTS

1. LINEAR SUSPENDED FIXTURE.
2. FIXTURE SHALL PROVIDE 750 LUMEN/FT.
3. 3500K COLOR TEMPERATURE.
4. 5 - YEAR LIMITED WARRANTY.
5. MADE IN THE USA.

TYPE "K" - 4 FT LINEAR SUSPENDED

K

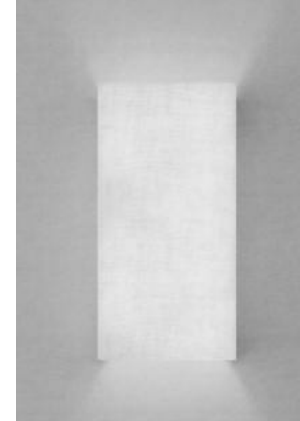


LUMINAIRE REQUIREMENTS

1. RECTANGULAR ADA SCONCE.
2. WASHABLE ACRYLIC RESIN.
3. 3500K COLOR TEMPERATURE.
4. FIXTURE SHALL BE DIMMABLE.
5. 5 - YEAR LIMITED WARRANTY.
6. MADE IN THE USA.

TYPE "H" - RECTANGULAR WALL SCONCE

H

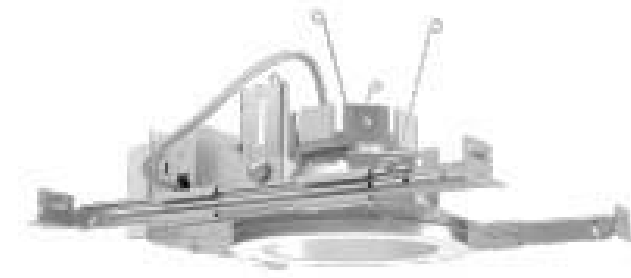

LUMINAIRE REQUIREMENTS

1. 6" ROUND DOWNLIGHT
2. FIXTURE SHALL PROVIDE 5000 LUMENS.
3. SEMI-SPECULAR FINISH.
4. MULTI-VOLT OPTION.
5. 3500K COLOR TEMPERATURE.
6. 5 - YEAR LIMITED WARRANTY.
7. MADE IN THE USA.

TYPE "S" - LED RECESSED MOUNTED

S



LUMINAIRE REQUIREMENTS

1. SINGLE RAIL.
2. RAIL LENGTH OF 48"
3. WALL ARM MOUNTED
4. ARM LENGTH OF 6"
5. 2700K COLOR TEMPERATURE.
6. 5 - YEAR LIMITED WARRANTY.
7. MADE IN THE USA.

TYPE "Q" - LED WING RAIL CEILING WALL ARM

Q



LUMINAIRE REQUIREMENTS

1. EXIT SIGN.
2. MULTI-VOLT.
3. WHITE THERMOPLASTIC HOUSING.
4. RED LETTER, AC ONLY.
5. WEATHERPROOF.
6. 5 - YEAR LIMITED WARRANTY.
7. MADE IN THE USA.

TYPE "X" - LED EXIT LIGHT WALL MOUNTED

X



LUMINAIRE REQUIREMENTS

1. 4000K COLOR TEMPERATURE.
2. FIXTURE SHALL HAVE INTEGRAL PHOTOCCELL.
3. 5 - YEAR LIMITED WARRANTY.
4. MADE IN THE USA.
5. WEATHERPROOF.

TYPE "T" - WALL PACK

T

LIGHTING FIXTURE SCHEDULE									
TYPE	MANUFACTURER	CATALOG NUMBER	DESCRIPTION	Fix. Qty	Lamp Type	VOLTS	MOUNTING	REMARKS	INPUT WATTS
A	USAI	P4RDF 15L2 27KS M WH NC UNV D22	4.5" DOWNLIGHT, 1575 LUMENS, 50,000 HOUR L70 RATED LIFE, 5 YEAR WARRANTY, DIMMABLE	323	LED	120	RECESSED	RESIDENT, 0-10V DIMMING	15
B	BROWNLEE	5853 BN G30 BAC	26" VANITY, (3) 10W GU24LED LAMPS	31	LED	120	SURFACE	VANITY	30
C	BROWNLEE	2612 36 CC3 NT C49 XXX 35K BAC	36" DIAMETER DRUM PENDANT, COLOR BY ARCHITECT, 5877 LUMENS, 50,000 HOUR L70 RATED LIFE, 5 YEAR WARRANTY	2	LED	120	PENDANT	LIVING ROOM	49
D	LITHONIA	2BLT4 48L ADP 120 GZ10 LP835 USPOM	2X4 TROFFER, CURVED LENS, 4800 LUMENS, 60,000 L80 RATED LIFE, 5 YEAR WARRANTY, DIMMABLE	49	LED	120	RECESSED	GENERAL	44
F	LITHONIA	LDN8CYL 35/50 L0AR LD 120 GZ10 PM DWHG	8" CYLINDER, 8000 LUMENS, 60,000 L70 RATED LIFE, 5 YEAR WARRANTY	35	LED	120	PENDANT	CORRIDOR	93
G	LITHONIA	CLX L48 5000LM SEF FDL 120 GZ10 35K 80CRI WH USPOM HC36 WGLCX48	4" STRIP, FLAT DIFFUSE LENS WITH 48" WIREGAUD, 5,000 LUMENS, 100,000 HOUR L70 RATED LIFE, 5 YEAR WARRANTY	37	LED	120	SURFACE	UTILITY	36
H	AUBERGE	AU RE R15W 3S 9 RE7W14H XX XX	RECTANGULAR ADA WALL SCONCE, WASHABLE ACRYLIC RESIN, 100,000 HOUR L70 RATED LIFE, 10 YEAR WARRANTY, DIMMABLE	48	LED	120	SURFACE	GENERAL	15
K	FOCAL POINT	FSM2LS FL 720LF 35K 1C UNV LD1 C24 WH	LINEAR SUSPENDED, DIRECT, 750 LUMENS/FT, 61,000 HOUR L70 RATED LIFE, 5 YEAR WARRANTY, DIMMABLE	20	LED	120	SUSPENDED	DINING	28
M	LITHONIA	CLX L48 5000LM SEF FDL 120 GZ10 35K 80CRI WH USPOM HC36 WGLCX48 MSDPDT7	4" STRIP, FLAT DIFFUSE LENS WITH 48" WIREGAUD, 5,000 LUMENS, 100,000 HOUR L70 RATED LIFE, 5 YEAR WARRANTY, DUAL TECHNOLOGY OCCUPANCY SENSOR	37	LED	120	SURFACE	STAIRS	36
N	TECH LIGHTING	GAMBIT 19-LIGHT CHANDELIER	FULLY DIMMABLE, LED 3278 LUMENS, 90 CRI, 2700K	1	LED	120	PENDANT	SALON	38
P	BIG ASS FANS	FR127A 50 F1 0-3H03 02 258 654PD10	52" HAIKU OUTDOOR CEILING FAN, COCOA WOODGRAIN, UNIVERSAL MOUNTING WITH OUTDOOR LIGHT KIT	4	LED	120	CEILING	OUTDOOR	22
Q	VODE LIGHTING	LED WING RAIL	ART WALL LIGHTING, WALL ARM MOUNTED, 2700K COLOR TEMPERATURE	6	LED	120	WALL	ART LIGHTING	6.14
R	ANP LIGHTING	LA213 1 P117LD4 D 23 W 40K PC	DARK SKY FRIENDLY, TYPE 3 DISTRIBUTION, 4000K IN COLOR TEMPERATURE, PHOTOCCELL, WHITE	8	LED	120	POLE	SITE LIGHTING	117
	ANP LIGHTING	CB1206 4S15.188 44	15FT, 4" DIAMETER WHITE POLE, SEE SHEET C0503 DETAILS "B" AND SHEET S020 DETAILS "W" FOR ADDITIONAL INFORMATION	8				POLE	
S	LITHONIA	LDN6 35/50 L0GAR LSS MVOLT GZ10 USPOM	6" DOWNLIGHT, 3500K COLOR TEMPERATURE, 5000 LUMENS, SEMI-SPECULAR, 0-10 DRIVER DIMS TO 10% 5 YEAR WARRANTY	14	LED	120	RECESSED	EXTERIOR	10
T	BROWNLEE	CEILING WALL ARM	WALL PACK, 4000K COLOR TEMPERATURE, WITH PHOTOCCELL	13	LED	120	WALL	EXTERIOR	45
U	KIM LIGHTING	ELL271	FLOOD LIGHT BY LANDSCAPE	5	LED	120	GRADE	EXTERIOR	7
V	KIM LIGHTING	B30 LED	BOLLARD BY LANDSCAPE	17	LED	120	GRADE	EXTERIOR	25
W	KIM LIGHTING	EL807	WALL LIGHT BY LANDSCAPE	16	LED	120	GRADE	EXTERIOR	11
X	LITHONIA	LQM S W 3 R 120/277 AC	EXIT SIGN, WHITE THERMOPLASTIC HOUSING, RED LETTER, AC ONLY	19	LED	120	WALL	GENERAL	4

LIGHTING SCHEDULE NOTES:
1. ALL LAMPS SHALL BE 80+ CRI AND 3500K UNLESS NOTED OTHERWISE

LIGHTING CONTROL DEVICES SCHEDULE						
TAG	MANUFACTURER	CATALOG NUMBER	DESCRIPTION	QTY	CONTROL WIRING	MOUNTING
1X5	ACUTY	WSX PDT	WALL SWITCH OCCUPANCY/VACANCY SENSOR	AS REQ	120V LINE VOLTAGE	ELECTRICAL BOX
1X52	ACUTY	WSX PDT 2P	DUAL RELAY WALL SWITCH OCCUPANCY SENSOR	AS REQ	120V LINE VOLTAGE	ELECTRICAL BOX
1C5	ACUTY	hCM PDT 9	CEILING MOUNT, DUAL TECH SENSOR	AS REQ	CAT5	CEILING
1C5p	ACUTY	hCM 6	CEILING MOUNT PIR HIGH MOUNT	AS REQ	CAT5	ELECTRICAL BOX
1X1V	ACUTY	hPDOM	hLIGHT PUSH-BUTTON SWITCH, 1 CHANNEL	AS REQ	CAT5	ELECTRICAL BOX
1X5W	ACUTY	hPDOM 4SB	hLIGHT PUSH-BUTTON SCENE SWITCH, 4 CHANNEL	AS REQ	CAT5	ELECTRICAL BOX
1X0	ACUTY	hPDOM DX	hLIGHT DIMMER SWITCH, 1 CHANNEL	AS REQ	CAT5	ELECTRICAL BOX

LIGHTING CONTROLS SCHEDULE NOTES:
1. The equipment used for the basis of design is Acuity Brands Controls.
2. Other equipment may be submitted for approval up to 10 working days prior to bid date, to allow for proper evaluation. Submissions within 10 working days prior to bid date will not be evaluated. Equipment is approved through addendum only.

LIGHTING CONTROL DEVICES SCHEDULE						
TAG	MANUFACTURER	CATALOG NUMBER	DESCRIPTION	QTY	CONTROL WIRING	MOUNTING
1RC1	ACUTY	hPP16 D	ROOM CONTROLLER, 1-CIRCUIT, 0-10V DIMMING, 16A MAX	AS REQ	120V LINE VOLTAGE	ELECTRICAL BOX
1C5	ACUTY	hCM ADCX	SINGLE ZONE, PHOTO SENSOR, CEILING MOUNT	AS REQ	CAT5	ELECTRICAL BOX
1C5B	ACUTY	ASP-INTENCH16 NLT-16SPRANGLT-16C-PC ARPA-PC	hLIGHT LIGHTING CONTROL PANEL, 16-RELAYS, 0-10V DIMMING, FLUSH MOUNTED, EXTERIOR PHOTOCCELL ACCESSORY	1	120V LINE VOLTAGE	SURFACE
1ER1	ACUTY	hPP16 D ER	EMERGENCY LIGHTING CONTROLLER, 1-CIRCUIT, 0-10V DIMMING, 16A MAX	AS REQ	CAT5	ELECTRICAL BOX

LIGHTING CONTROLS SCHEDULE NOTES:
1. The equipment used for the basis of design is Acuity Brands Controls.
2. Other equipment may be submitted for approval up to 10 working days prior to bid date, to allow for proper evaluation. Submissions within 10 working days prior to bid date will not be evaluated. Equipment is approved through addendum only.

DEDUCT ALTERNATIVE NOTES

(DEDUCTIVE ALTERNATIVES ARE CASCADING AND MUST BE EXERCISED IN THE ORDER PRESENTED) FOR A DETAILED DESCRIPTION OF EACH DEDUCTIVE ALTERNATE REFER TO COVER SHEET G1000.
DEDUCT ALTERNATIVE #6 : ELIMINATE LANDSCAPE
DEDUCT ALTERNATIVE #9 : ELIMINATE LARGE PORCH
DEDUCT ALTERNATIVE #10 : ELIMINATE SMALL PORCH-A
DEDUCT ALTERNATIVE #11 : ELIMINATE SMALL PORCH-B

Revisions:	Date:

CONSULTANT

NORRIS DESIGN
Thermal, Mechanical, and Lighting
416 North Toole Avenue
Tucson, AZ 85701
(520) 622-9505
Josh Orth, P.E.

HINMAN

Protective Design Specialist
240 West 35th St, Suite 1004
New York, NY 10001
(212) 967-4880
Corrine Tan, SE

C.S. Davidson, Inc.

Structural
515 West James Street, Suite 102
Lancaster, PA 17603
(717) 481-2991
Jason Vannoy, SE, PE

MES GROUP

MEP
550 North Rex Street, Suite 203
Tampa, FL 33609
(813) 289-4700
Nicholas Stephenson, PE

ARCHITECT/ENGINEER OF RECORD

A/E:
TRIPLE C - The A/E Group
201 E. Jefferson Street, Suite 200
Syracuse, NY 13202
(315) 484-5958
Mat Perkins



STAMP



Office of
Construction
and Facilities
Management



U.S. Department
of Veterans Affairs

Drawing Title
ELECTRICAL DETAILS

Approved:

Phase
ISSUED FOR
CONSTRUCTION

FULLY SPRINKLERED

Project Title
NEW COMMUNITY LIVING
CENTER

Location
2094 Albany Post Road, Montrose, NY 10548

Issue Date
05/09/2022

Checked
DK

Drawn
SC

Project Number
620-334

Building Number
CLC

Drawing Number

E-502