


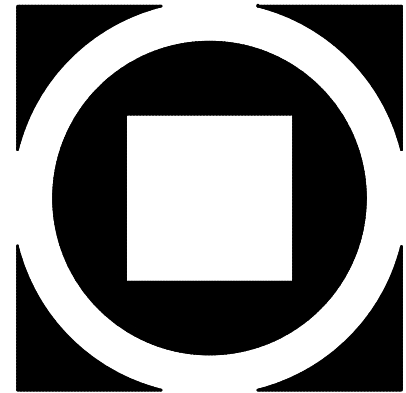

Sheet Name:	WALL PARTITIONS AND WINDOW SCHEDULE	
	Progress Prints:	Revisions:

WINDOW ELEVATIONS - EXTERIOR

REFER TO FLOOR PLANS AND BUILDING ELEVATIONS FOR WINDOW LOCATIONS AND QUANTITIES.

- (ST) STOREFRONT
- (CU) CURTAINWALL
- (T) TEMPERED GLASS AS PER DETAILS AND SPECS
- (H) HEAT STRENGTHENED GLASS
- (1) BREAK METAL, AS PER DETAILS. COLOR TO MATCH WINDOW FRAMES

WINDOW (INCL. CURTAINWALL) NOTES:

- ALL GLASS IN WINDOWS BELOW 30" A.F.F. TO BE TEMPERED.
- WINDOW DIMENSIONS ARE ROUGH OPENING SIZES. CONTRACTOR TO COORDINATE DIMENSIONS WITH ACTUAL FIELD CONDITIONS PRIOR TO FABRICATION.
- SHIM AND INSULATE WINDOWS AS REQ'D; SHIMS AND/OR INSULATION MAY NOT BE SHOWN ON DRAWINGS.
- PROVIDE FLASHING AT HEADS AND SILLS OF ALL EXTERIOR WINDOWS.
- SET SILL FLASHING IN SEALANT. PROVIDE BACKER ROD & SEALANT ON ALL SIDES OF EXTERIOR WINDOWS (PROVIDE WEEPS AT SILL).
- PROVIDE JAMB & MULLION STEEL REINFORCEMENT FOR WINDOWS OVER 8 FEET HIGH AND WHERE INDICATED. ATTACH STEEL REINFORCEMENT TO STRUCTURE (AT TOP & BOTTOM) AS REQUIRED.
- PROVIDE STL CHANNEL STIFFENERS IN WINDOW FRAMES AT ALL DOOR JAMBS.
- REFER TO PLANS AND ELEVATIONS FOR QUANTITIES
- METAL TRIM AROUND WINDOWS SHALL BE CUSTOM COLOR TO MATCH WINDOW EXTERIOR COLOR.
- THE SIZES OF VINYL CLAD WOOD WINDOWS SHOWN IN MASONRY WALLS MAY REQUIRE ADDITIONAL CASING. IF CASING IS REQUIRED FOR THE WIDTH, EQUAL WIDTH CASINGS SHOULD BE PROVIDED ALONG THE JAMBS. IF CASING IS REQUIRED FOR THE HEIGHT, CASING SHOULD BE PROVIDED AT THE HEAD. ALL CASING SHOULD BE PROVIDED BY THE VINYL CLAD WOOD WINDOW MANUFACTURER IN ORDER FOR THE CASING COLOR TO MATCH THE WINDOW COLOR.
- PROVIDE SUPPLEMENTAL DEFLECTION TRACK AT ALL WINDOW HEAD FRAMES AND SILL RECEPTORS AT ALL WINDOW SILLS.
- CURTAINWALL SYSTEM FRAME DEPTH TO BE MINIMUM 7 1/4". THICKNESS OF MATERIAL, STIFFENING, AND DEPTH OF FRAMES TO BE DETERMINED & PROVIDED BY THE CURTAINWALL MANUFACTURER & SHALL EXCEED MINIMUM CODE REQUIREMENTS.
- PROVIDE 1x4 WOOD TRIM AROUND WINDOW JAMBS, 1x6 WOOD TRIM AT HEAD, AND 5/4x WOOD SILL WITH 1x4 APRON.

