


THESE DRAWINGS AND DESIGNS ARE THE PROPERTY OF STINARD ARCHITECTURE, INC. AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF STINARD ARCHITECTURE, INC. THESE DRAWINGS ARE TO BE USED IN CONJUNCTION WITH THE ISSUED PERMIT AND ANY CHANGES TO THE ORIGINAL DESIGN SHALL BE MADE IN WRITING AND SIGNED BY THE ARCHITECT. THE ARCHITECT'S OFFICE SHALL BE RESPONSIBLE FOR ANY DISCREPANCIES BEFORE PROCEEDING WITH CONSTRUCTION. DO NOT SCALE DRAWINGS.

Life Storage #230  
Self Storage Phase II  
1639 Route 22  
Brewster, NY 10509

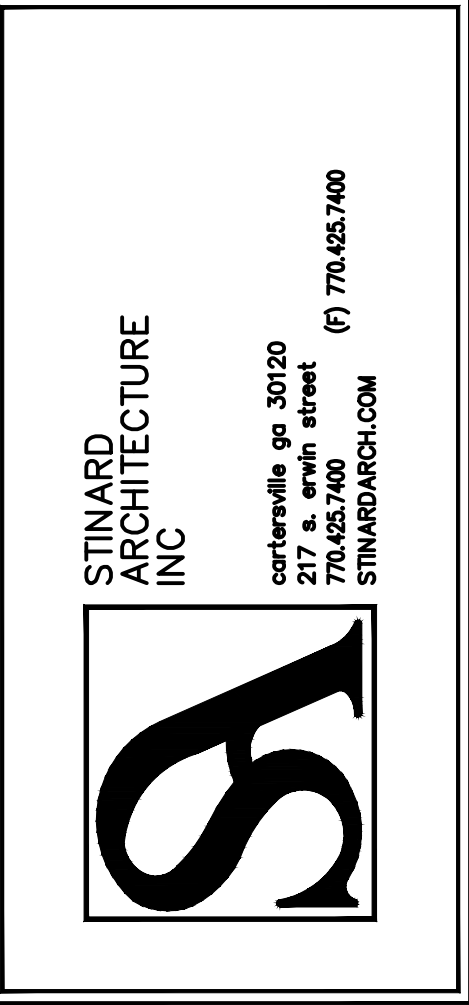

ISSUE: FOR CONSTRUCTION	
REVISIONS:	

PROJECT NUMBER	201941
DATE	6-5-20

SHEET NUMBER  
**M1.1**

- GENERAL NOTES**
- EACH SUPPLY DIFFUSER/REGISTER RUNOUT SHALL BE PROVIDED WITH A VOLUME DAMPER. REFER TO THE DIFFUSER TAKE-OFF DETAIL FOR ADDITIONAL INFORMATION.
  - DRAWINGS ARE DIAGRAMMATIC ONLY; FINAL ROUTING OF DUCTWORK AND EQUIPMENT LOCATIONS SHALL BE DETERMINED IN THE FIELD. ADDITIONAL OFFSETS, ELBOWS, ETC. SHALL BE PROVIDED AND INSTALLED WITHOUT ADDITIONAL COST TO THE OWNER.
  - ALL DUCTWORK SHALL BE INSTALLED AS HIGH AS POSSIBLE (MINIMUM ELEVATION, 8'-4" ABOVE FINISHED FLOOR).
  - MAINTAIN A MINIMUM CLEARANCE OF 1'-0" BETWEEN FLUE DISCHARGE AND MECHANICAL AIR INTAKES.
  - ALL EXHAUST TERMINATIONS TO BE LOCATED A MINIMUM OF 1'-0" FROM MECHANICAL AIR INTAKES.

- KEYNOTES**
- REFER TO CONDENSATE RISER DIAGRAM ON SHEET M0.2.
  - CONTRACTOR TO PROVIDE OWNER AN ADD ALTERNATE TO INCLUDE MINI SPLIT (MPCU-3) AND HEAT PUMP (MHP-3), ALONG WITH CONDENSATE DRAIN LINE, REFRIGERANT LINE SETS, AND ELECTRICAL CONNECTION TO SERVE FIRE PUMP ROOM. THIS SHALL BE PROVIDED AS A SEPARATE LINE ITEM TO THE BASE BID. REFER TO ADD ALTERNATE SCHEDULE.

