SECTION **DETAILS**


HHS A351

CONSTRUCTION DOCUMENTS


COPYRIGHT © ALL RIGHTS RESERVED

- EXISTING WALL BEHIND — EXISTING FRAMING - NEW 2-TIER - NEW ABUSE RESISTANT LOCKER SYSTEM BY LOCKER VENDOR GWB AT SIDES OF LOCKERS WHERE PREVIOUSLY REMOVED. PAINT TO MATCH CORRIDOR WALLS.


5CNEW LOCKER - ENDS (TYP.)
A351 11/2" = 1'-0"

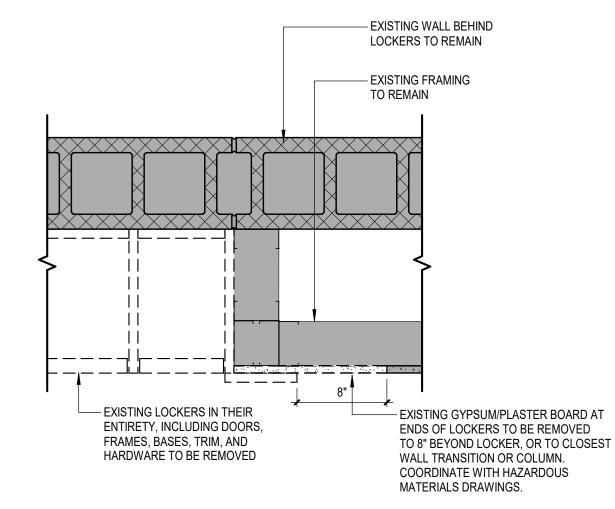


4 CLOCKER DEMOLITION - ENDS (TYP.)
A351 11/2" = 1'-0"

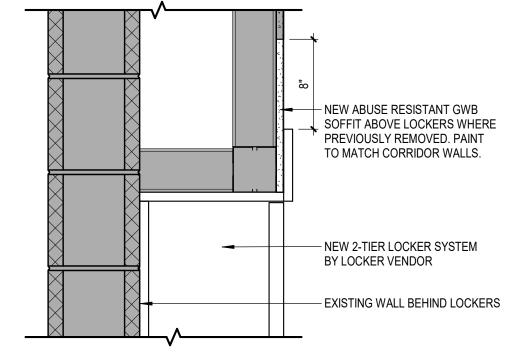

5BNEW LOCKER - SOFFIT A351 11/2" = 1'-0"

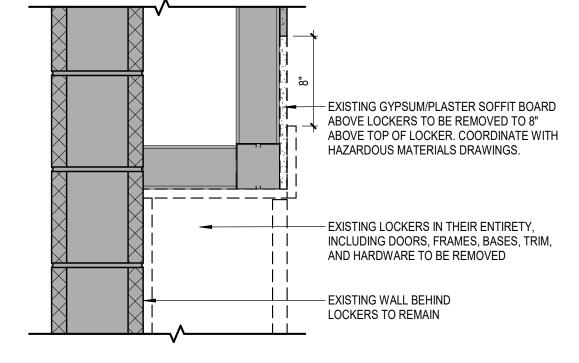

4BLOCKER DEMOLITION - SOFFIT
A351 11/2" = 1'-0"

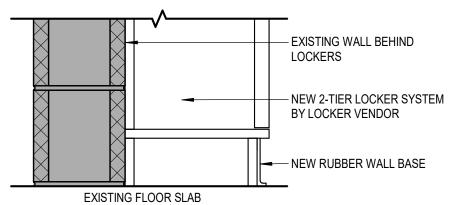

— 2-TIER, 12" DEEP FULLY WELDED


- MINIMUM 5% OF LOCKERS SHALL BE ADA ACCESSIBLE


- RUBBER WALL BASE

OVER LOCKER BASE


LOCKER

5ANEW LOCKER - BASE A351 11/2" = 1'-0"

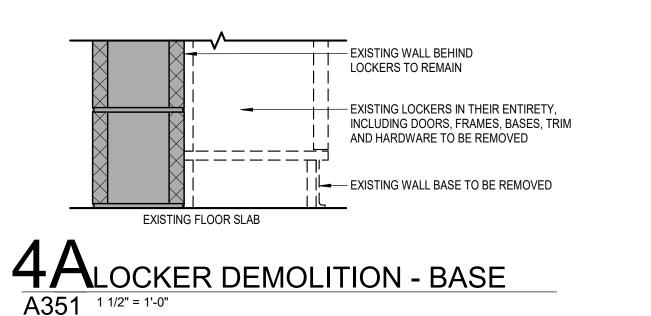

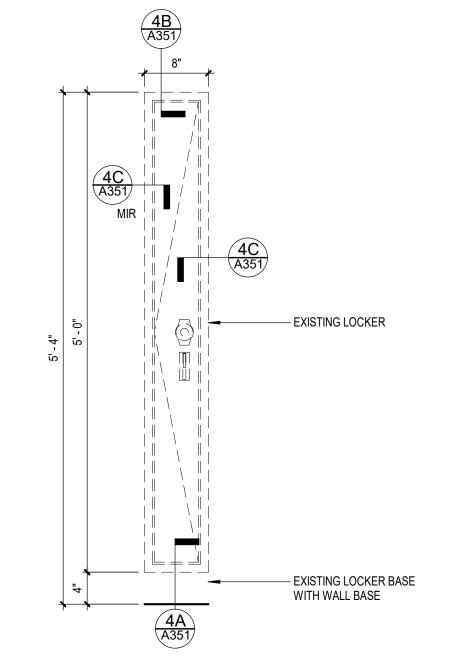

4 EXISTING LOCKER DEMOLITION

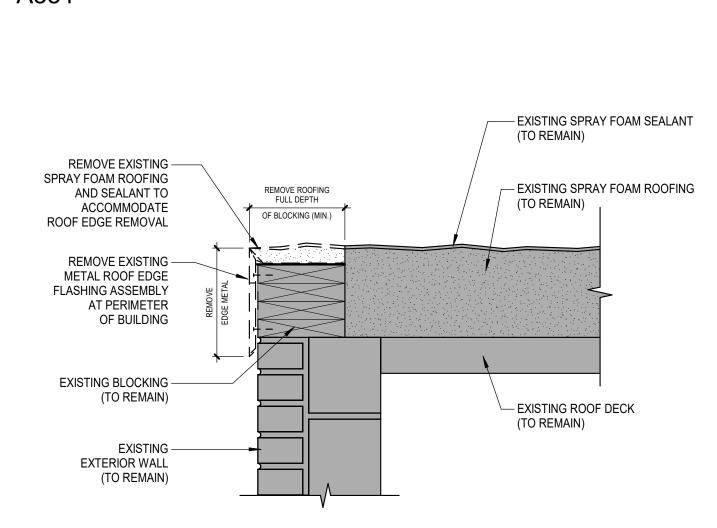

— EXISTING SPRAY FOAM SEALANT

- EXISTING SPRAY FOAM ROOFING

(TO REMAIN)


(TO REMAIN)

- EXISTING ROOF DECK

(TO REMAIN)

ROOF EDGE FLASHING DEMOLITION
A351 1 1/2" = 1'-0"

NEW ROOF EDGE FLASHING

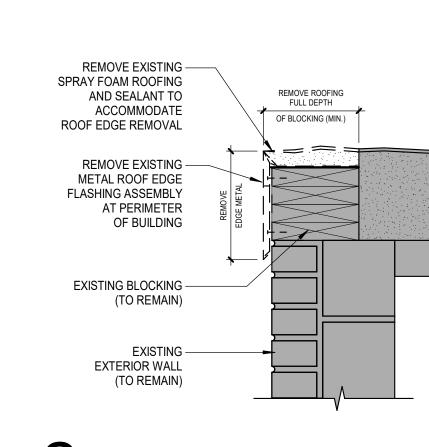

PROVIDE NEW SPRAY —

FOAM ROOFING AND

SEALANT AS REQUIRED TO COVER EXPOSED BLOCKING

WITH FASCIA DEPTH AS

REQUIRED TO COVER EXPOSED BLOCKING


EXISTING BLOCKING -

(TO REMAIN)

EXISTING EXTERIOR WALL (TO REMAIN)

PROVIDE NEW CONTINUOUS SEALANT BELOW FASCIA AT FACE OF BUILDING —

PROVIDE NEW METAL ROOF EDGE ASSEMBLY

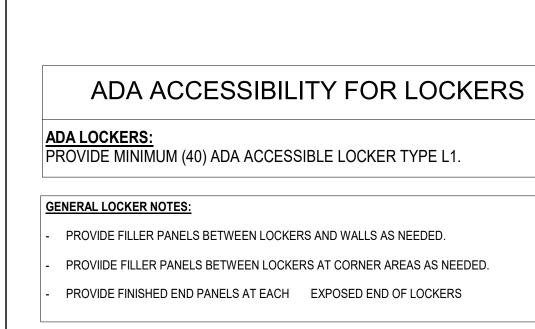

TYP. ACOUSTICAL WALL PANELS

A351 1/2" = 1'-0"

REMOVE WALL MOUNTED ACOUSTICAL WALL PANELS IN THEIR ENTIRETY. COORDINATE WITH HAZARDOUS MATERIALS DRAWINGS. PATCH AND

PAINT WALLS AFTER REMOVAL AS REQUIRED.
REFER TO PLANS FOR LOCATIONS.