


 $6\frac{\text{POLE LIGHTING STANDARD FOUNDATION DETAIL (30")}}{NTS}$




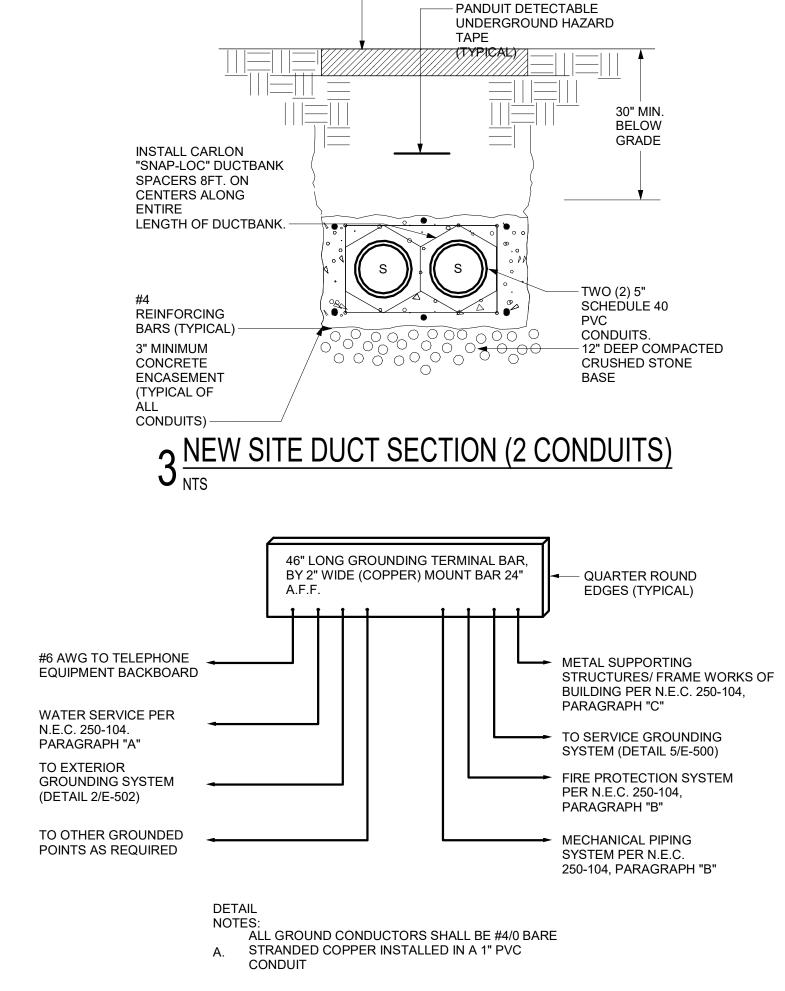

INDICATING CONDUIT NO. OR CIRCUIT IDENTIFICATION. ATTACH WITH NYLON CABLE TIE. **7** TYPICAL CONDUIT STUB-UP DETAIL **L**_{NTS}

- RESTORE EXISTING GRADE. (SEE SPECS.)

- SWITCHGEAR, PROVIDE PVC ELBOWS IN LIEU OF RIGID SHOWN. B. AT EACH CONDUIT STUB-UP, AFFIX ENGRAVED PLASTIC NAMEPLATE
- DETAIL NOTES: A. WHERE CONDUIT STUBS UP UNDER FLOOR MOUNTED EQUIPMENT SUCH AS

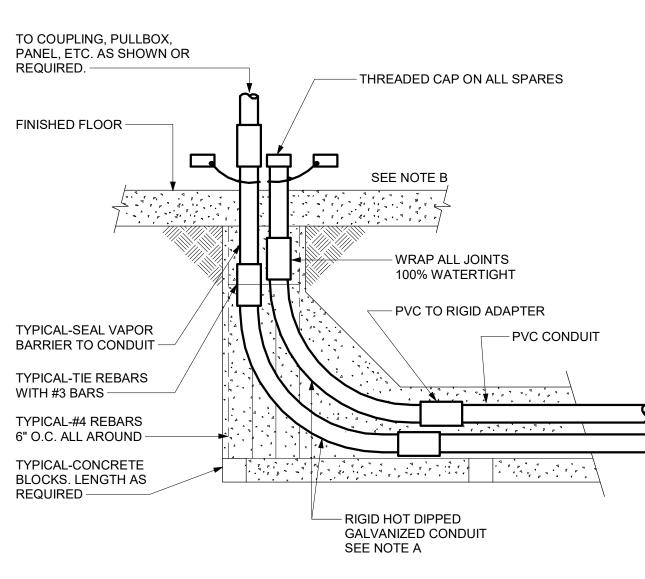

- ▲ TYPICAL DIRECT BURIED CONDUIT DETAIL NTS
- D. WHERE ADDITIONAL CONDUITS ARE REQUIRED, INCREASE TRENCH WIDTH AND INSTALL CONDUITS WITH 3" MINIMUM SPACING.
- C. MINIMUM TOP SOIL 6".
- B. REPAIR ALL SETTLEMENT.
- A. READ THE SPECIFICATIONS.
- DETAIL NOTES:

