




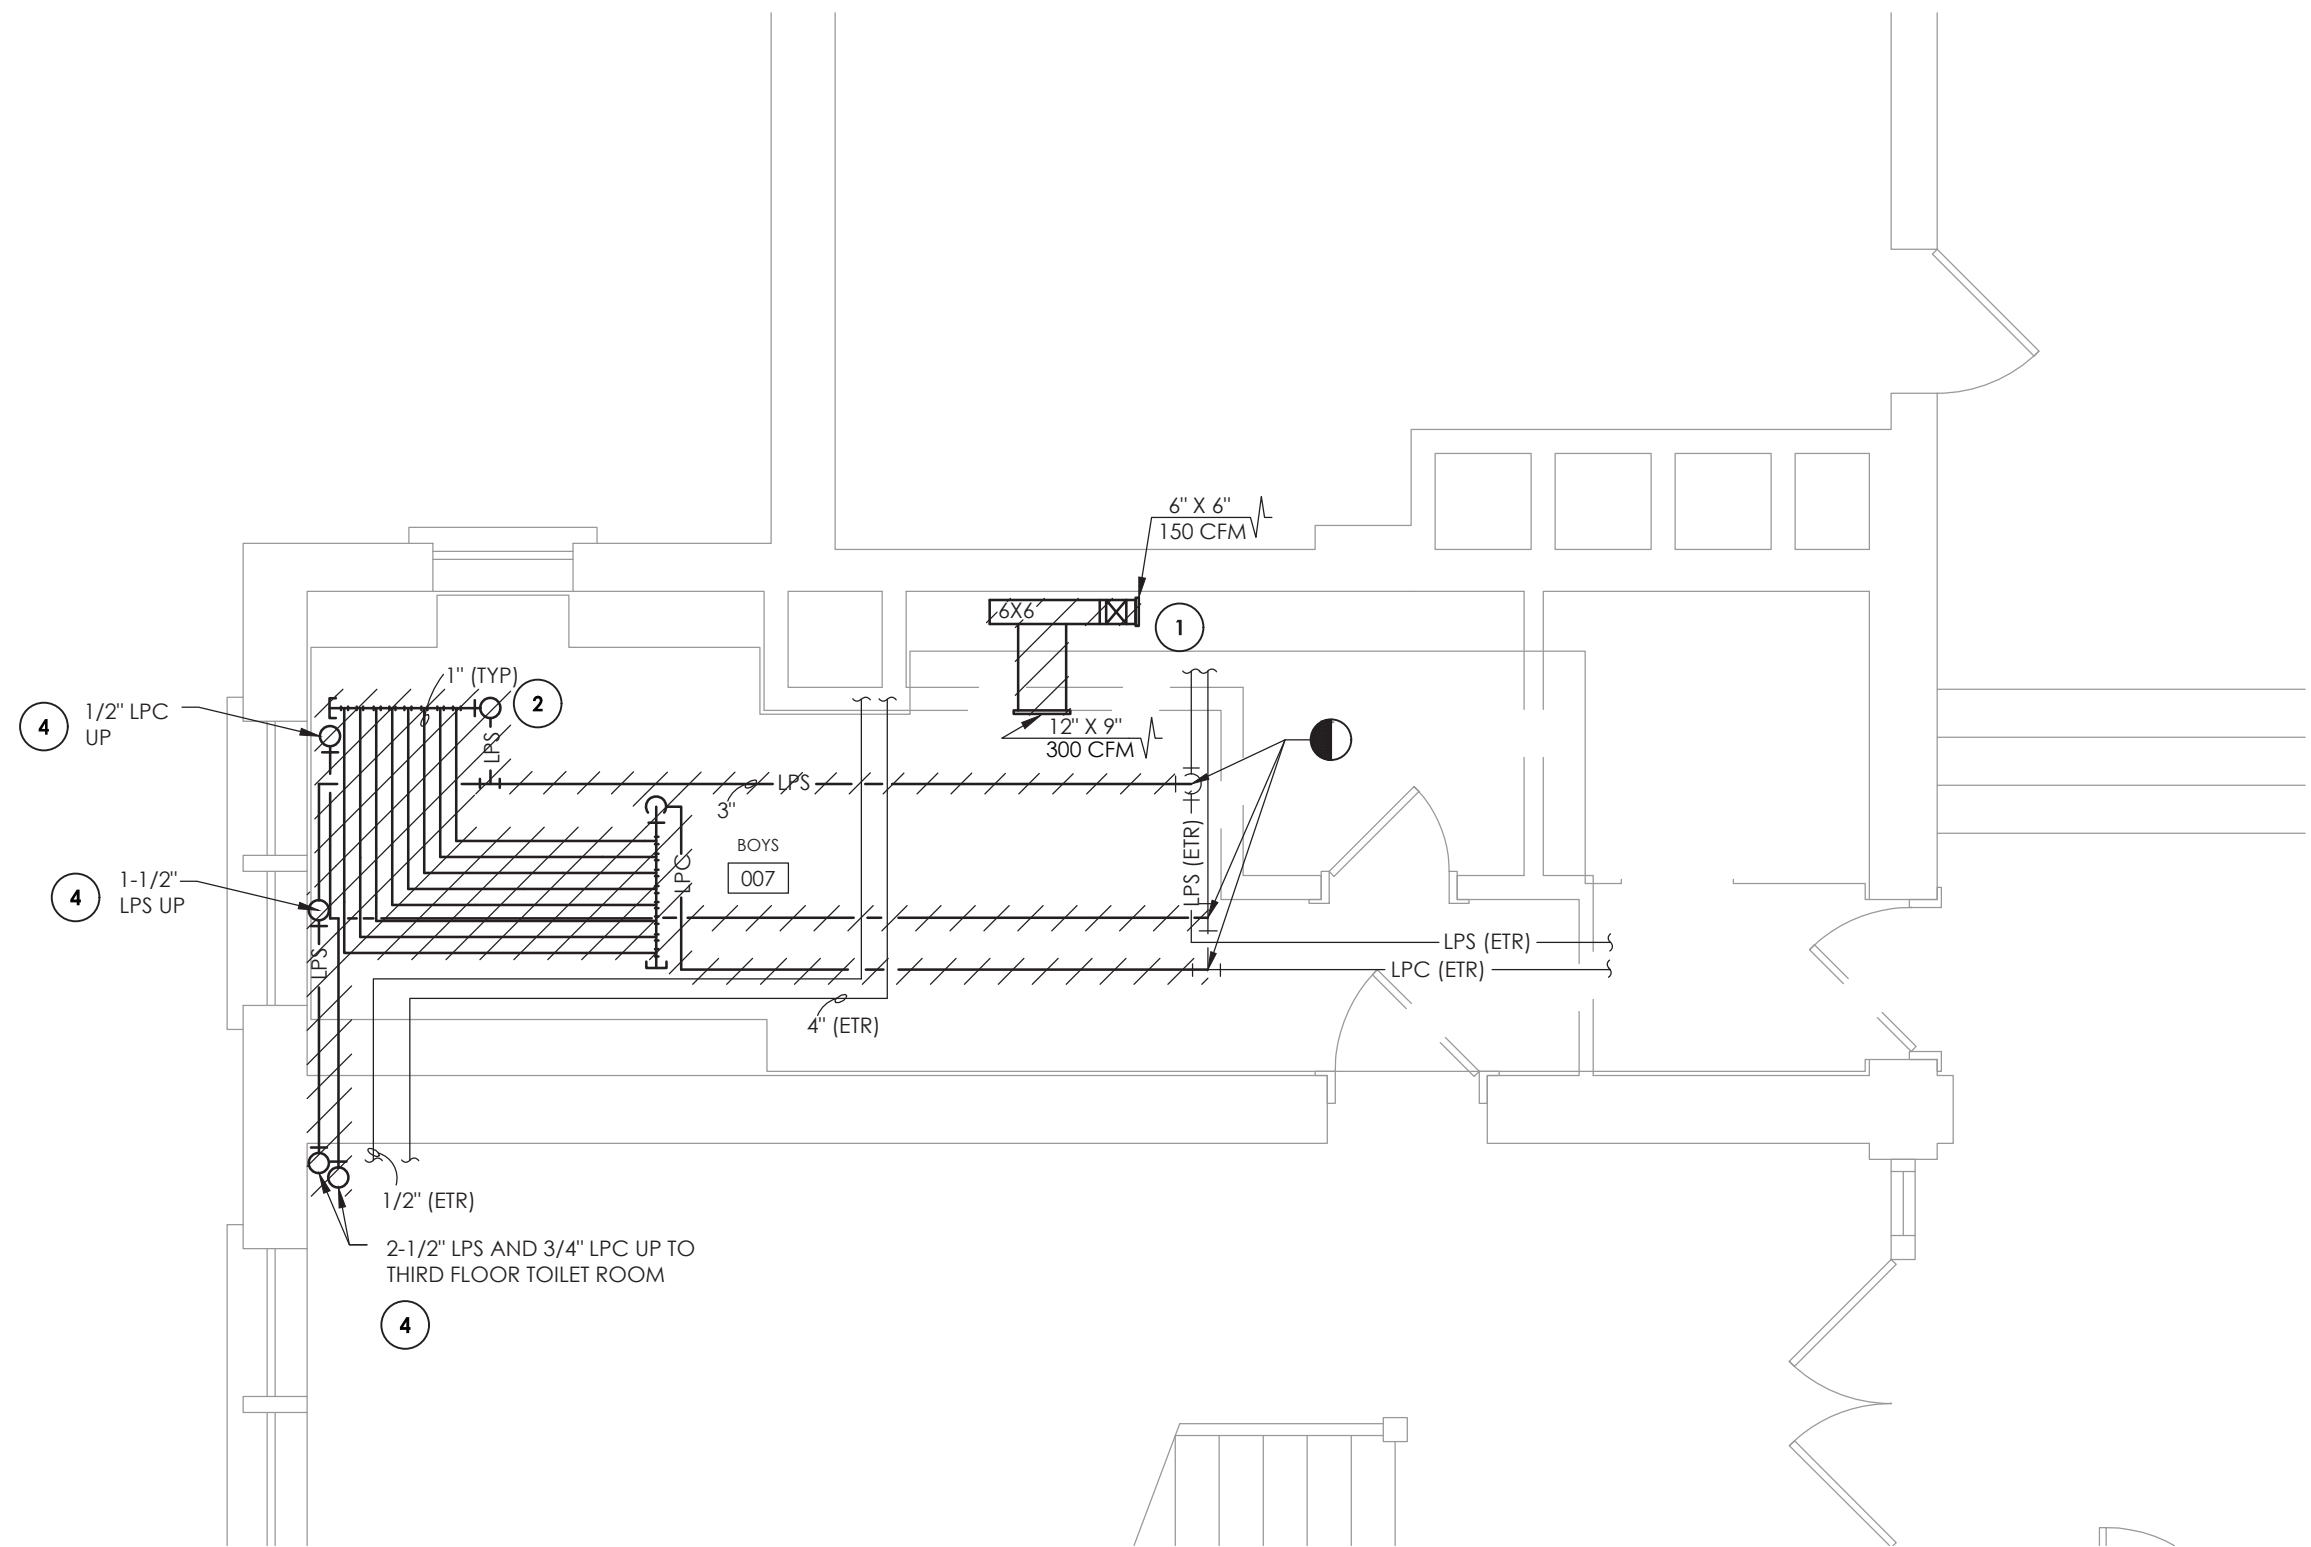

1
H100A
TOILET ROOM 007 DEMOLITION
SCALE: 1/4" = 1'-0"

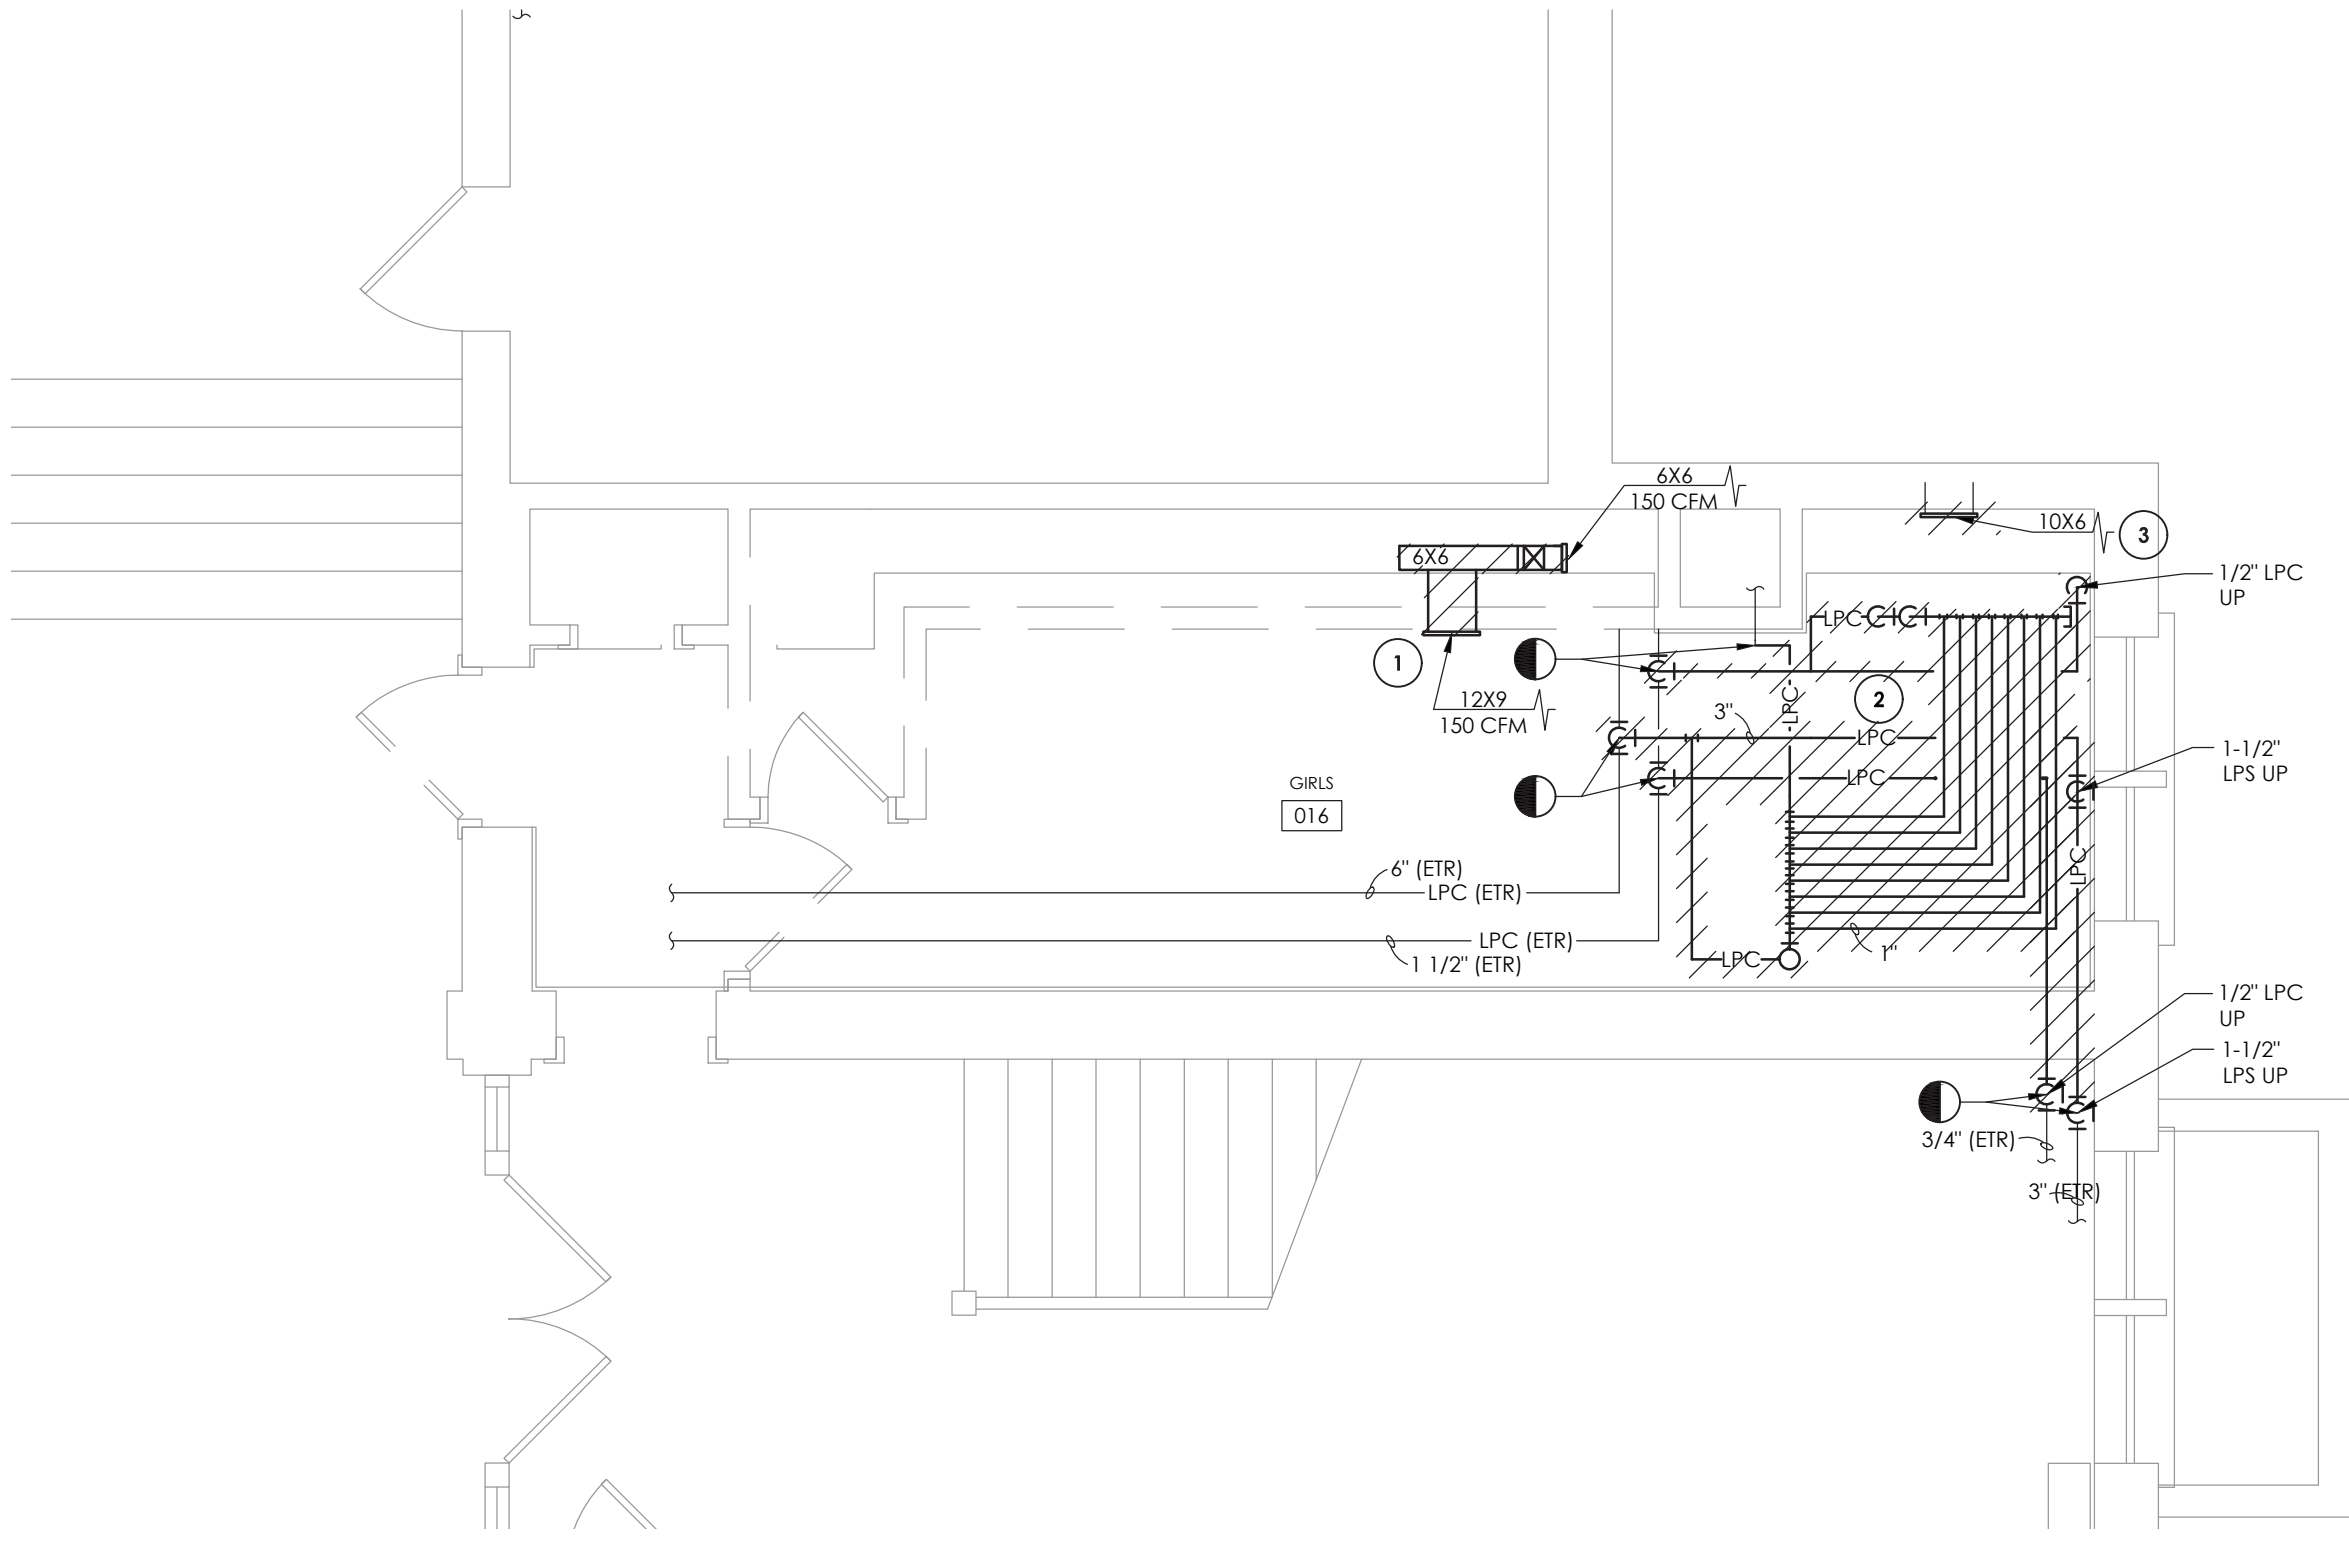

2
H100A
TOILET ROOM 016 DEMOLITION
SCALE: 1/4" = 1'-0"

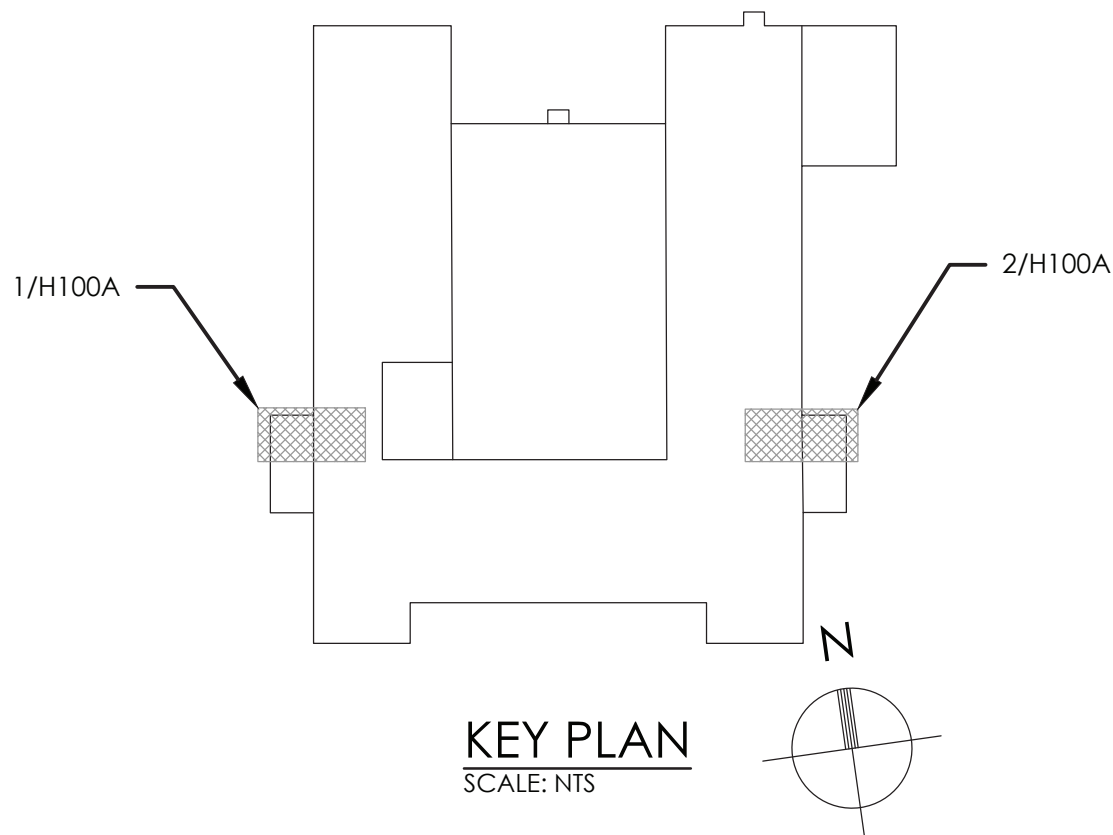

KEY PLAN
SCALE: NTS

- GENERAL NOTES:**
1. FIELD VERIFY EXACT DUCT AND PIPING LOCATIONS AND SIZES PRIOR TO DEMOLITION AND COORDINATE SPECIFIC POINTS OF REMOVAL LOCATIONS BASED ON NEW UNIT DIMENSIONS AND CONFIGURATIONS
- KEY NOTES:**
- 1 REMOVE EXISTING GRILLE AND EXHAUST DUCTWORK. PREPARE FOR NEW WORK.
 - 2 REMOVE EXISTING RADIATOR IN ITS ENTIRETY INCLUDING COVER, CONTROLS, AND PIPING BACK TO MAIN. PREPARE FOR NEW WORK.
 - 3 REMOVE EXISTING GRILLE AND CAP DUCTWORK.
 - 4 REMOVE LPS AND LPC UP TO 1ST AND 2ND FLOOR TOILET ROOMS, PREPARE FOR NEW WORK.



CPLteam.com
ARCHITECTURE • ENGINEERING • PLANNING

50 FRONT STREET, SUITE 202
NEWBURGH, NEW YORK 12550
TEL (800) 274-9000

REVISIONS		BY	DATE	DESCRIPTION
NO.				

POUGHKEEPSIE CITY SCHOOL DISTRICT
2020 CAPITAL IMPROVEMENT PROJECT
PHASE 1B: BUILDING IMPROVEMENTS

- ☐ POUGHKEEPSIE HIGH SCHOOL: SED# 13-15-00-01-0-007-018
- ☐ POUGHKEEPSIE MIDDLE SCHOOL: SED# 13-15-00-01-0-008-021
- ☐ POUGHKEEPSIE JUNIOR HIGH SCHOOL: SED# 13-15-00-01-0-009-021
- ☐ KREGER ELEMENTARY SCHOOL: SED# 13-15-00-01-0-004-014
- ☐ MORSE ELEMENTARY SCHOOL: SED# 13-15-00-01-0-002-014
- ☐ WARRING ELEMENTARY SCHOOL: SED# 13-15-00-01-0-005-013
- ☐ CLINTON ELEMENTARY SCHOOL: SED# 13-15-00-01-0-006-014
- ☐ COLUMBIUS ELEMENTARY SCHOOL: SED# 13-15-00-01-0-001-014

THIS DOCUMENT IS THE PROPERTY OF CPLTEAM, INC. AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF CPLTEAM, INC. THE USER OF THIS DOCUMENT AGREES TO HOLD CPLTEAM, INC. HARMLESS FROM AND AGAINST ALL CLAIMS, DAMAGES, LOSSES AND EXPENSES, INCLUDING REASONABLE ATTORNEY'S FEES, ARISING OUT OF OR RESULTING FROM THE USE OF THIS DOCUMENT.

DATE	DRAWN	CHECKED
10/20/2021	BEF	AJS

SCALE
1/4" = 1'-0"


SHEET TITLE
CLINTON ELEMENTARY SCHOOL BASEMENT TOILET ROOM DEMOLITION PLANS


PROJECT NUMBER
14078.09

CES
H100A
DRAWING NUMBER




- 1 EXISTING WEIL MCALAIN 1494 BOILER AND POWER FLAME WCR4-60-25 TO REMAIN.
- 2 THE CONTRACTOR SHALL COORDINATE SCHEDULING OF ALL WORK WITH OWNER TO PREPARE BOILER AND STEAM SYSTEM FOR DEMOLITION.
- 3 REMOVE EXISTING BOILER IN ITS ENTIRETY INCLUDING BURNER. DISCONNECT STEAM SUPPLY CONDENSATE RETURN FOS & R, AND GAS LINES TO POINTS INDICATED. PREPARE FOR NEW WORK.
- 4 THE CONTRACTOR SHALL PERFORM MAINTENANCE ON THE EXISTING HOT WATER HEATER.
- 5 COORDINATE SCHEDULING ALL WORK TO ISOLATE AND PREPARE FUEL GAS PIPING FOR DEMOLITION WORK. DISCONNECT AND REMOVE GAS TRAIN AND PIPING AS SHOWN. PREPARE REMAINING PIPING FOR NEW WORK.
- 6 REMOVE EXISTING WALL LOUVER AND DUCTWORK IN ITS ENTIRETY. PREPARE OPENING FOR NEW WORK.
- 7 DISCONNECT AND REMOVE EXISTING BOILER STACK AND BREACHING IN ITS ENTIRETY FOR BOTH REMOVED BOILER AND EXISTING TO REMAIN BOILER CES-B-1. DISCONNECT EXISTING HOT WATER HEATER FLUE FROM BREACHING AND PREPARE FOR NEW WORK.
- 8 DISCONNECT AND REMOVE EXISTING FUEL OIL PUMPS. REMOVE EXISTING FUEL OIL SUPPLY AND RETURN LINES TO POINTS INDICATED. PREPARE FOR NEW WORK.
- 9 REMOVE EXISTING FLASH TANK AND PIPING IN ITS ENTIRETY. CAP EXISTING COLD WATER PIPING AT LOCATION OF REMOVED PIPE.
- 10 LOCATE AND DEMOLISH THE CONDENSATE PUMP AND RECEIVER. DEMOLISH EXISTING PIPING AS NEEDED. PREPARE AREA FOR NEW WORK.

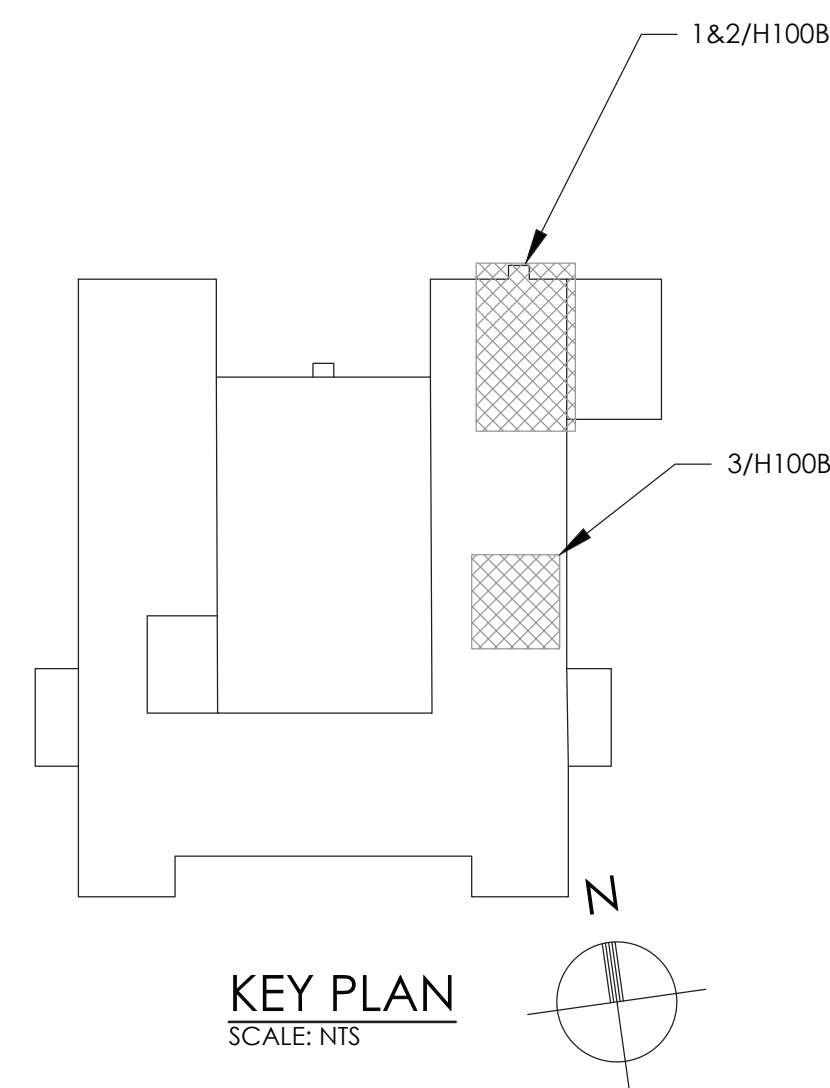

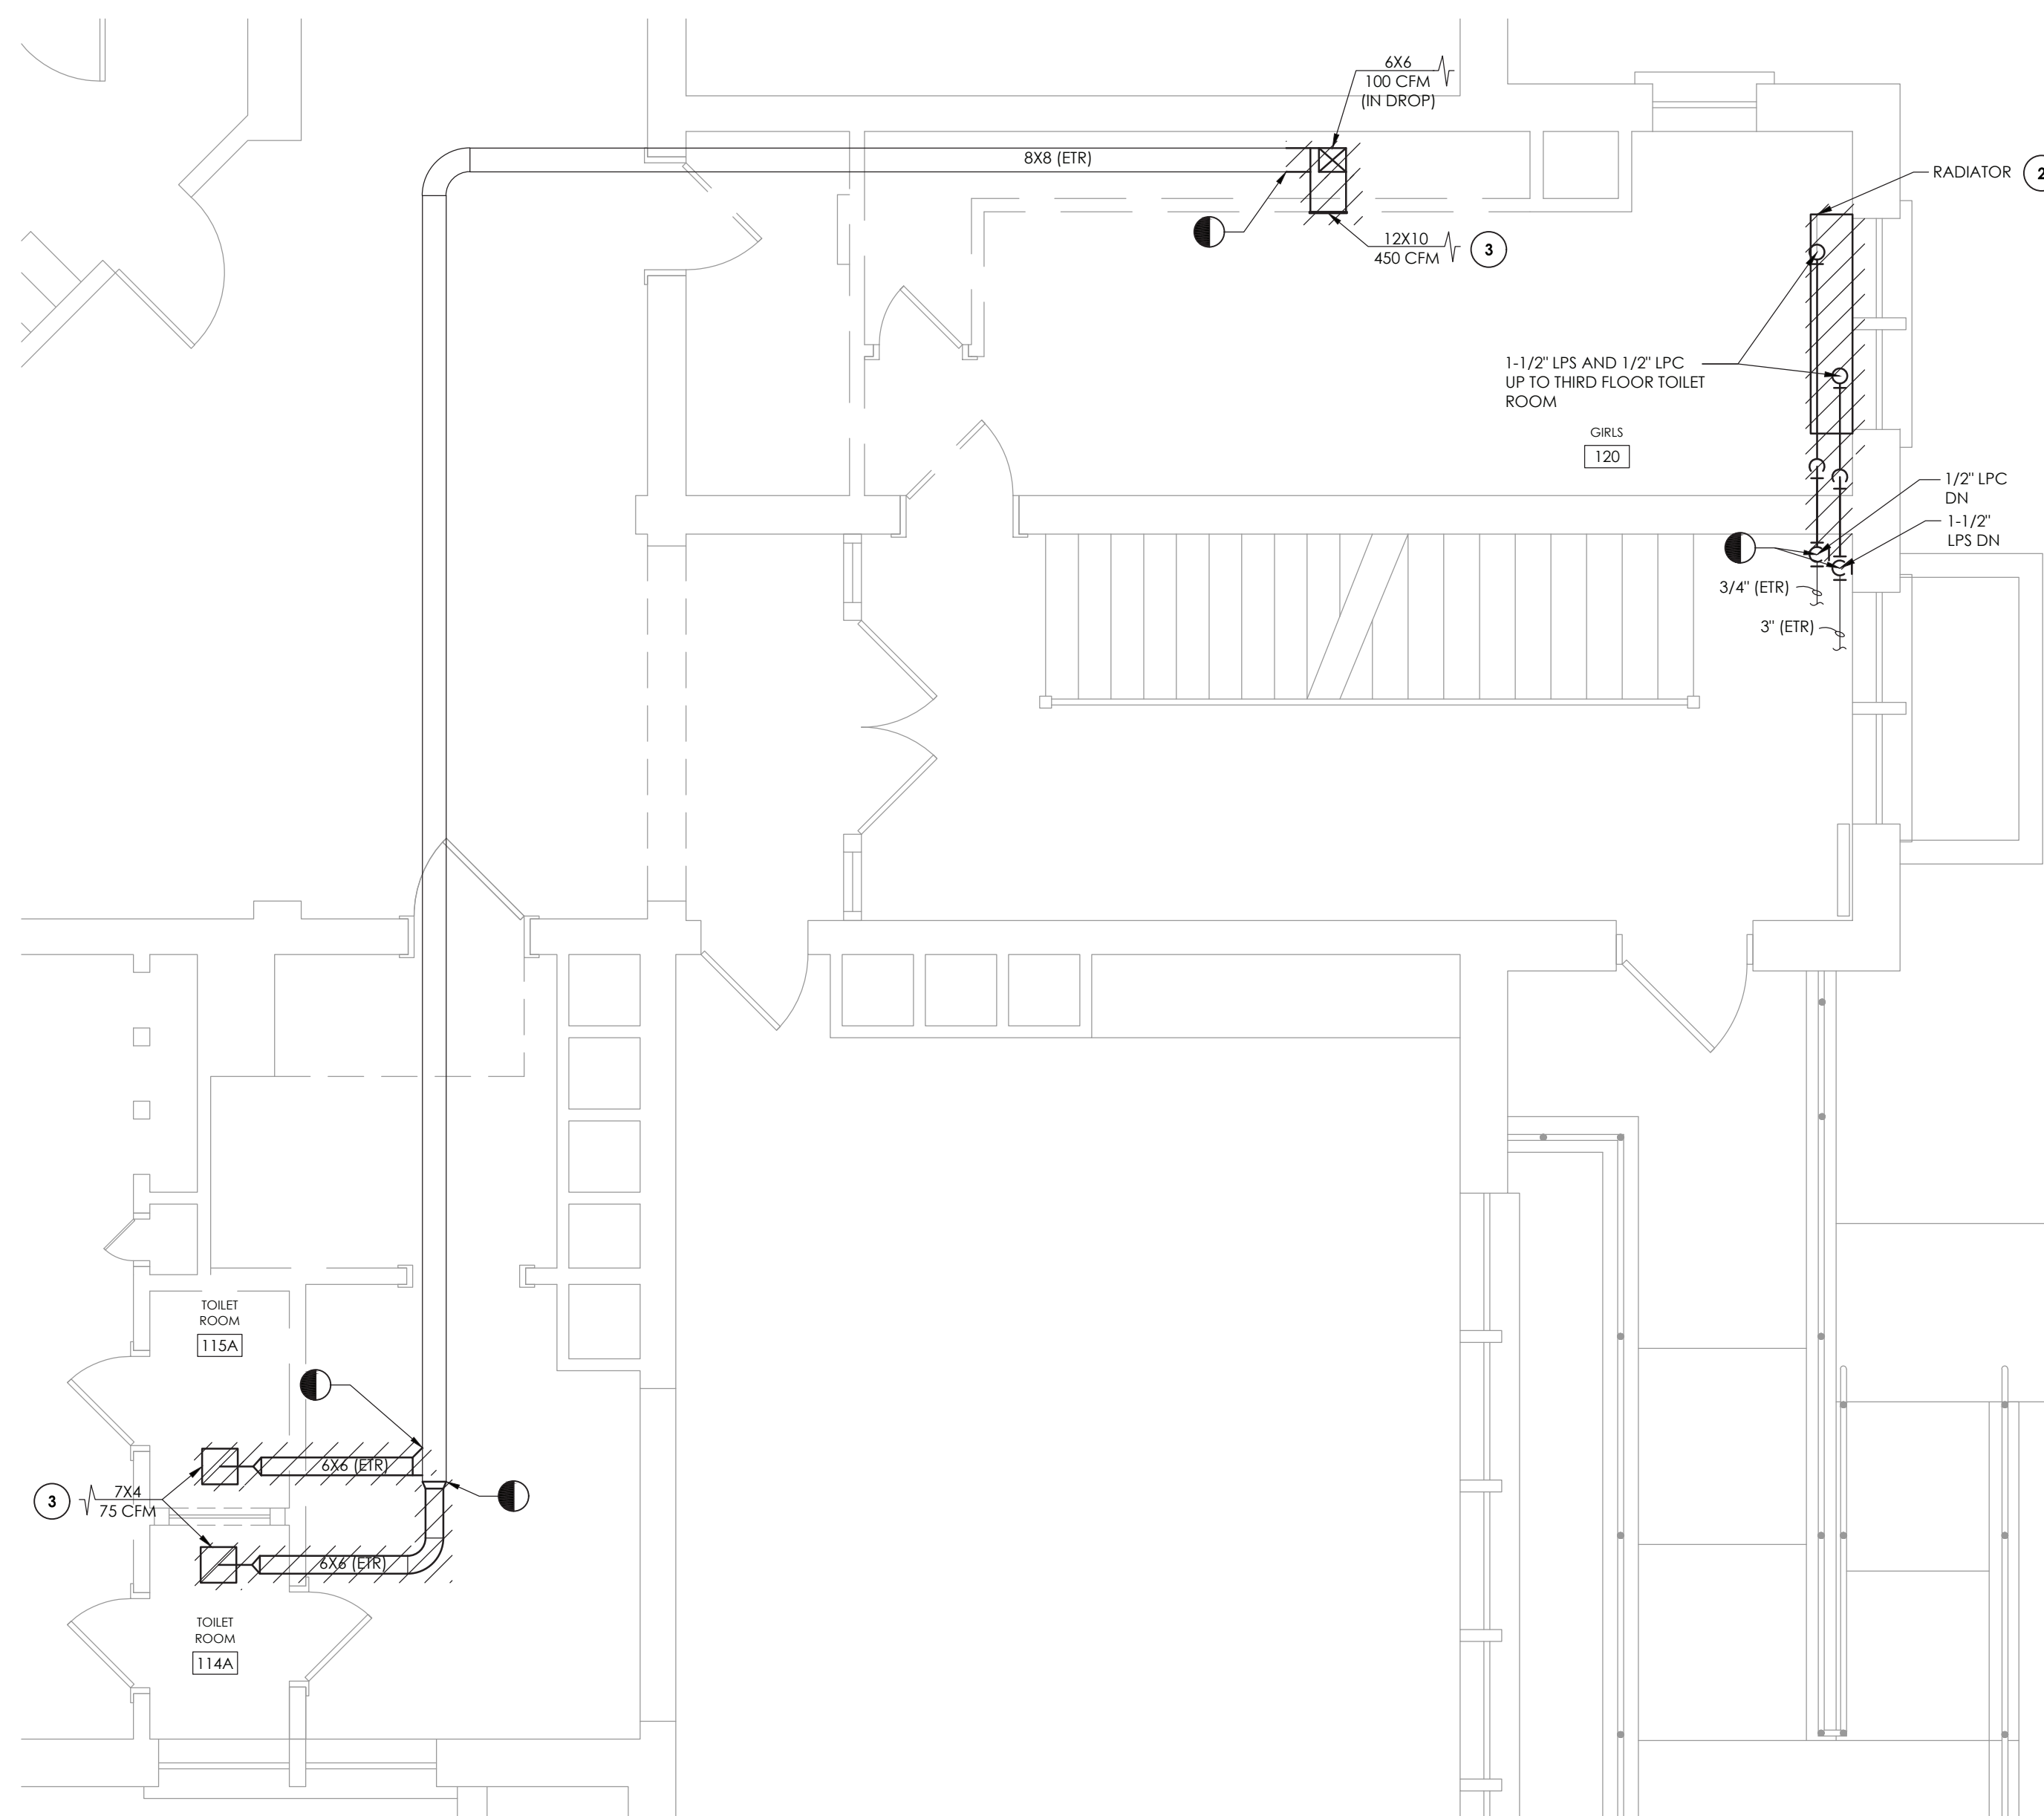

2 TOILET ROOM 120 DEMOLITION PLAN
H101 SCALE: 1/4" = 1'-0"

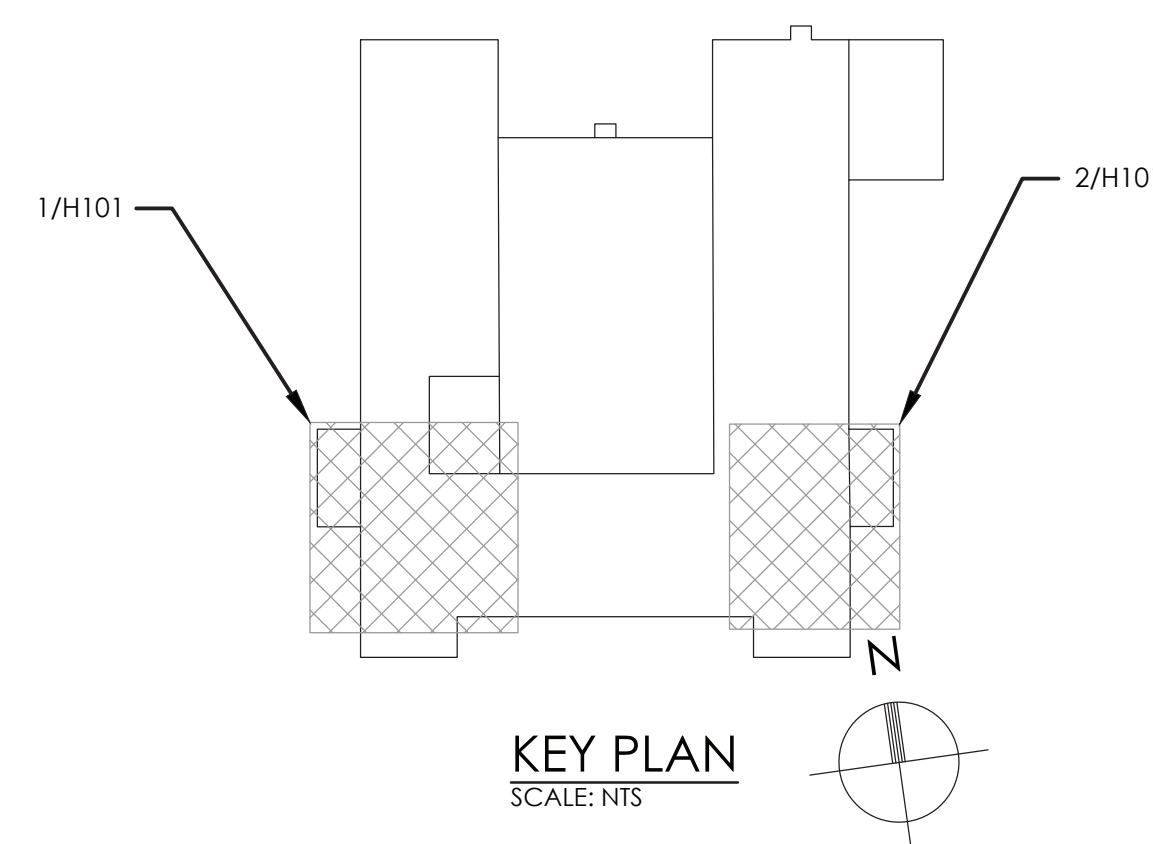

- ## **GENERAL NOTES:**
1. FIELD VERIFY EXACT DUCT AND PIPING LOCATIONS AND SIZES PRIOR TO DEMOLITION AND COORDINATE SPECIFIC POINTS OF REMOVAL LOCATIONS BASED ON NEW UNIT DIMENSIONS AND CONFIGURATIONS
- ## **KEY NOTES:**
- 1 REMOVE EXISTING GRILLE AND EXHAUST DUCTWORK IN ITS ENTIRETY. PREPARE FOR NEW WORK.
 - 2 REMOVE EXISTING RADIATOR IN ITS ENTIRETY INCLUDING COVER, CONTROLS, AND PIPING BACK TO MAIN. PREPARE FOR NEW WORK.
 - 3 REMOVE EXISTING GRILLE AND EXHAUST DUCTWORK TO POINT INDICATED. PREPARE FOR NEW WORK.
 - 4 REMOVE EXISTING CEILING MOUNTED EXHAUST FAN AND GRILLE. CAP AND ABANDON DUCTWORK IN PLACE.


[illegible]

**POUGHKEEPSIE CITY SCHOOL DISTRICT
2020 CAPITAL IMPROVEMENT PROJECT
PHASE 1 B: BUILDING IMPROVEMENTS**


- ☐ POUGHKEEPSIE HIGH SCHOOL: SEDF 13: 15:00:01-0:00:07-0:18
- ☐ PUGHKEEPSIE MIDDLE SCHOOL: SEDF 13: 15:00:01-0:00:07-0:18
- ☐ CLINTON ELEMENTARY SCHOOL: SEDF 13: 15:00:01-0:00:04-0:14
- ☐ CLINTON MIDDLE SCHOOL: SEDF 13: 15:00:01-0:00:04-0:14
- ☐ KRIEGER ELEMENTARY SCHOOL: SEDF 13: 15:00:01-0:00:06-0:14
- ☐ KRIEGER MIDDLE SCHOOL: SEDF 13: 15:00:01-0:00:06-0:14
- ☐ MORSE ELEMENTARY SCHOOL: SEDF 13: 15:00:01-0:00:02-0:14
- ☐ MORSE MIDDLE SCHOOL: SEDF 13: 15:00:01-0:00:02-0:14
- ☐ SMITH AVERY LEARNING CENTER: SEDF 13: 15:00:01-0:00:08-0:22
- ☐ SMITH AVERY LEARNING CENTER: SEDF 13: 15:00:01-0:00:08-0:22
- ☐ COLUMBUS ELEMENTARY SCHOOL: SEDF 13: 15:00:01-0:00:01-0:14

DATE 10/20/2021	DRAWN BEF	CHECKED AJS
SCALE 1/4" = 1'-0"		
SHEET TITLE CLINTON ELEMENTARY SCHOOL FIRST FLOOR TOILET ROOM DEMOLITION PLANS		




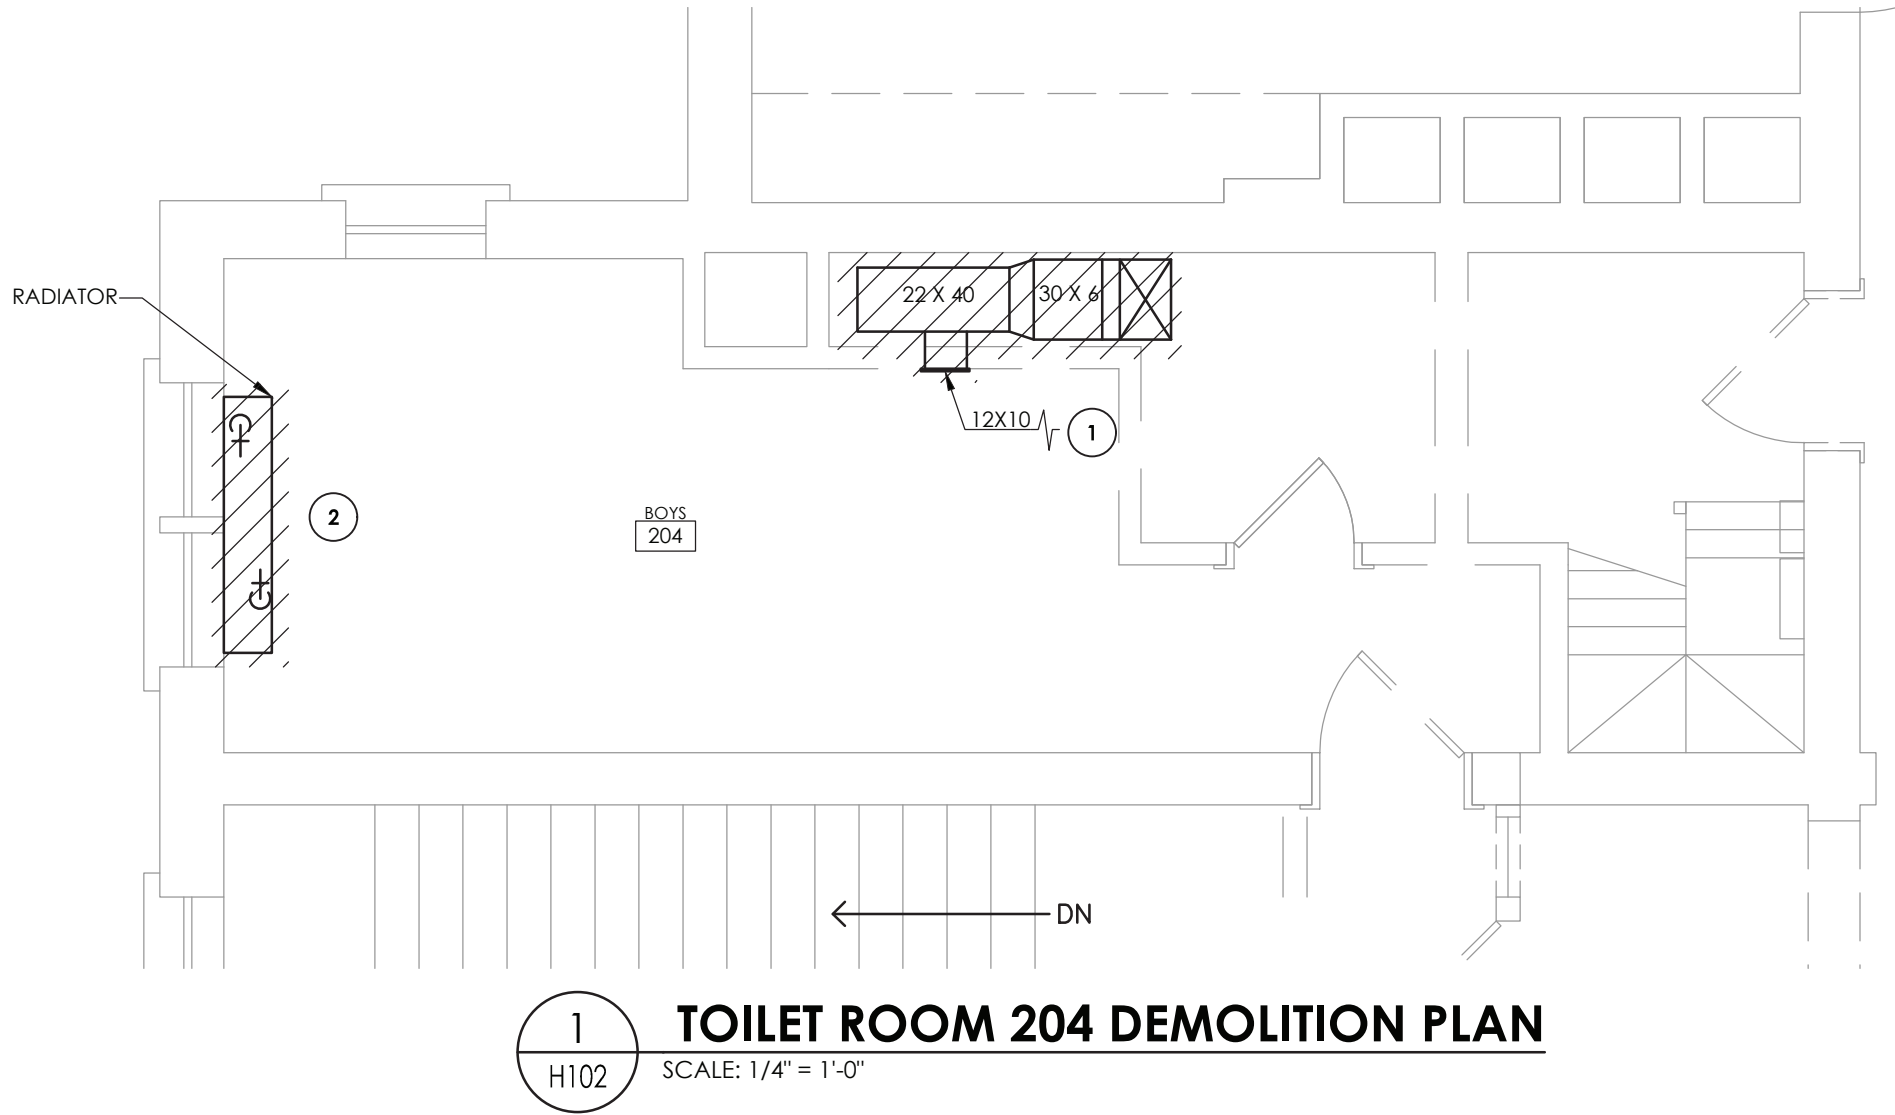

1
H102
TOILET ROOM 204 DEMOLITION PLAN
SCALE: 1/4" = 1'-0"

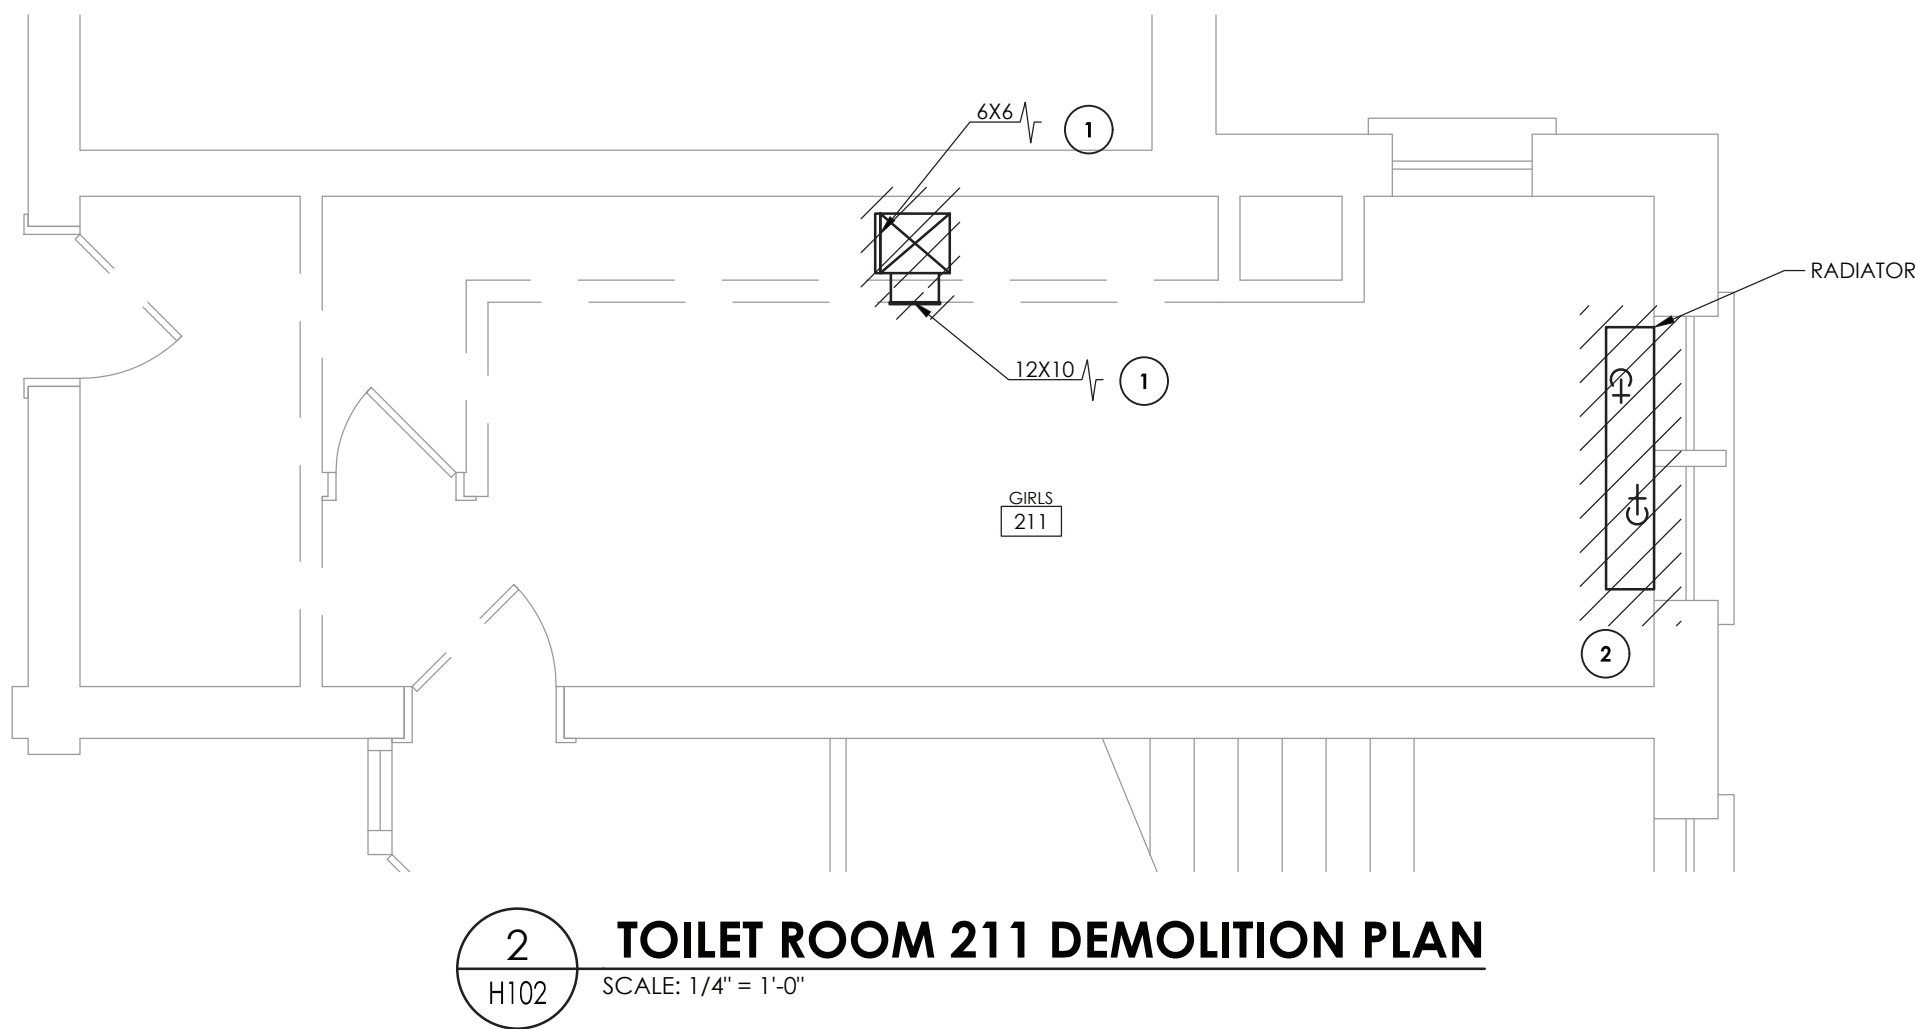

2
H102
TOILET ROOM 211 DEMOLITION PLAN
SCALE: 1/4" = 1'-0"

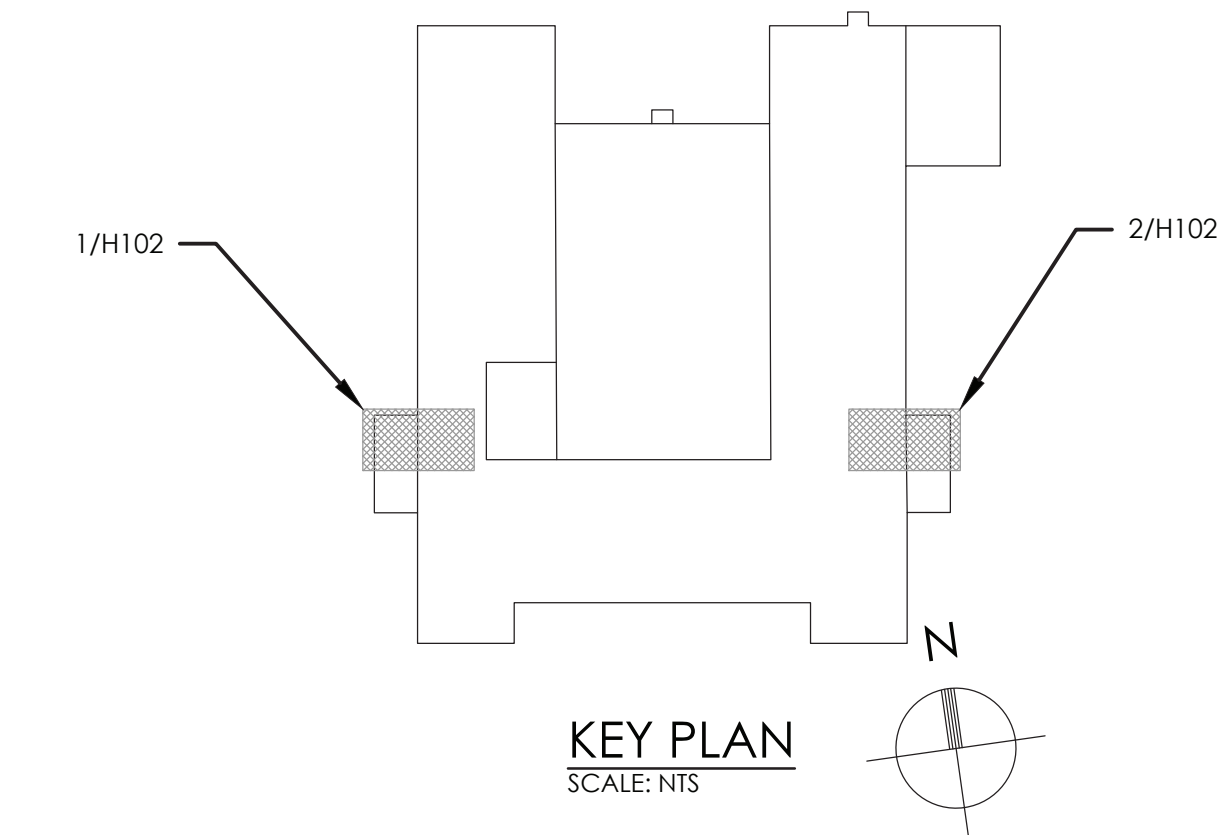

KEY PLAN
SCALE: NTS

GENERAL NOTES:

1. FIELD VERIFY EXACT DUCT AND PIPING LOCATIONS AND SIZES PRIOR TO DEMOLITION AND COORDINATE SPECIFIC POINTS OF REMOVAL LOCATIONS BASED ON NEW UNIT DIMENSIONS AND CONFIGURATIONS

KEY NOTES:

- 1 REMOVE EXISTING GRILLE AND DUCTWORK UP TO EXHAUST FAN. PREPARE FOR NEW WORK.
- 2 REMOVE EXISTING RADIATOR IN ITS ENTIRETY INCLUDING COVER, CONTROLS, AND PIPING BACK TO MAIN. PREPARE FOR NEW WORK.



CPLteam.com
ARCHITECTURE • ENGINEERING • PLANNING

50 FRONT STREET, SUITE 202
NEWBURGH, NEW YORK 12550
TEL (800) 274-9000

REVISIONS		DATE	BY	DESCRIPTION
NO.				



POUGHKEEPSIE CITY SCHOOL DISTRICT
2020 CAPITAL IMPROVEMENT PROJECT
PHASE 1B: BUILDING IMPROVEMENTS

☐ POUGHKEEPSIE HIGH SCHOOL: SED# 13-15-00-01-0-007-018

☐ POUGHKEEPSIE MIDDLE SCHOOL: SED# 13-15-00-01-0-008-021

☐ POUGHKEEPSIE JUNIOR HIGH SCHOOL: SED# 13-15-00-01-0-009-014

☐ KREGER ELEMENTARY SCHOOL: SED# 13-15-00-01-0-004-014

☐ MORSE ELEMENTARY SCHOOL: SED# 13-15-00-01-0-002-014

☐ WARRING ELEMENTARY SCHOOL: SED# 13-15-00-01-0-005-013

☐ CLINTON ELEMENTARY SCHOOL: SED# 13-15-00-01-0-006-014


☐ COLUMBIUS ELEMENTARY SCHOOL: SED# 13-15-00-01-0-001-014

DATE	DRAWN	CHECKED
10/20/2021	BEF	AJS
SCALE	1/4" = 1'-0"	
SHEET TITLE		
CLINTON ELEMENTARY SCHOOL SECOND FLOOR TOILET ROOM DEMOLITION PLANS		


PROJECT NUMBER
14078.09

CES
H102

DRAWING NUMBER

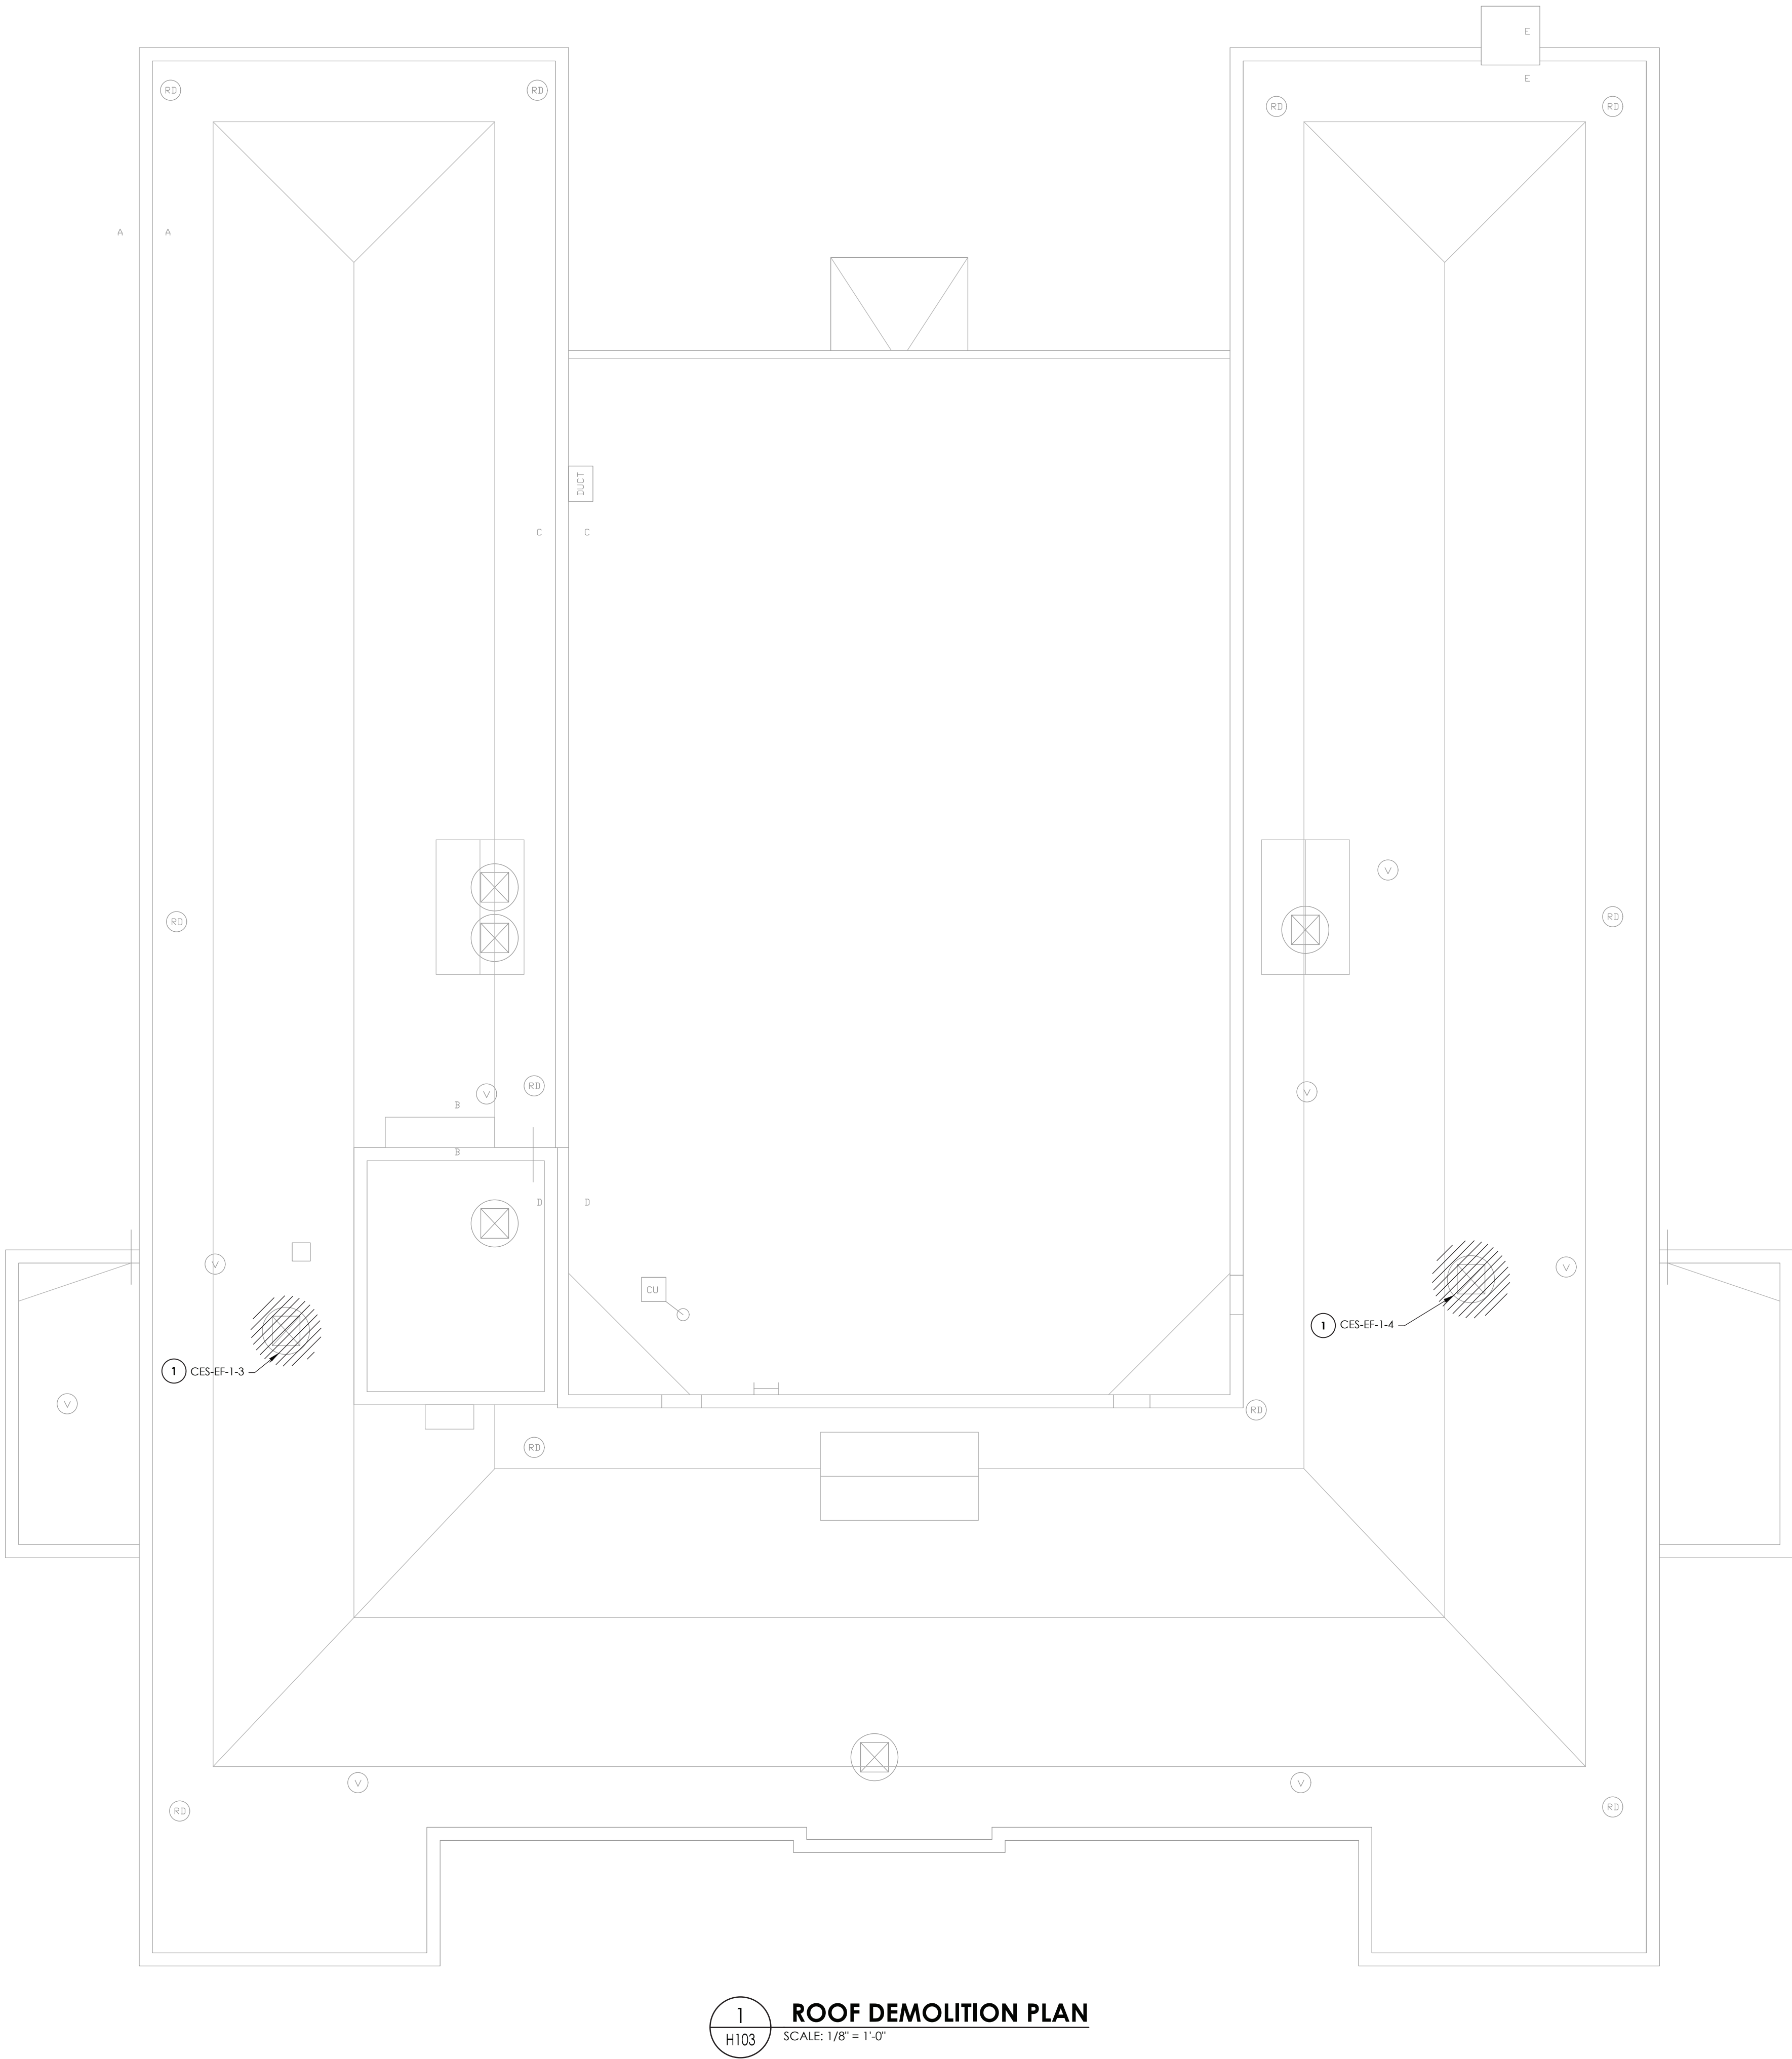

1
H103
ROOF DEMOLITION PLAN
SCALE: 1/8" = 1'-0"

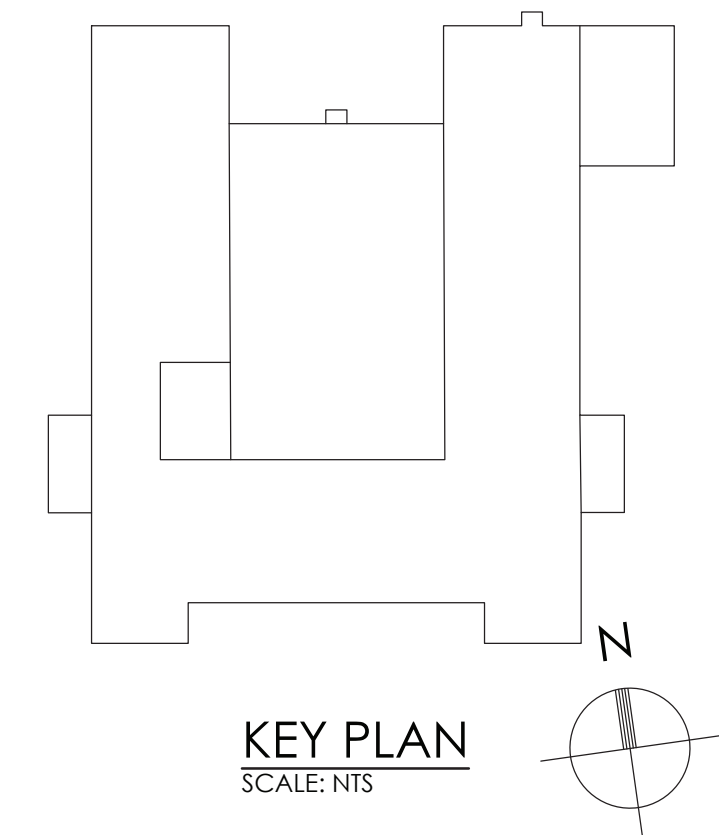

- GENERAL NOTES:**
1. FIELD VERIFY EXACT DUCT AND PIPING LOCATIONS AND SIZES PRIOR TO DEMOLITION AND COORDINATE SPECIFIC POINTS OF REMOVAL LOCATIONS BASED ON NEW UNIT DIMENSIONS AND CONFIGURATIONS
- KEY NOTES:**
1. REMOVE EXISTING EXHAUST FAN IN ITS ENTIRETY INCLUDING CURB, CONTROLS, AND ALL ASSOCIATED DUCTWORK. PREPARE FOR NEW WORK.



CPLteam.com
ARCHITECTURE • ENGINEERING • PLANNING

50 FRONT STREET, SUITE 202
NEWBURGH, NEW YORK 12550
TEL (800) 274-9000

REVISIONS		BY	DATE	DESCRIPTION
NO.	DATE			

POUGHKEEPSIE CITY SCHOOL DISTRICT
2020 CAPITAL IMPROVEMENT PROJECT
PHASE 1B: BUILDING IMPROVEMENTS

- ☐ POUGHKEEPSIE HIGH SCHOOL: SED# 13-15-00-01-0-007-018
- ☐ POUGHKEEPSIE MIDDLE SCHOOL: SED# 13-15-00-01-0-004-021
- ☐ POUGHKEEPSIE JUNIOR HIGH SCHOOL: SED# 13-15-00-01-0-004-014
- ☐ KREGER ELEMENTARY SCHOOL: SED# 13-15-00-01-0-004-014
- ☐ MORSE ELEMENTARY SCHOOL: SED# 13-15-00-01-0-002-014
- ☐ WARRING ELEMENTARY SCHOOL: SED# 13-15-00-01-0-005-013
- ☐ CLINTON ELEMENTARY SCHOOL: SED# 13-15-00-01-0-001-014
- ☐ COLUMBIUS ELEMENTARY SCHOOL: SED# 13-15-00-01-0-001-014

DATE	DRAWN	CHECKED
10/20/2021	BEF	AJS

SCALE: 1/8" = 1'-0"

SHEET TITLE

CLINTON ELEMENTARY
SCHOOL ROOF
DEMOLITION PLANS


PROJECT NUMBER

14078.09


**CES
H103**

DRAWING NUMBER


18. A VOUCHER OF THE NEW YORK STATE EDUCATION LAW AND THE COMMISSIONER'S REGULATIONS FOR ANY PERSON, INCLUDING ANY CONTRACTOR, ARCHITECT, ENGINEER OR LANDSCAPE ARCHITECT, TO ALTER AN ITEM IN ANY WAY, IN ANY MANNER, WITHOUT THE WRITTEN PERMISSION OF THE ARCHITECT, ENGINEER OR LANDSCAPE ARCHITECT, SHALL BE A VIOLATION OF THE NEW YORK STATE EDUCATION LAW AND THE COMMISSIONER'S REGULATIONS FOR ANY PERSON, INCLUDING ANY CONTRACTOR, ARCHITECT, ENGINEER OR LANDSCAPE ARCHITECT, TO ALTER AN ITEM IN ANY WAY, IN ANY MANNER, WITHOUT THE WRITTEN PERMISSION OF THE ARCHITECT, ENGINEER OR LANDSCAPE ARCHITECT.

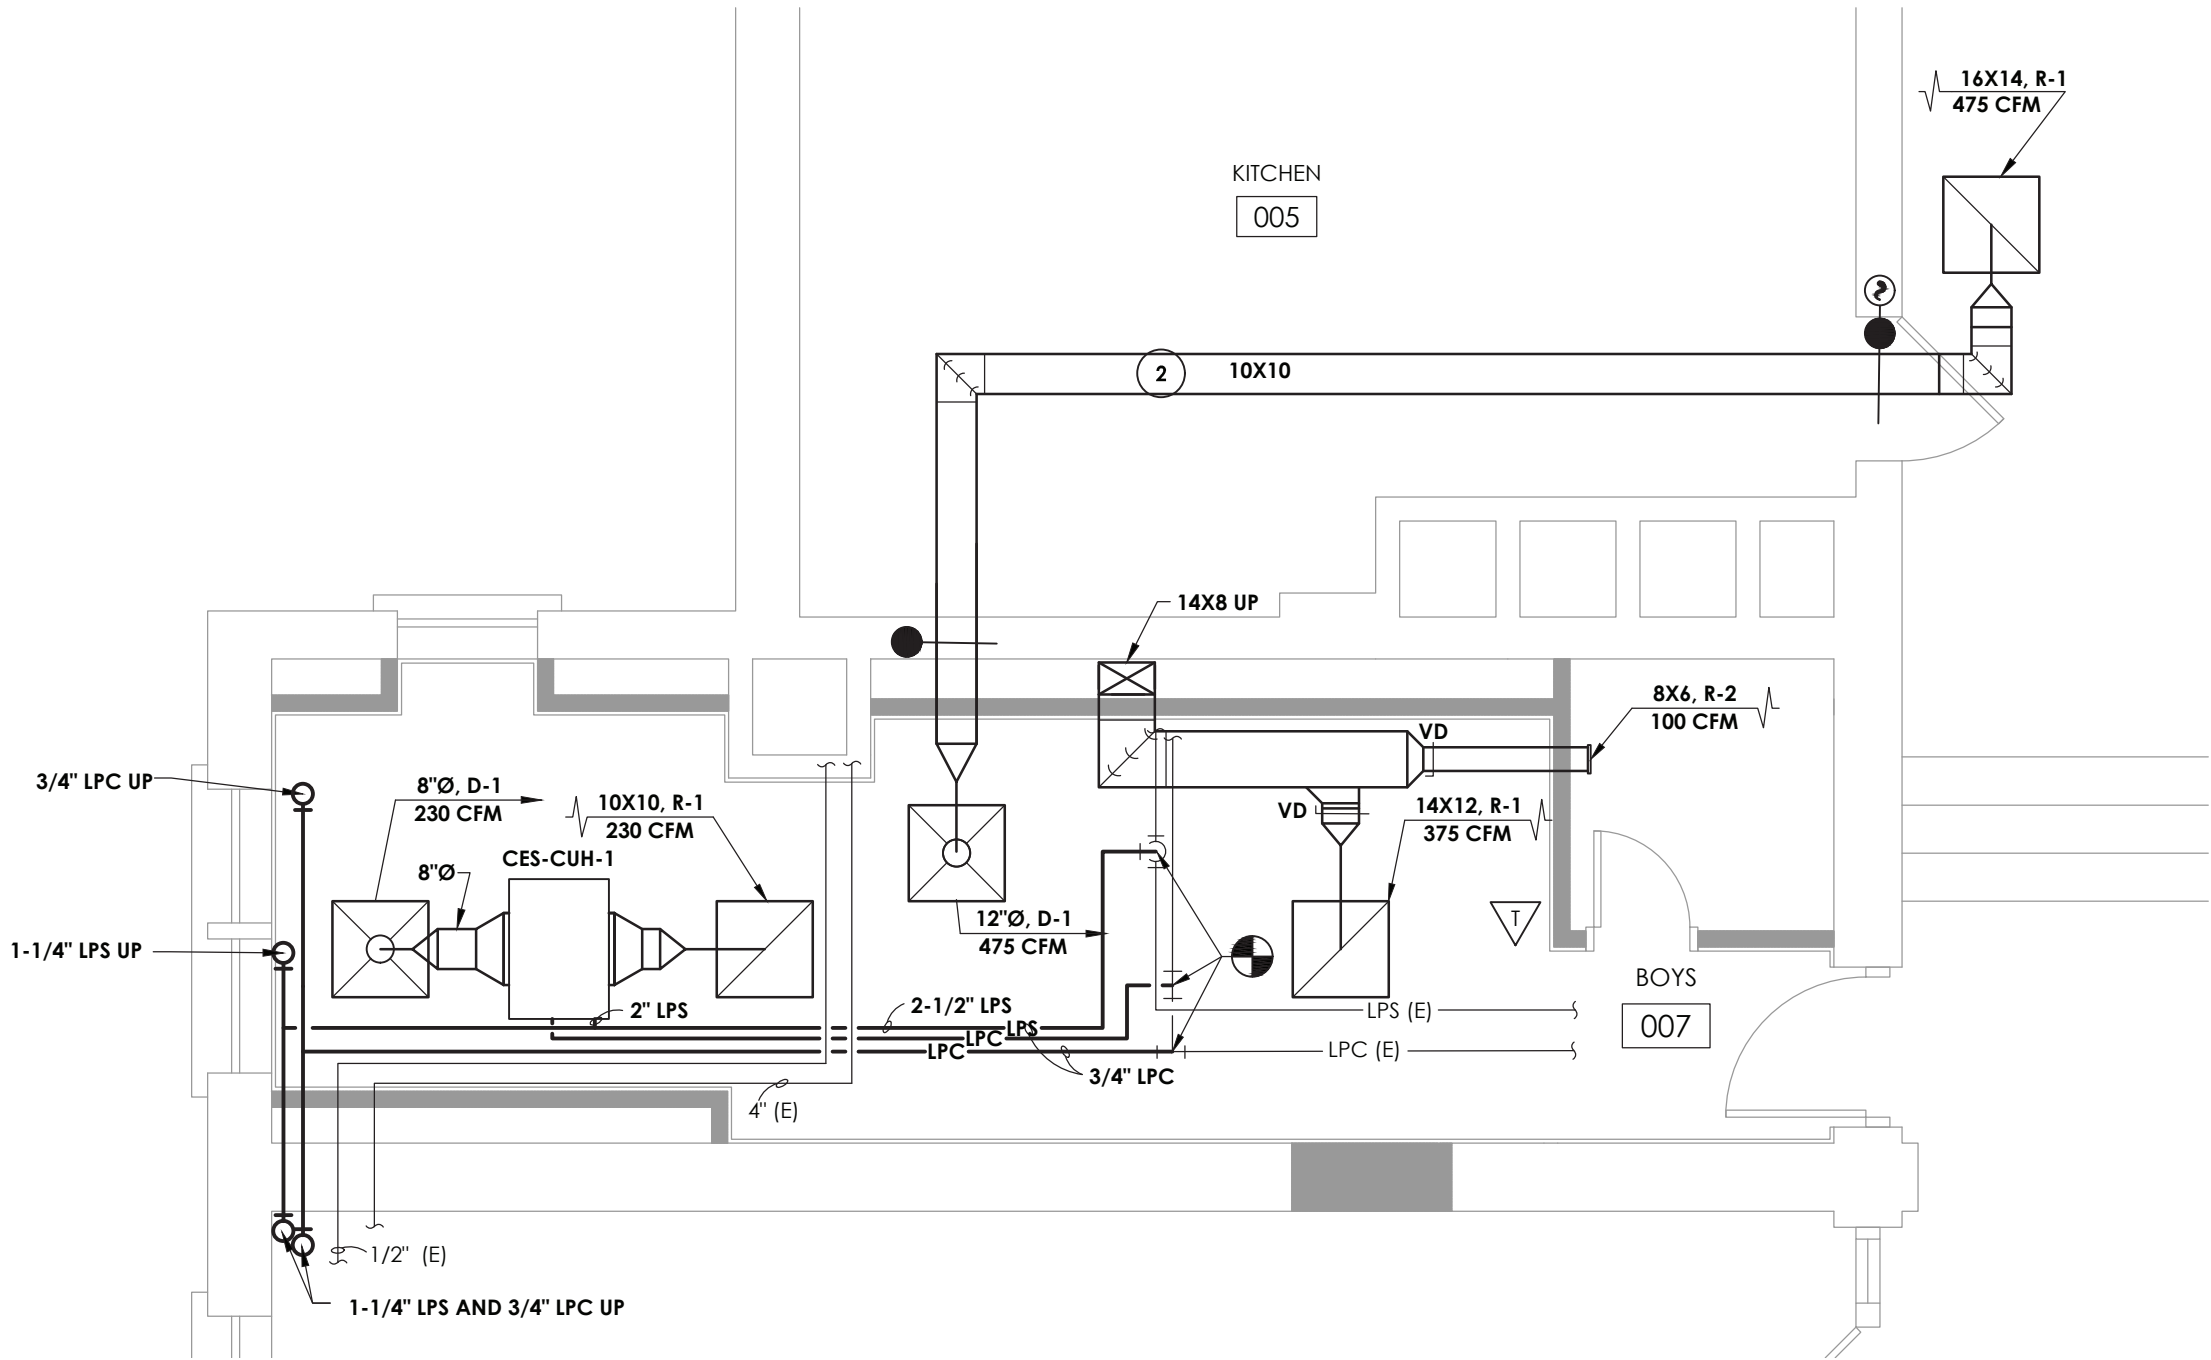

1
H200A
TOILET ROOM 007 NEW WORK PLAN
SCALE: 1/4" = 1'-0"

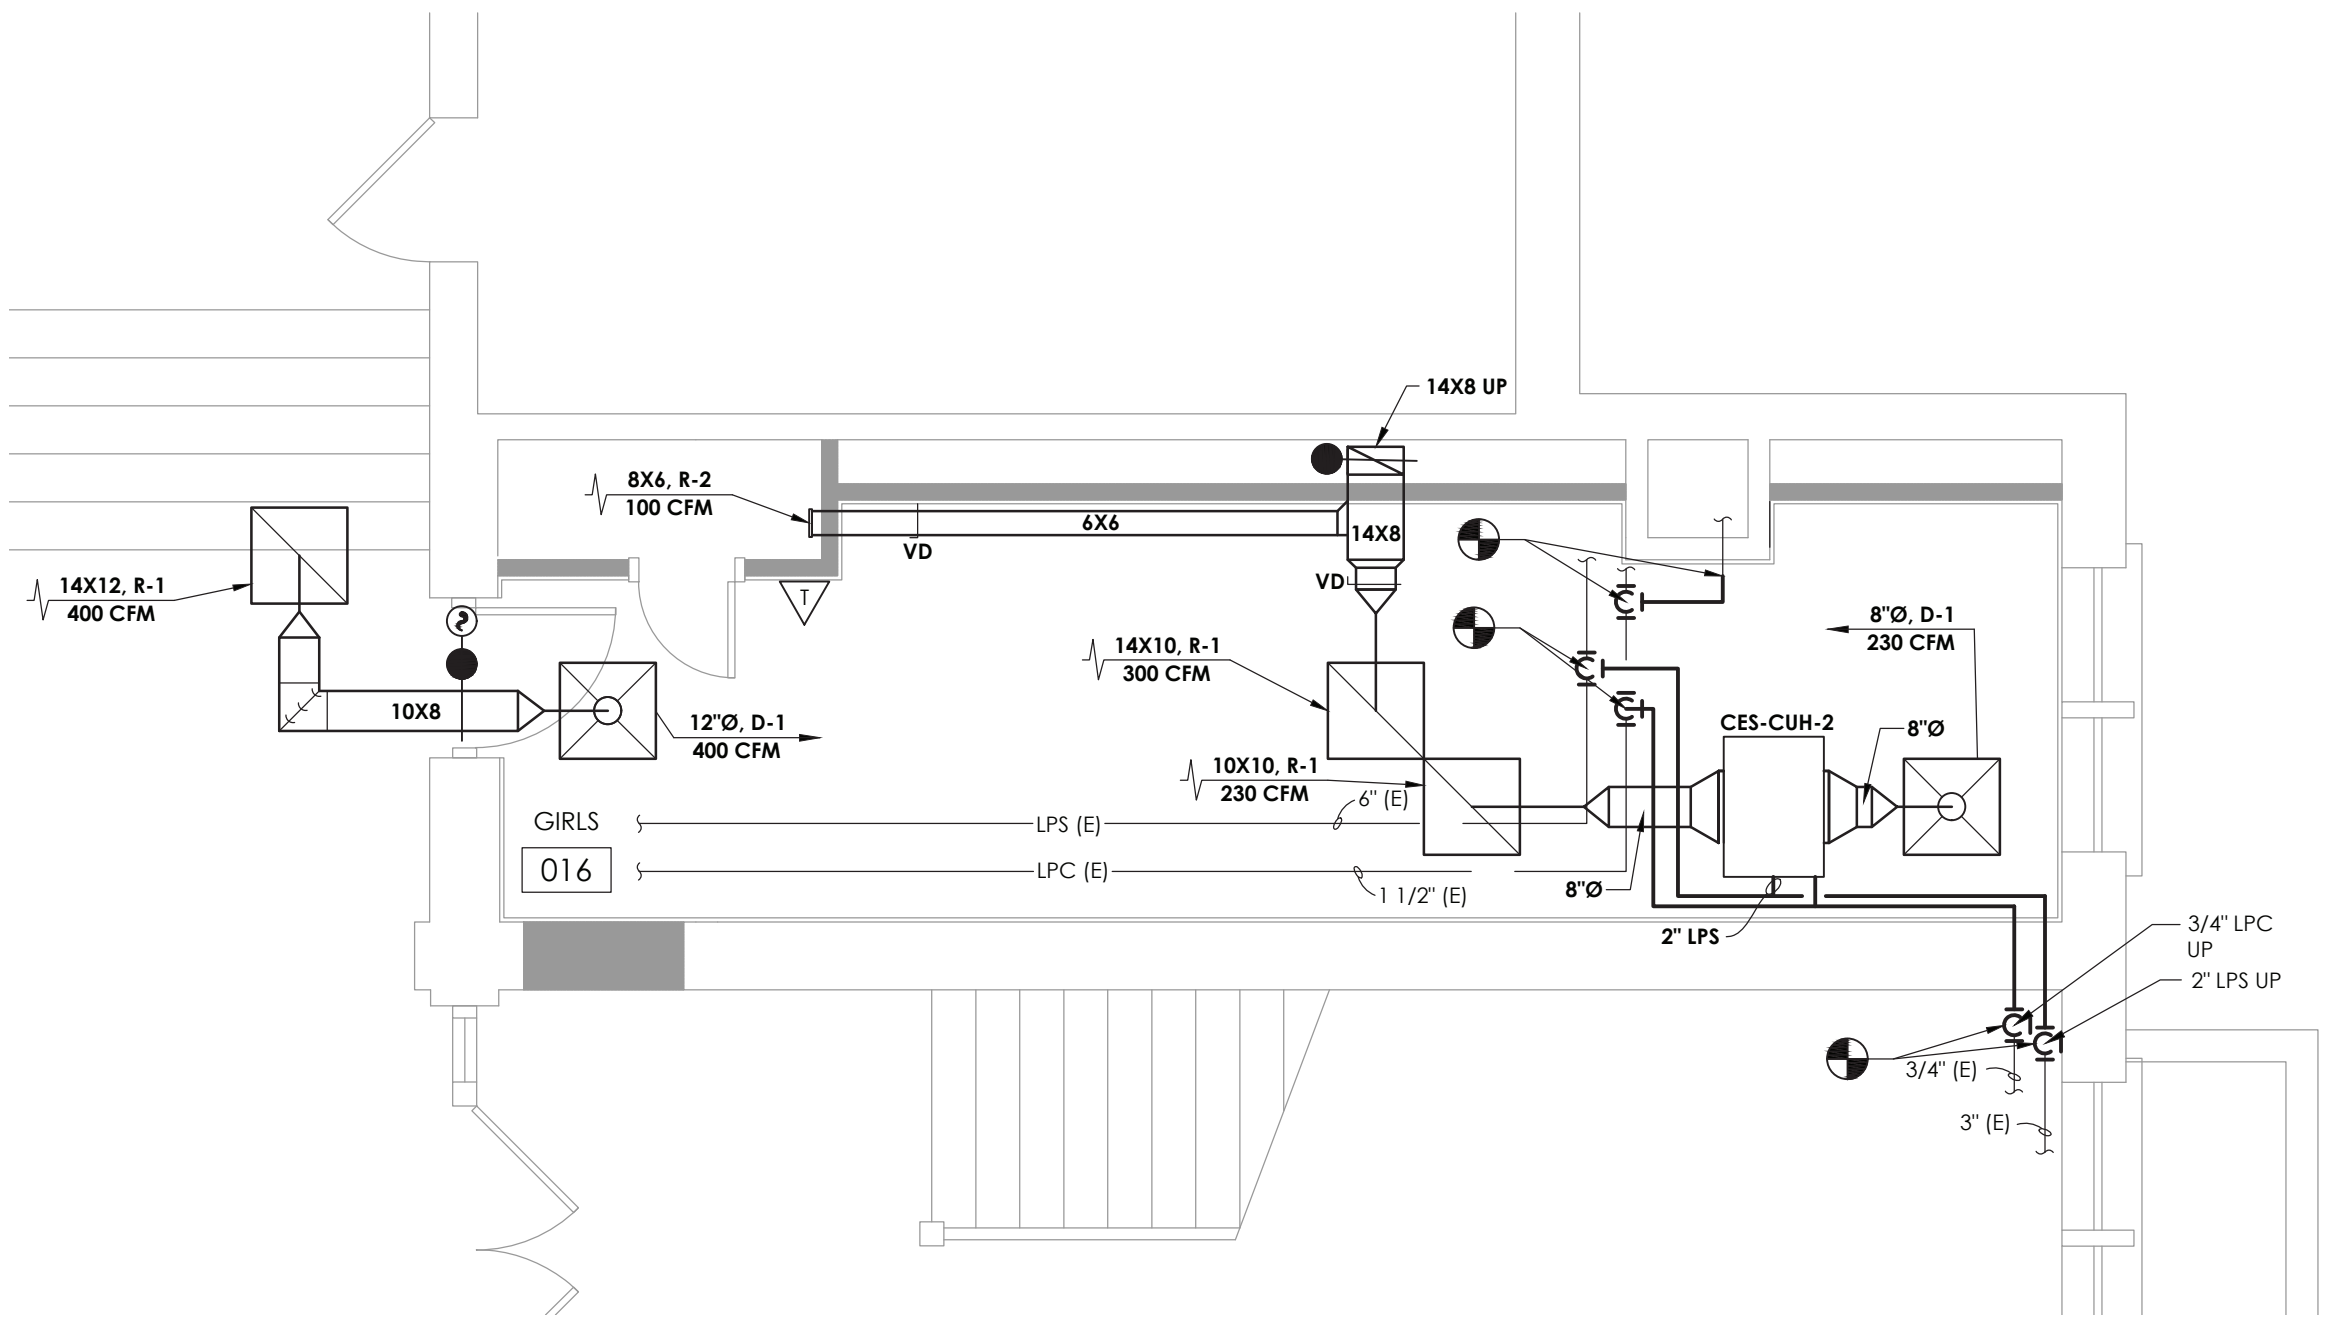

2
H200A
TOILET ROOM 16 NEW WORK PLAN
SCALE: 1/4" = 1'-0"

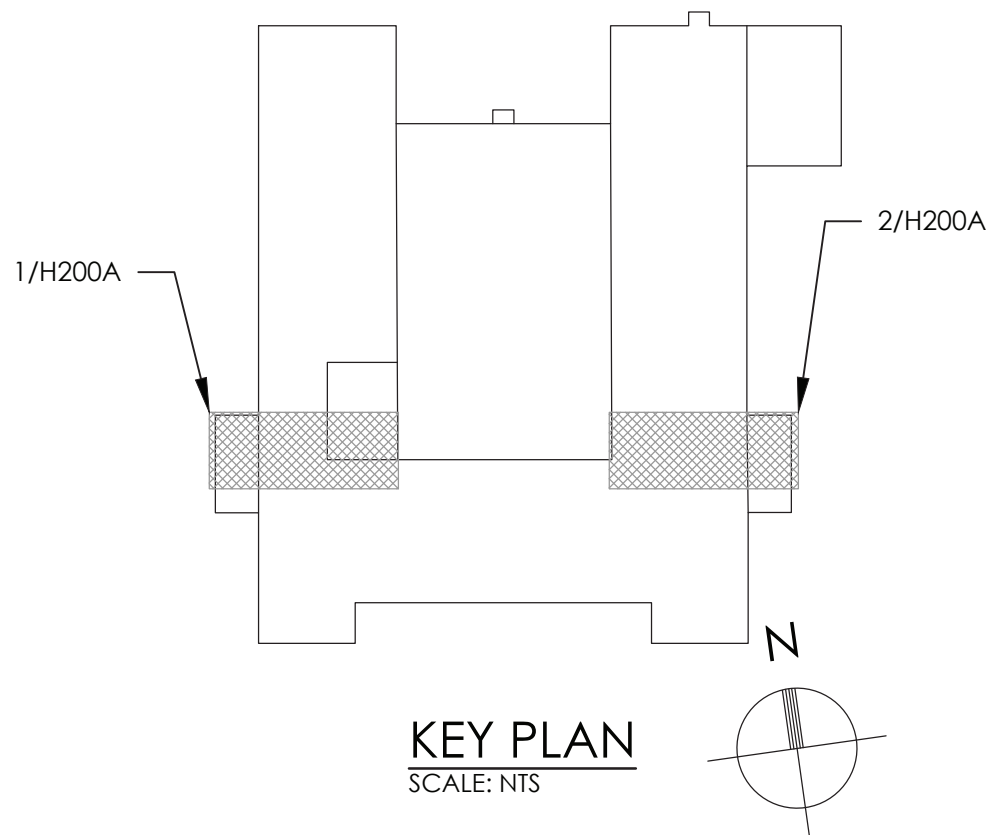

GENERAL NOTE:

1. ALL CONTROLS WORK SHALL BE PERFORMED BY TECHNICAL BUILDING SERVICES, INC.
CONTACT: ED ROCKSTROH
(P): (518) 885-4444
(E): edrockstroh@tbscontrols.com

KEY NOTES:

- 1 CONTRACTOR SHALL PROVIDE NEW WALL MOUNTED CONVECTORS INCLUDING, CONTROL VALVES, CONTROLS AND THERMOSTAT. SEE SCHEDULE.
- 2 COORDINATE CEILING REMOVAL/REINSTALLATION WITH G.C.



CPLteam.com
ARCHITECTURE • ENGINEERING • PLANNING

50 FRONT STREET, SUITE 202
NEWBURGH, NEW YORK 12550
TEL (800) 274-9000

REVISIONS	DESCRIPTION	
	NO.	DATE







POUGHKEEPSIE CITY SCHOOL DISTRICT
2020 CAPITAL IMPROVEMENT PROJECT
PHASE 1B: BUILDING IMPROVEMENTS

- ☐ POUGHKEEPSIE HIGH SCHOOL: SED# 13-15-00-01-0-007-018
- ☐ POUGHKEEPSIE MIDDLE SCHOOL: SED# 13-15-00-01-0-008-021
- ☐ POUGHKEEPSIE ELEMENTARY SCHOOL: SED# 13-15-00-01-0-009-014
- ☐ KREGER ELEMENTARY SCHOOL: SED# 13-15-00-01-0-004-014
- ☐ MORSE ELEMENTARY SCHOOL: SED# 13-15-00-01-0-002-014
- ☐ WARRING ELEMENTARY SCHOOL: SED# 13-15-00-01-0-005-013
- ☐ CLINTON ELEMENTARY SCHOOL: SED# 13-15-00-01-0-001-014
- ☐ COLUMBIUS ELEMENTARY SCHOOL: SED# 13-15-00-01-0-003-014


DATE	DRAWN	CHECKED
10/20/2021	BEF	AJS
SCALE: 1/4" = 1'-0"		
SHEET TITLE		
CLINTON ELEMENTARY SCHOOL BASEMENT TOILET ROOMS NEW WORK PLANS		

PROJECT NUMBER
14078.09

**CES
H200A**
DRAWING NUMBER



- 1) CONTRACTOR SHALL PROVIDE AND INSTALL NEW DUAL FUEL BOILER INCLUSIVE OF NEW TRIM, BOILER LEVEL CONTROLS, AND SAFETIES AS REQUIRED BY CODE AND LOCAL AUTHORITIES HAVING JURISDICTION. CONTRACTOR SHALL ENGAGE A FACTORY AUTHORIZED TECHNICIAN TO EXECUTE AND DOCUMENT ALL MANUFACTURES SUGGESTED START UP AND COMMISSIONING TESTING INCLUDING THE BOILER, FUEL SYSTEMS, AND ALL RELATED CONTROL SYSTEMS.
- 2) PROVIDE A NEW DUAL FUEL MODULATING BURNER SYSTEM INCLUDING AIR DENSITY BURNER MANAGEMENT SYSTEM, AND ANNUNCIATION SYSTEM.
- 3) INSTALL CONCRETE HOUSEKEEPING PAD PER PLANS TO ACCOMMODATE THE NEW BOILERS. PROVIDE NEOPRENE VIBRATION ISOLATION PAD AT BOILER BASE MOUNTING POINTS.
- 4) PROVIDE AND INSTALL NEW PIPING, HANGERS, SUPPORTS, ACCESSORIES, AND FIBERGLASS INSULATION ACCORDING TO PLANS AND POINTS OF CONNECTION. REFER TO DETAILS AND SCHEDULES. MANUFACTURED FITTINGS SHALL BE INSTALLED ACCORDING TO THE MANUFACTURERS REQUIREMENTS AND TOLERANCES.
- 5) CONTRACTORS SHALL ENGAGE A LOCAL SUPPLIER AND INSTALL NEW BOILER FEED WATER CHEMICAL TREATMENT SYSTEMS.
- 6) COORDINATE WITH NEW CHEMICAL TREATMENT SYSTEM. RECONNECT BOILER FEED WATER PIPING TO NEW BOILERS PER MANUFACTURING REQUIREMENTS INCLUDING ALL NEW SAFETY AND CONTROLS DEVICES AND CONNECTIONS AS REQUIRED FOR A FULLY FUNCTIONAL AND COMPLIANT SYSTEM. CONTRACTOR SHALL START UP AND COMMISSION BOILER FEED SYSTEM.
- 7) PROVIDE AND INSTALL NEW FUEL GAS PIPING FROM MAIN TO NEW GAS TRAIN. SEE DETAILS FOR NEW GAS TRAIN CONNECTION SCHEMATIC.
- 8) PROVIDE AND INSTALL NEW DRAIN PIPING AND CONNECTION TO EXISTING FLOOR DRAIN.
- 9) PROVIDE AND INSTALL FUEL OIL FEED PUMP. RECONNECT TO EXISTING FUEL OIL SUPPLY AND RETURN PIPING. MODIFY PIPING AS NECESSARY FOR RECONNECTION.
- 10) CONTRACTOR SHALL PROVIDE AND INSTALL COMBUSTION AIR LOUVERS. CONTRACTOR SHALL FIELD VERIFY AND COORDINATE WITH FIELD CONDITIONS. BALANCE ACCORDING TO SPECIFICATIONS. MODIFY OPENING AS NECESSARY AND PATCH WITH LIKE CONSTRUCTION.
- 11) PROVIDE NEW BREECHING FOR NEW AND EXISTING BOILERS. RUN BREECHING UP THROUGH EXISTING CHIMNEY AND TERMINATE 5' ABOVE ROOF LINE WITH VENT CAP. RECONNECT EXISTING HOT WATER HEATER FLUE TO NEW BREECHING.
- 12) PROVIDE AND INSTALL NEW BOILER FEED PUMP. RECONNECT EXISTING CONDENSATE PIPING. MODIFY PIPING AS NECESSARY FOR RECONNECTION.
- 13) PROVIDE AND INSTALL NEW CONDENSATE PUMP AND RECEIVER. RECONNECT EXISTING CONDENSATE PIPING. MODIFY PIPING AS NECESSARY FOR RECONNECTION.

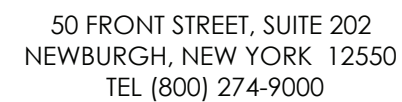

REVISIONS			DESCRIPTION
NO.	DATE	BY	


[illegible]

DATE 10/20/2021	DRAWN BEF	CHECKED AJS
SCALE 1/4" = 1'-0"		
SHEET TITLE		
CLINTON ELEMENTARY SCHOOL BOILER NEW WORK PLANS		


PROJECT NUMBER
14078.09

CES
H200B


DRAWING NUMBER

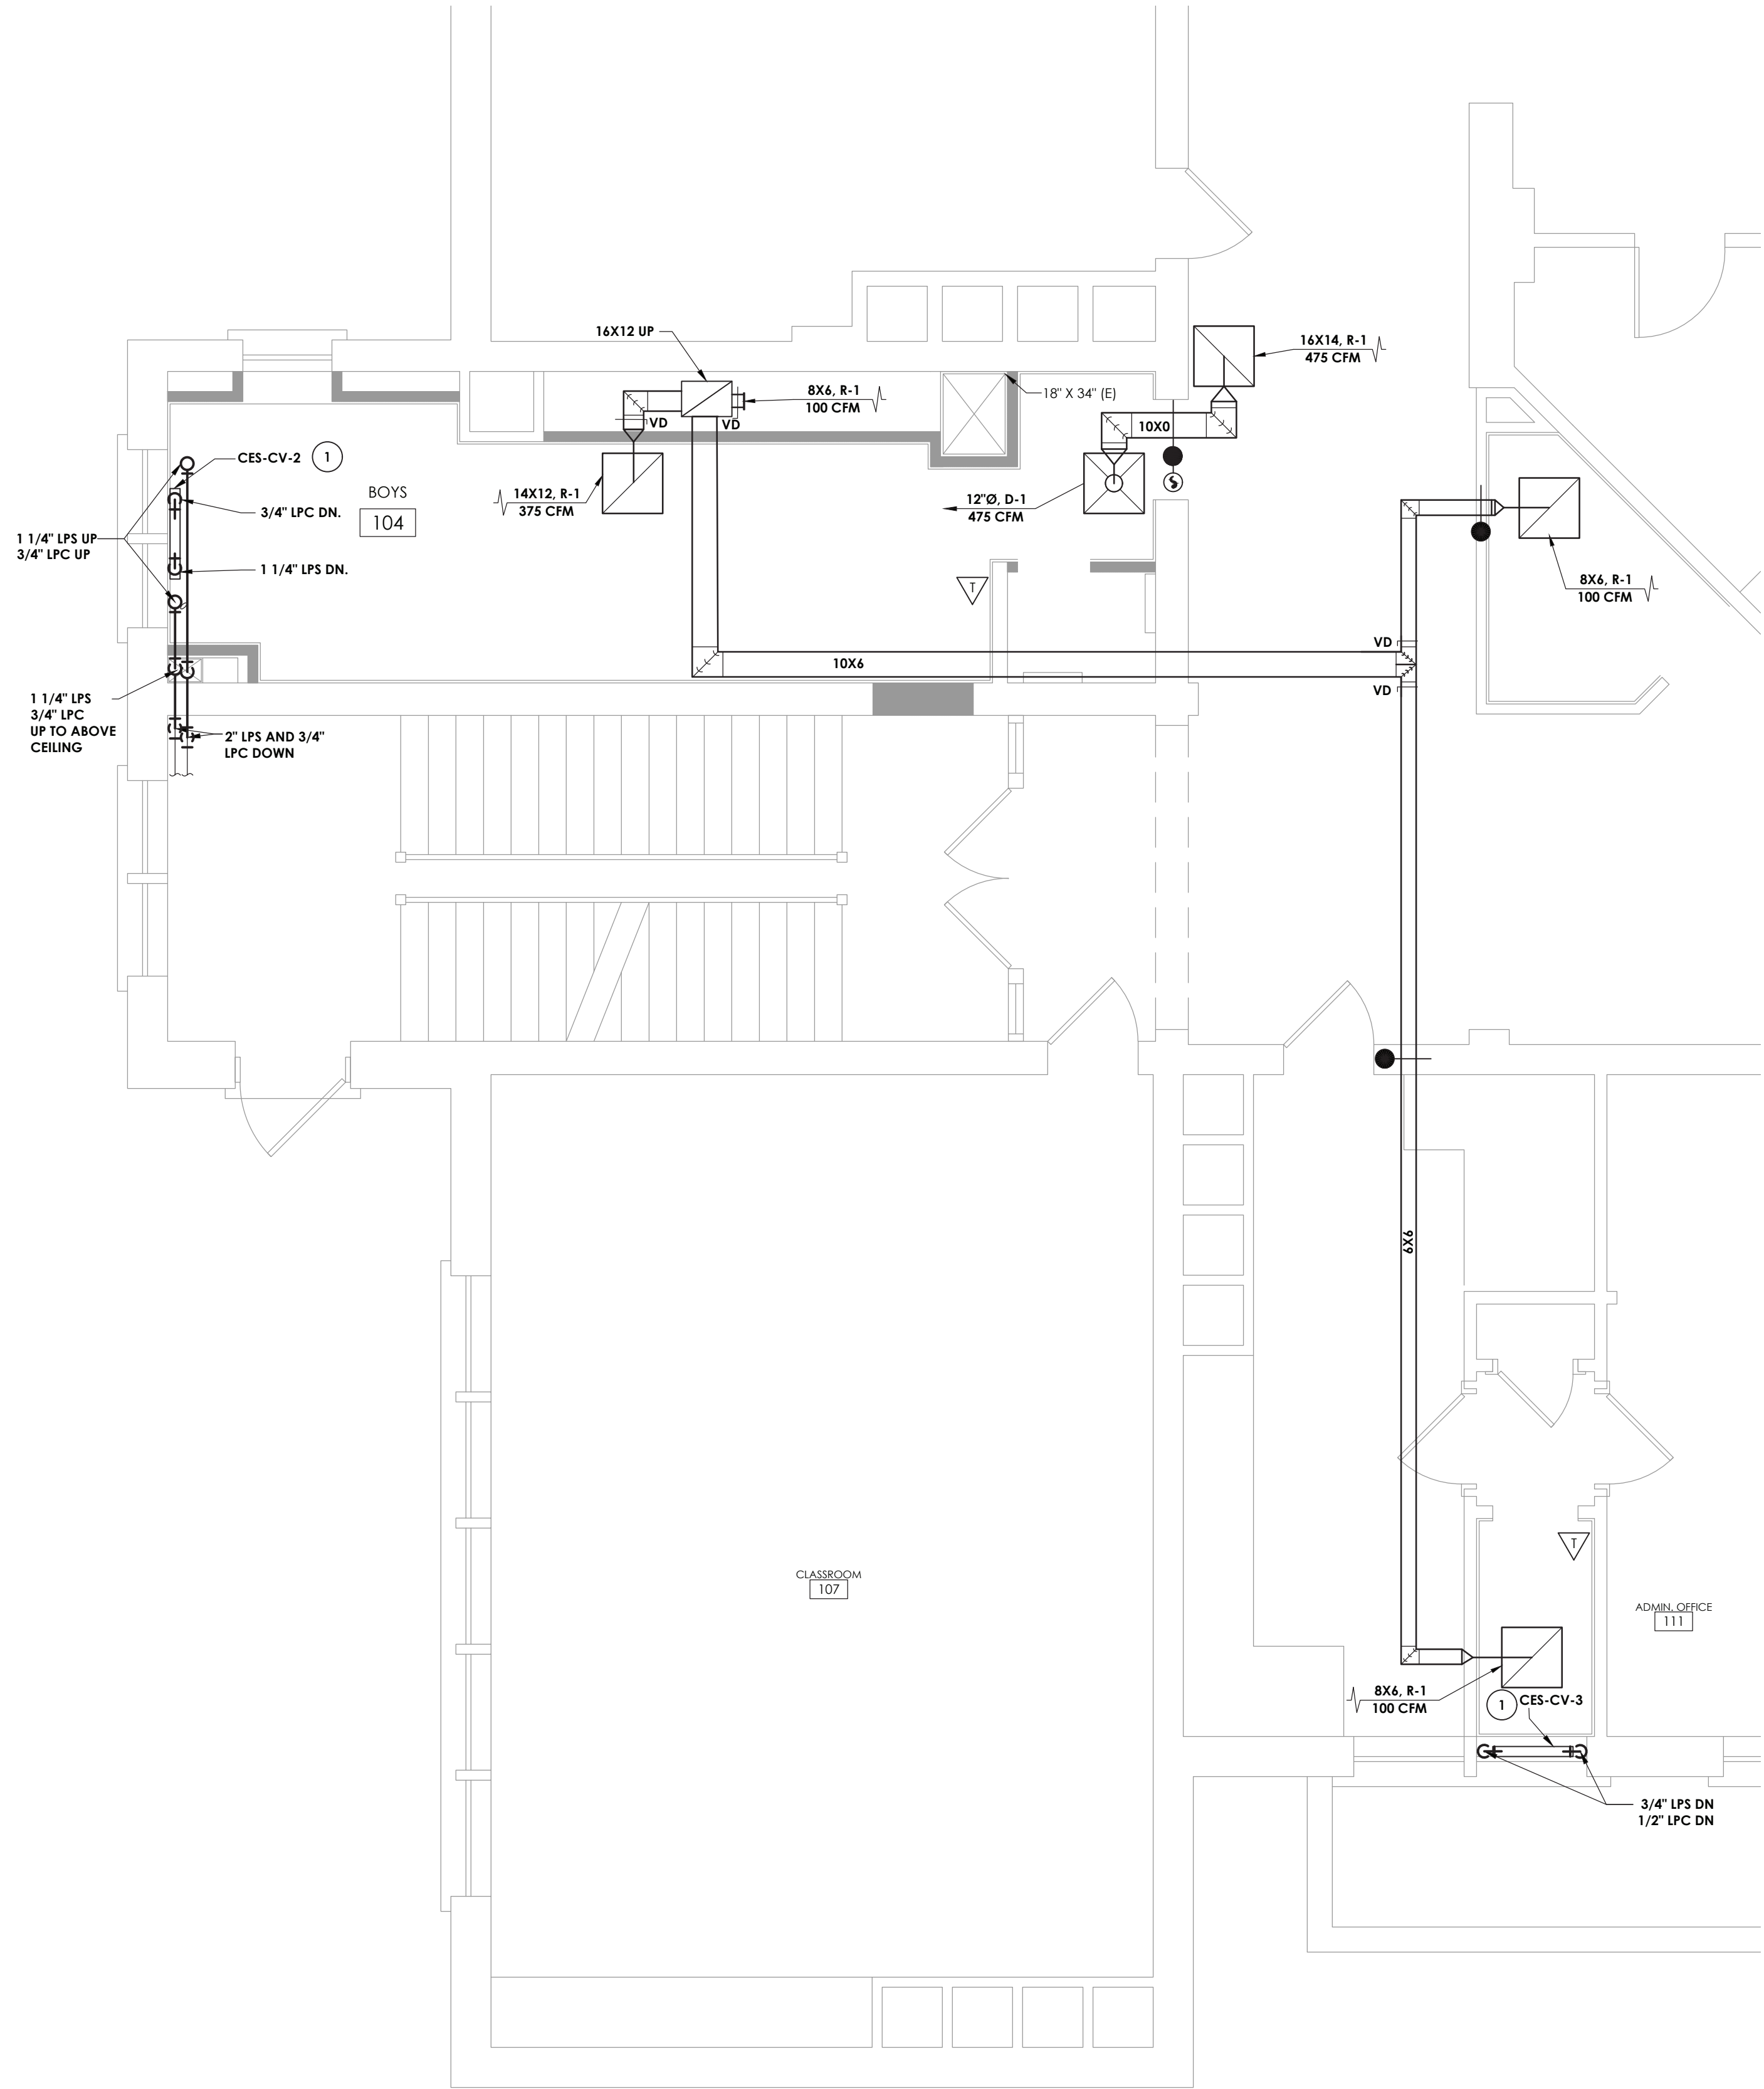

1 TOILET ROOMS 104,111, & 4 NEW WORK PLAN
SCALE: 1/4" = 1'-0"

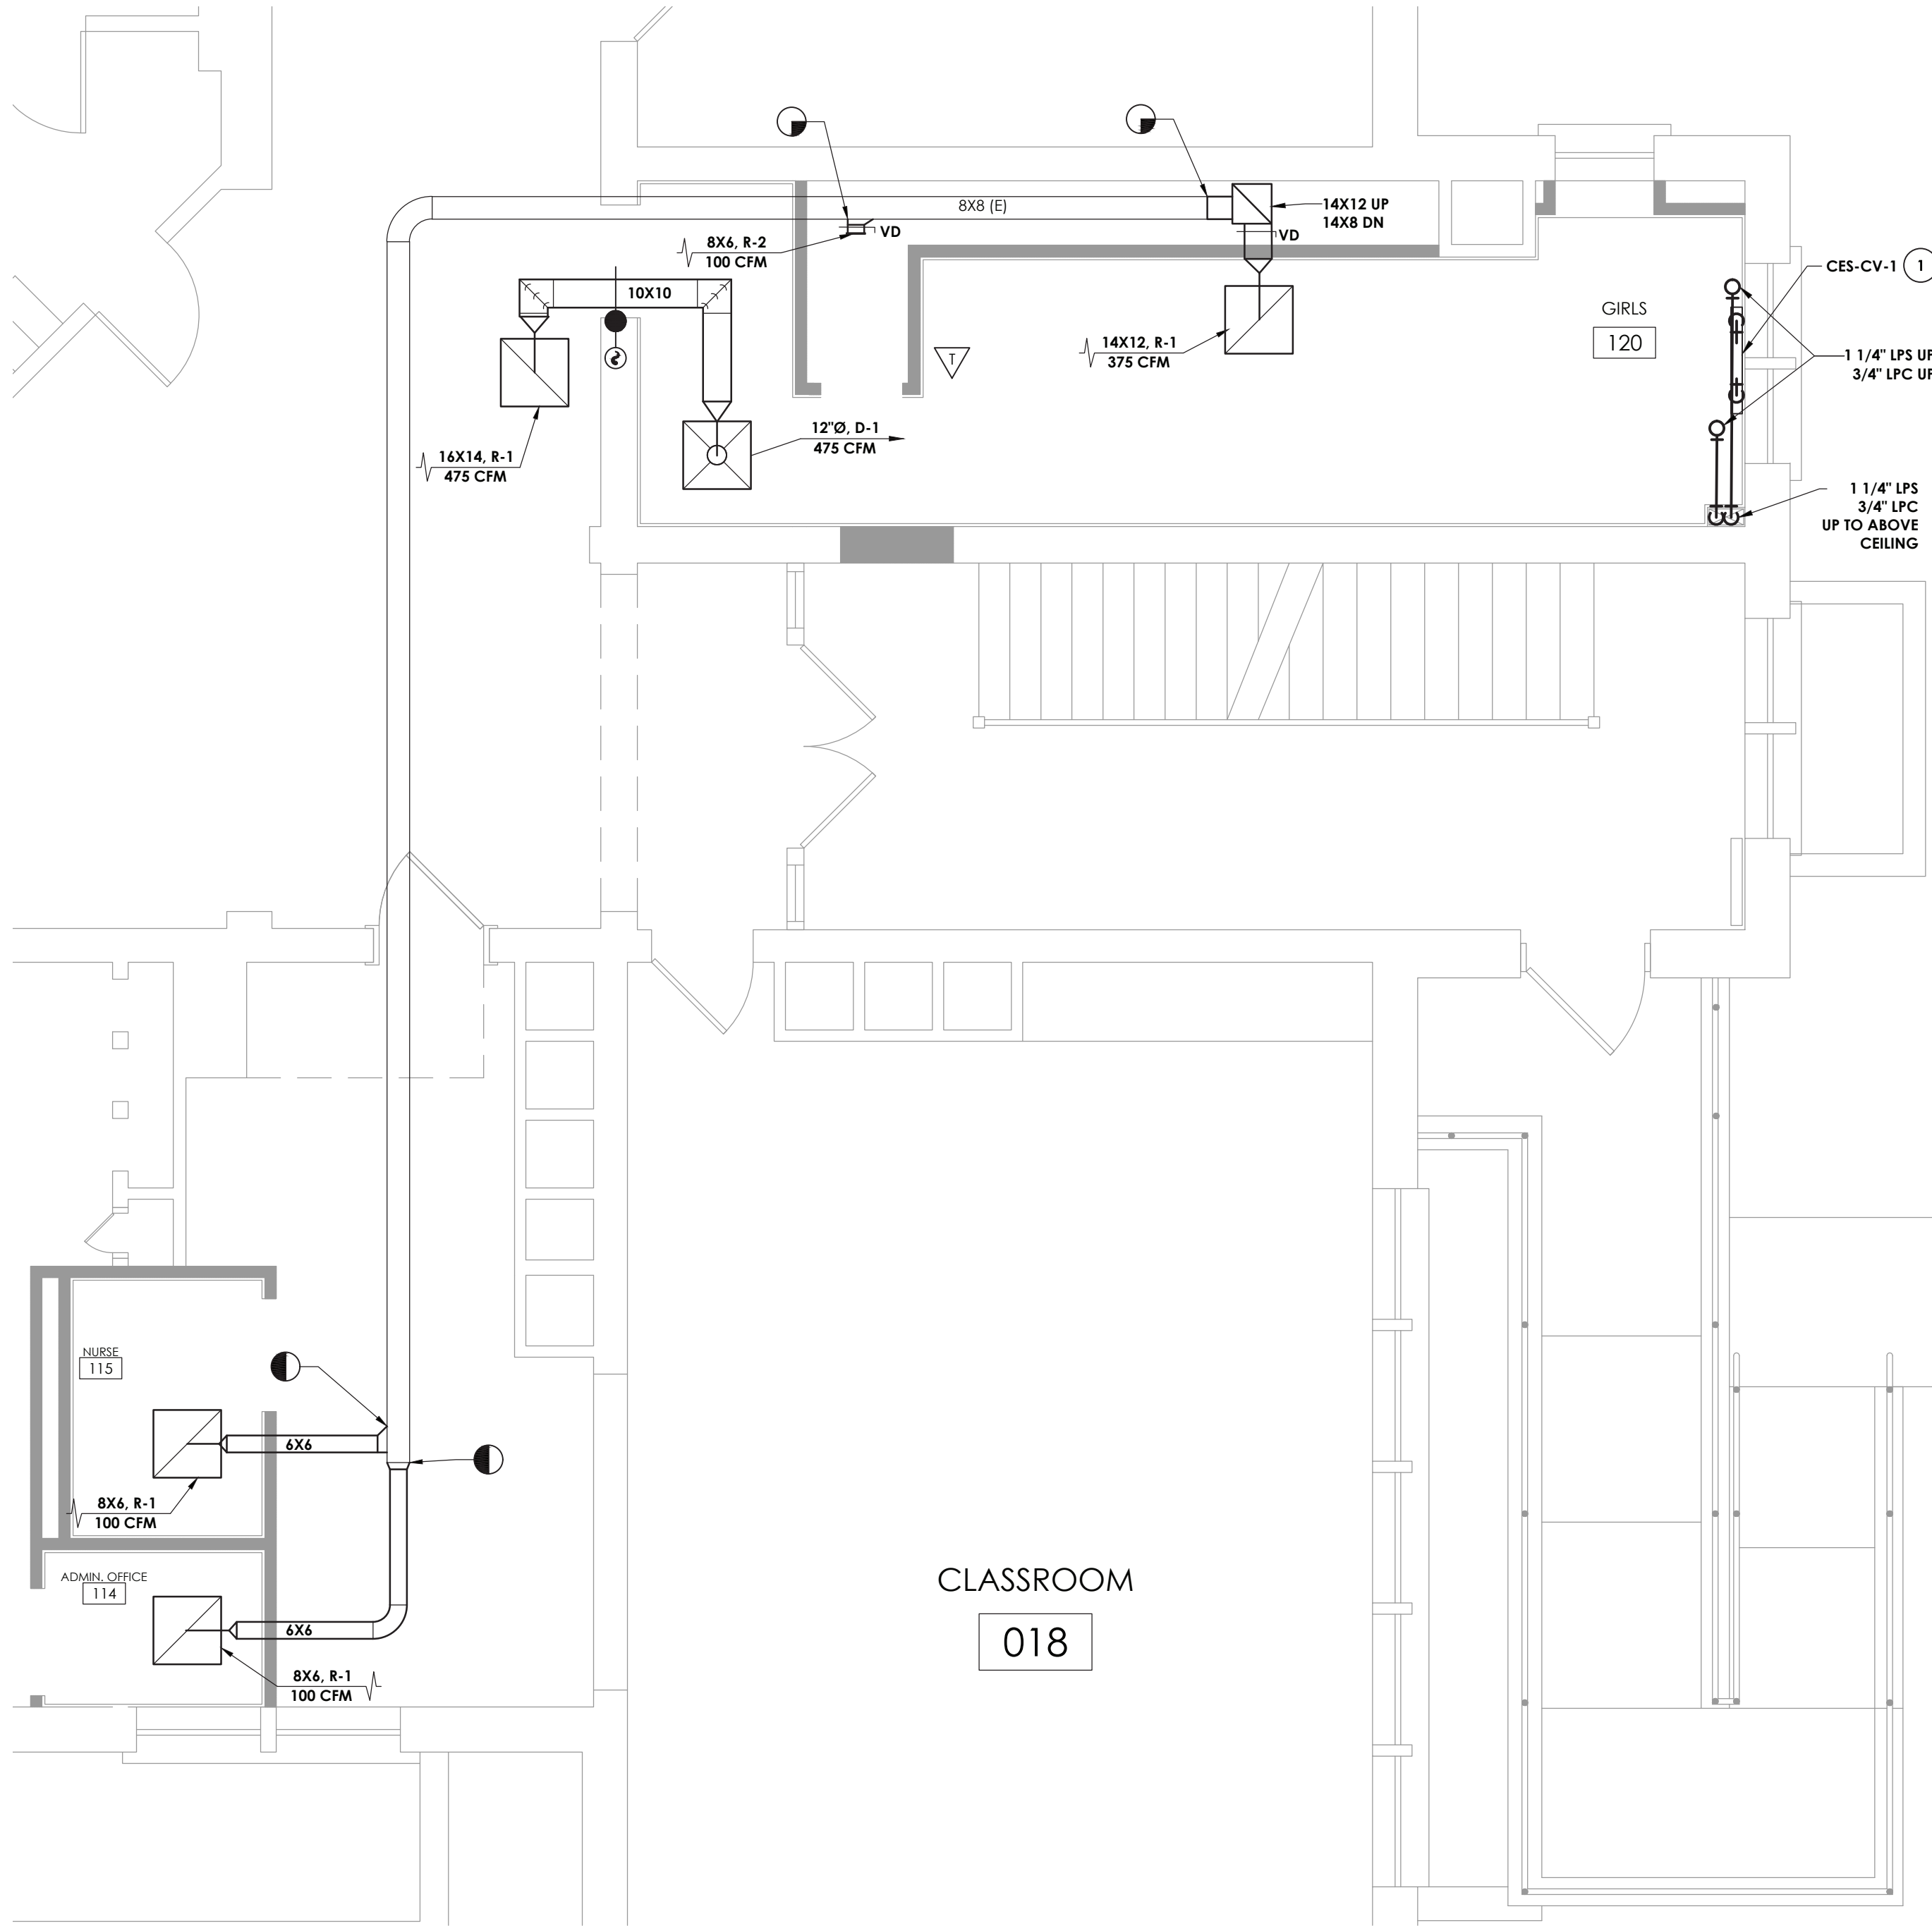

2 TOILET ROOM 120 NEW WORK PLAN
SCALE: 1/4" = 1'-0"

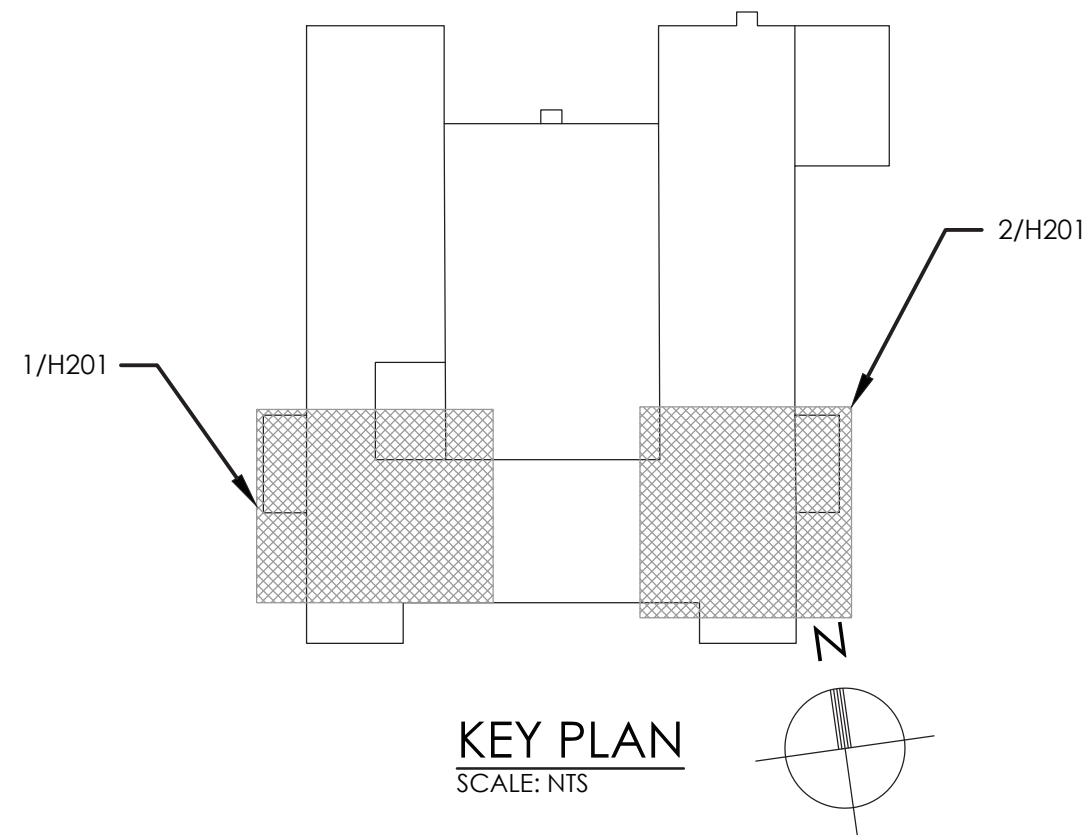

GENERAL NOTE:

- ALL CONTROLS WORK SHALL BE PERFORMED BY TECHNICAL BUILDING SERVICES, INC.
CONTACT: ED ROCKSTROH
(P): (518) 885-4444
(E): edrockstroh@tbscontrols.com

KEY NOTES:

- CONTRACTOR SHALL PROVIDE NEW WALL MOUNTED CONVECTORS INCLUDING, CONTROL VALVES, CONTROLS AND THERMOSTAT. SEE SCHEDULE.



ARCHITECTURE • ENGINEERING • PLANNING

50 FRONT STREET, SUITE 202
NEWBURGH, NEW YORK 12550
TEL (800) 274-9000

REVISIONS

NO. BY DATE

DESCRIPTION


POUGHKEEPSIE CITY SCHOOL DISTRICT
2020 CAPITAL IMPROVEMENT PROJECT
PHASE 1B: BUILDING IMPROVEMENTS

- POUGHKEEPSIE HIGH SCHOOL: SED# 13-15-00-01-0-007-018
- POUGHKEEPSIE MIDDLE SCHOOL: SED# 13-15-00-01-0-008-021
- POUGHKEEPSIE ELEMENTARY SCHOOL: SED# 13-15-00-01-0-009-014
- KREGER ELEMENTARY SCHOOL: SED# 13-15-00-01-0-006-014
- MORSE ELEMENTARY SCHOOL: SED# 13-15-00-01-0-002-014
- WARRING ELEMENTARY SCHOOL: SED# 13-15-00-01-0-005-013
- CLINTON ELEMENTARY SCHOOL: SED# 13-15-00-01-0-004-014
- COLUMBUS ELEMENTARY SCHOOL: SED# 13-15-00-01-0-001-014


DATE	DRAWN	CHECKED
10/20/2021	BEF	AJS
SCALE	1/4" = 1'-0"	
SHEET TITLE	CLINTON ELEMENTARY SCHOOL FIRST FLOOR TOILET ROOMS NEW WORK PLANS	

PROJECT NUMBER
14078.09


CES
H201
DRAWING NUMBER

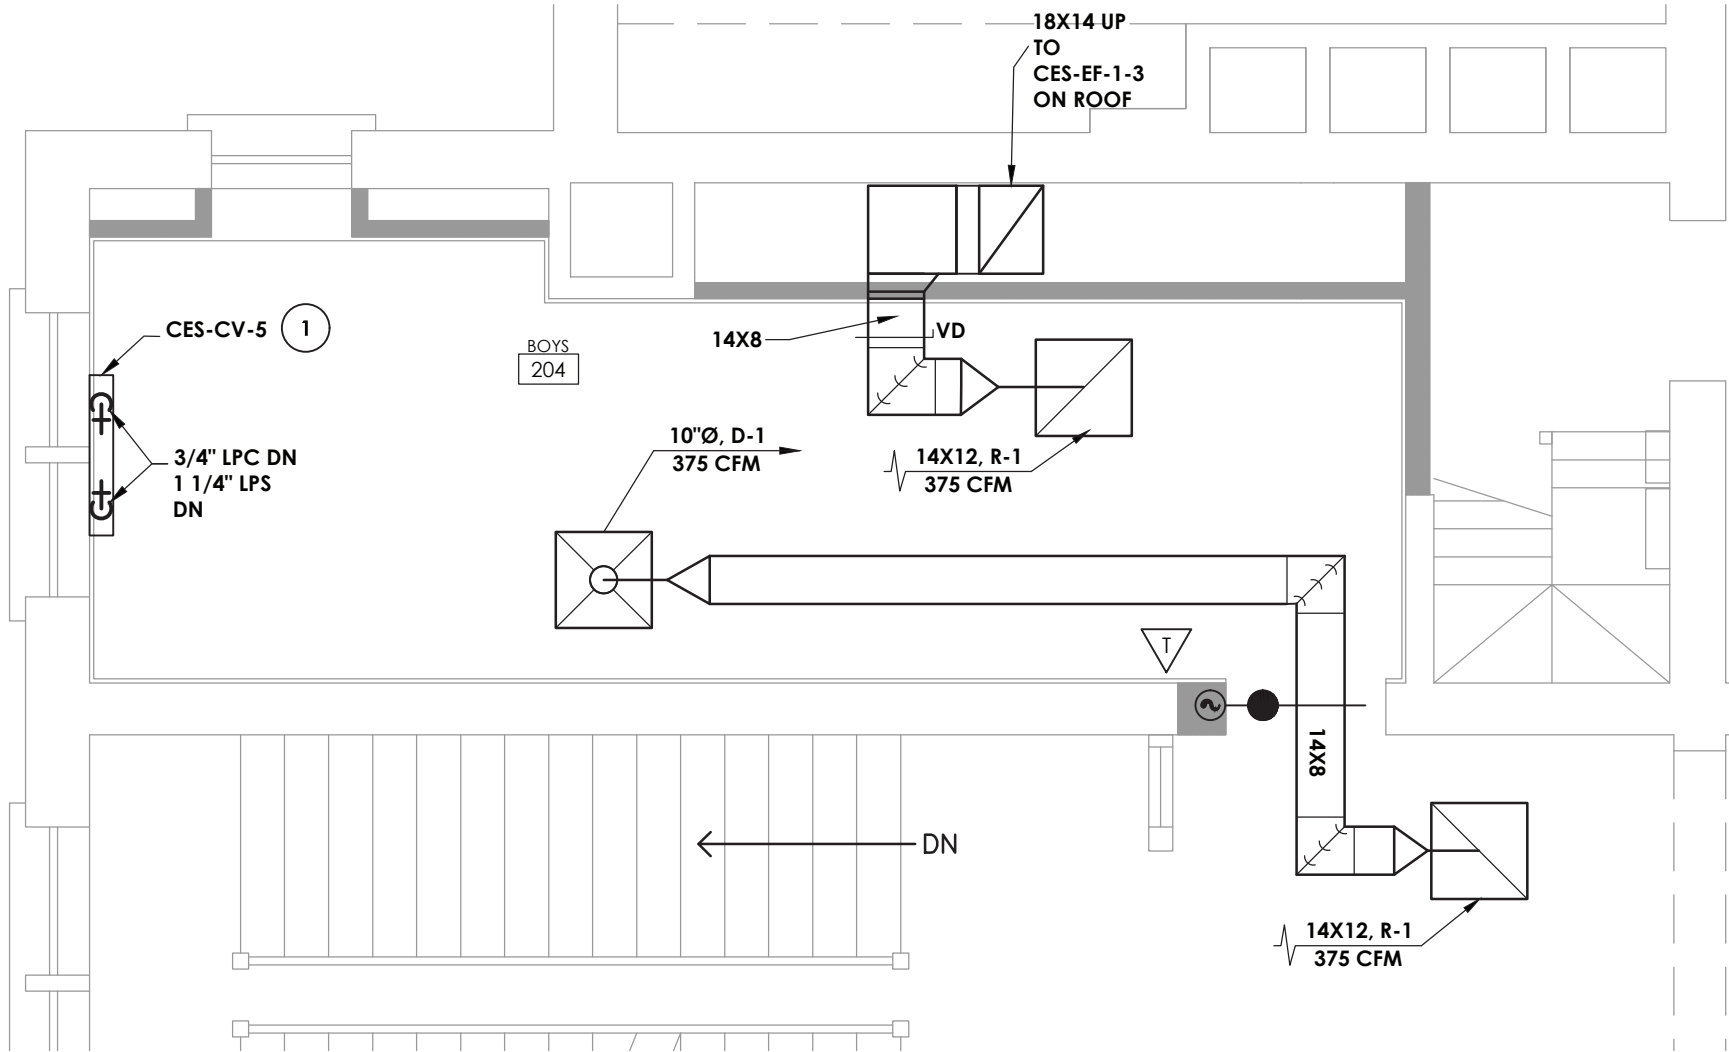

1
H202 TOILET ROOM 204 NEW WORK PLANS
SCALE: 1/4" = 1'-0"

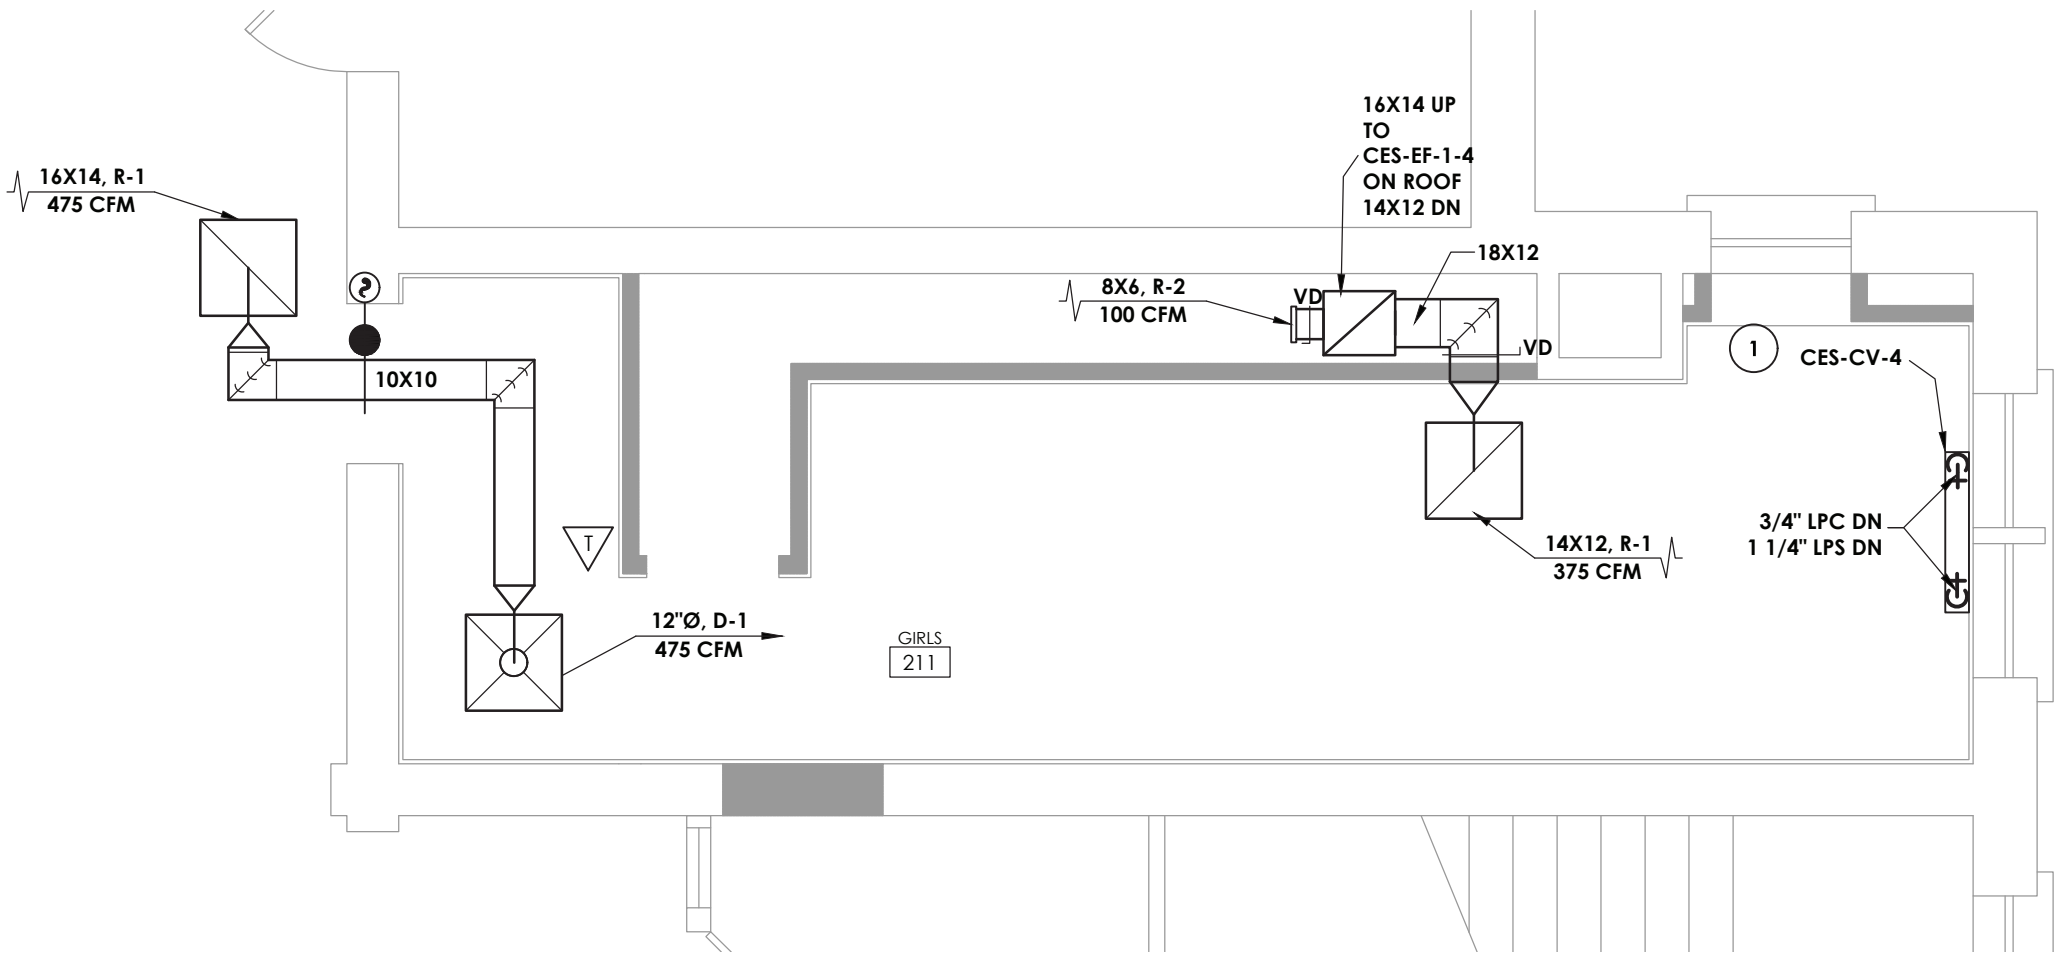

2
H202 TOILET ROOM 211 NEW WORK PLANS
SCALE: 1/4" = 1'-0"

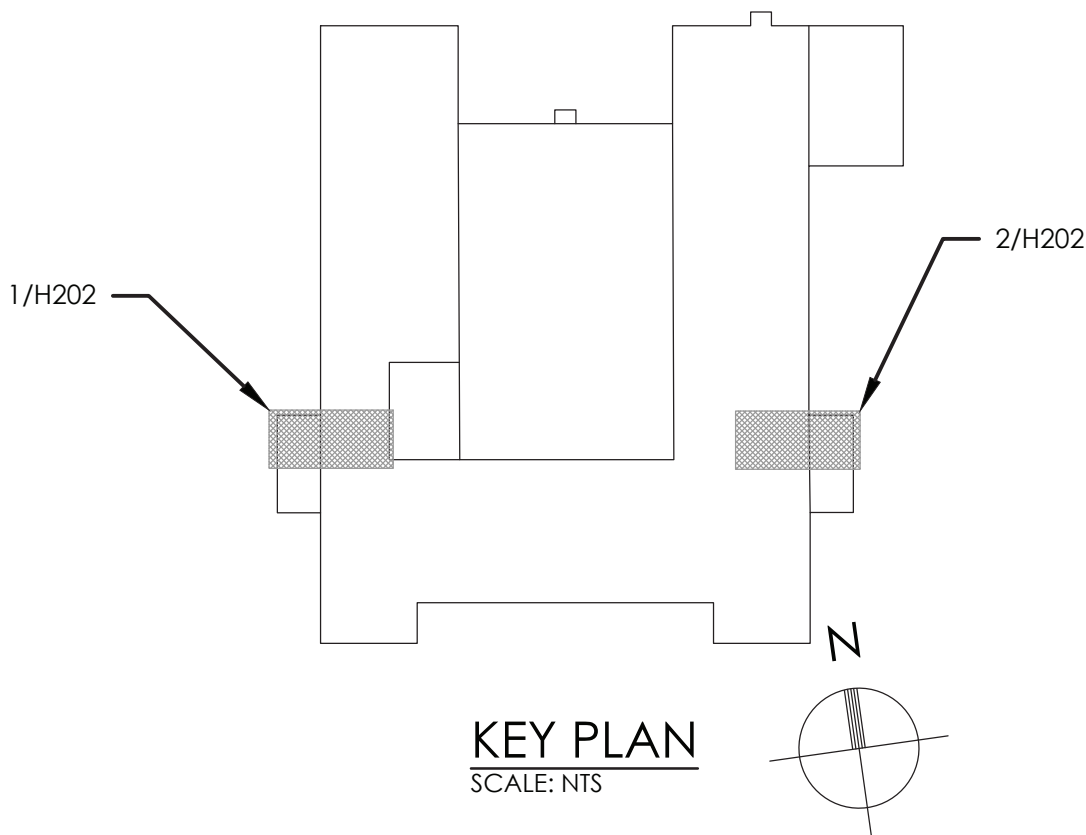

GENERAL NOTE:

- ALL CONTROLS WORK SHALL BE PERFORMED BY TECHNICAL BUILDING SERVICES, INC.
CONTACT: ED ROCKSTROH
(P): (518) 885-4444
(E): edrockstroh@tbscontrols.com

KEY NOTES:

- CONTRACTOR SHALL PROVIDE NEW WALL MOUNTED CONVECTORS INCLUDING, CONTROL VALVES, CONTROLS AND THERMOSTAT. SEE SCHEDULE.



CPLteam.com
ARCHITECTURE • ENGINEERING • PLANNING

50 FRONT STREET, SUITE 202
NEWBURGH, NEW YORK 12550
TEL (800) 274-9000

REVISIONS		DESCRIPTION	
NO.	DATE	BY	DESCRIPTION



POUGHKEEPSIE CITY SCHOOL DISTRICT
2020 CAPITAL IMPROVEMENT PROJECT
PHASE 1B: BUILDING IMPROVEMENTS

☐ POUGHKEEPSIE HIGH SCHOOL: SED# 13-15-00-01-0-007-018

☐ POUGHKEEPSIE MIDDLE SCHOOL: SED# 13-15-00-01-0-008-021

☐ POUGHKEEPSIE ELEMENTARY SCHOOL: SED# 13-15-00-01-0-009-014

☐ KREGER ELEMENTARY SCHOOL: SED# 13-15-00-01-0-004-014

☐ MORSE ELEMENTARY SCHOOL: SED# 13-15-00-01-0-002-014

☐ WARRING ELEMENTARY SCHOOL: SED# 13-15-00-01-0-005-013

☐ CLINTON ELEMENTARY SCHOOL: SED# 13-15-00-01-0-001-014


☐ COLUMBUS ELEMENTARY SCHOOL: SED# 13-15-00-01-0-001-014

DATE	DRAWN	CHECKED
10/20/2021	BEF	AJS
SCALE: 1/4" = 1'-0"		
SHEET TITLE		
CLINTON ELEMENTARY SCHOOL SECOND FLOOR TOILET ROOMS NEW WORK PLANS		


PROJECT NUMBER
14078.09

CES
H202

DRAWING NUMBER

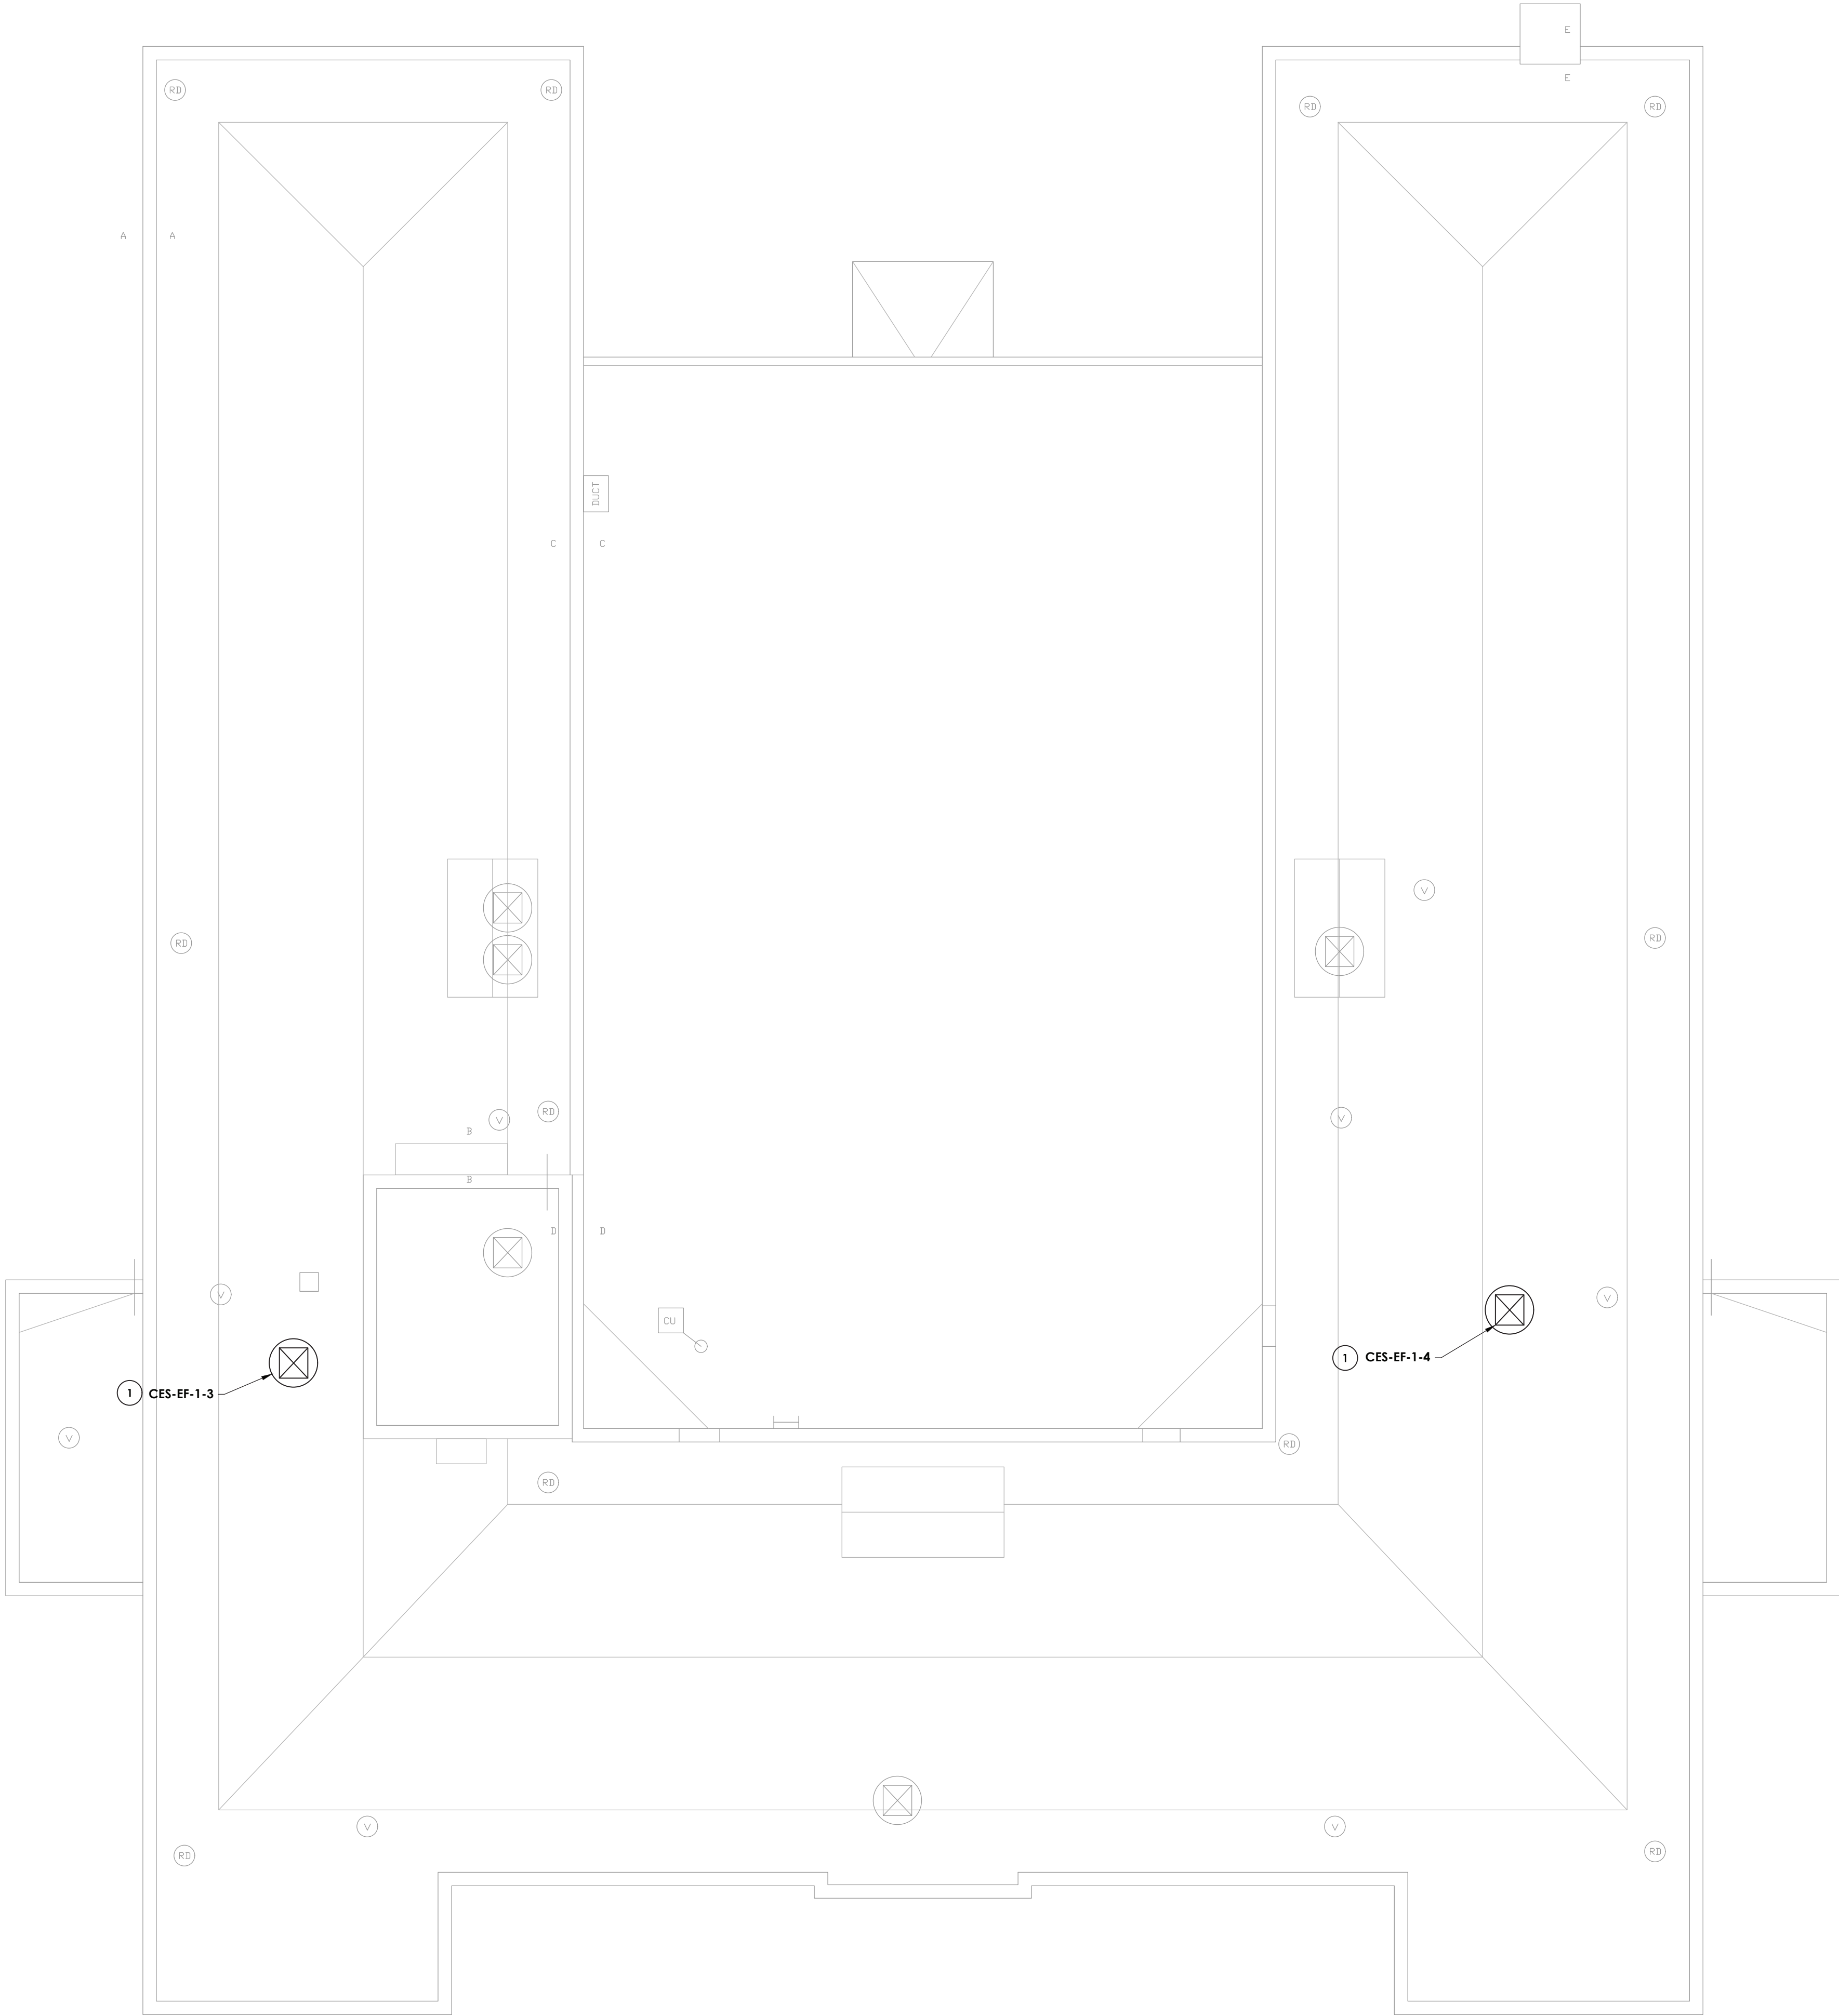

1 ROOF NEW PLAN
H203 SCALE: 1/8" = 1'-0"

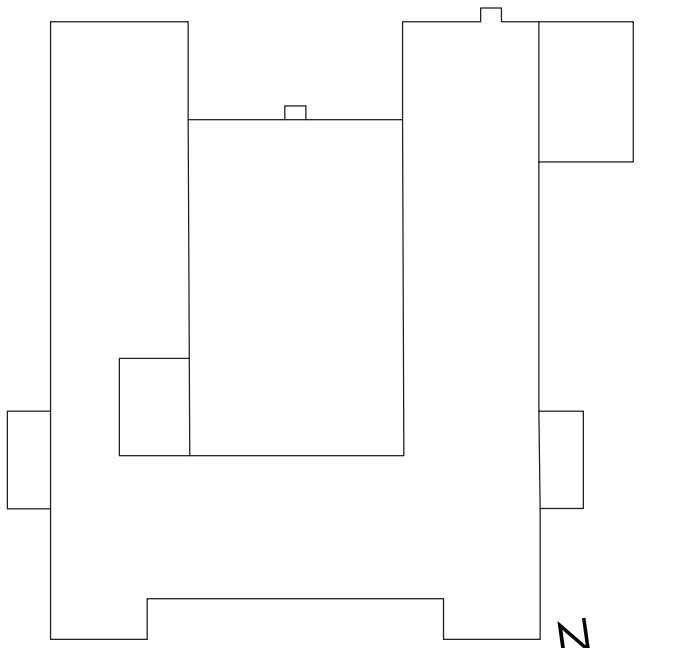

KEY PLAN
SCALE: NTS

GENERAL NOTE:

1. ALL CONTROLS WORK SHALL BE PERFORMED BY TECHNICAL BUILDING SERVICES, INC.
CONTACT: ED ROCKSTROH
(P): (518) 885-4444
(E): edrockstroh@tbscontrols.com

KEY NOTES:

- 1 PROVIDE NEW EXHAUST FAN IN LOCATION OF REMOVED FAN. M.C. TO PROVIDE AND MARK OUT LOCATION OF NEW CURB. COORDINATE CUTTING AND PATCHING WITH G.C.



CPLteam.com
ARCHITECTURE • ENGINEERING • PLANNING

50 FRONT STREET, SUITE 202
NEWBURGH, NEW YORK 12550
TEL (800) 274-9000

REVISIONS		DESCRIPTION	
NO.	DATE	BY	DESCRIPTION



POUGHKEEPSIE CITY SCHOOL DISTRICT
2020 CAPITAL IMPROVEMENT PROJECT
PHASE 1B: BUILDING IMPROVEMENTS

- ☐ POUGHKEEPSIE HIGH SCHOOL: SED# 13-15-00-01-0-007-018
- ☐ POUGHKEEPSIE MIDDLE SCHOOL: SED# 13-15-00-01-0-004-021
- ☐ POUGHKEEPSIE ELEMENTARY SCHOOL: SED# 13-15-00-01-0-004-014
- ☐ KREGER ELEMENTARY SCHOOL: SED# 13-15-00-01-0-004-014
- ☐ MORSE ELEMENTARY SCHOOL: SED# 13-15-00-01-0-002-014
- ☐ WARRING ELEMENTARY SCHOOL: SED# 13-15-00-01-0-005-013
- ☐ CLINTON ELEMENTARY SCHOOL: SED# 13-15-00-01-0-001-014
- ☐ COLUMBIUS ELEMENTARY SCHOOL: SED# 13-15-00-01-0-001-014

DATE	DRAWN	CHECKED
10/20/2021	BEF	AJS
SCALE: 1/8" = 1'-0"		
SHEET TITLE		
CLINTON ELEMENTARY SCHOOL ROOF NEW PLANS		

PROJECT NUMBER
14078.09

CES
H203

DRAWING NUMBER