



LOW VOLTAGE CEILING SENSOR

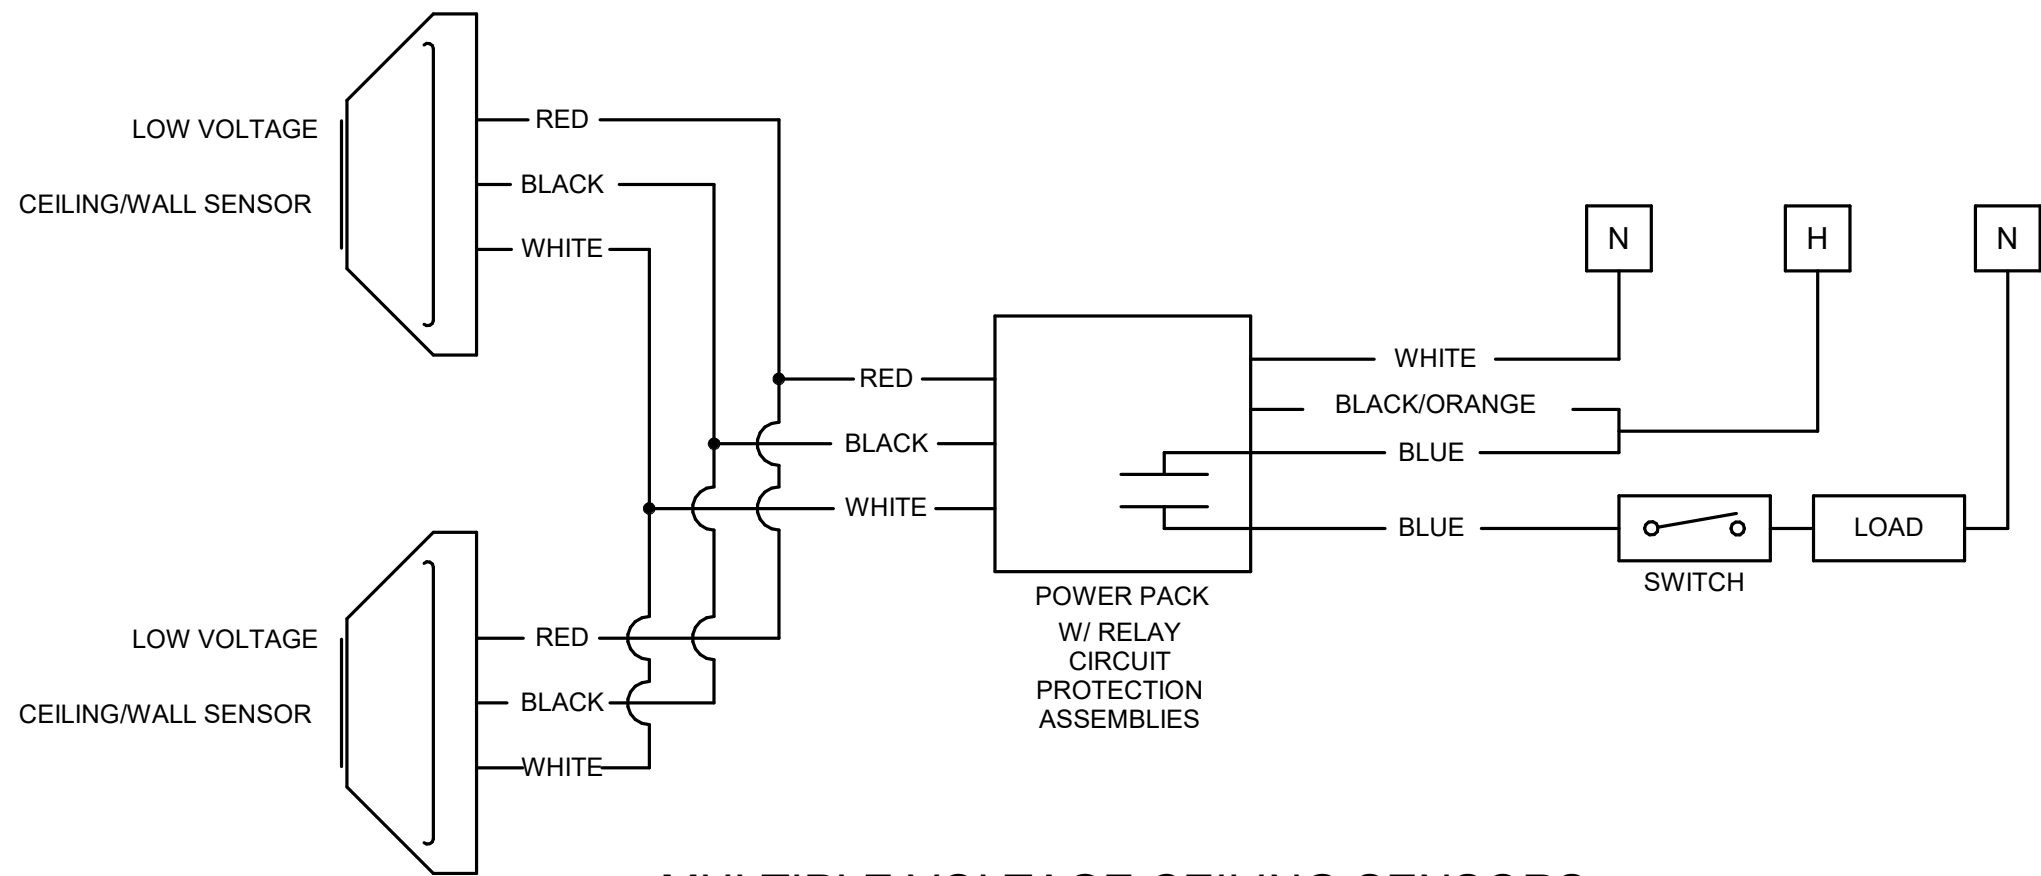

MULTIPLE VOLTAGE CEILING SENSORS

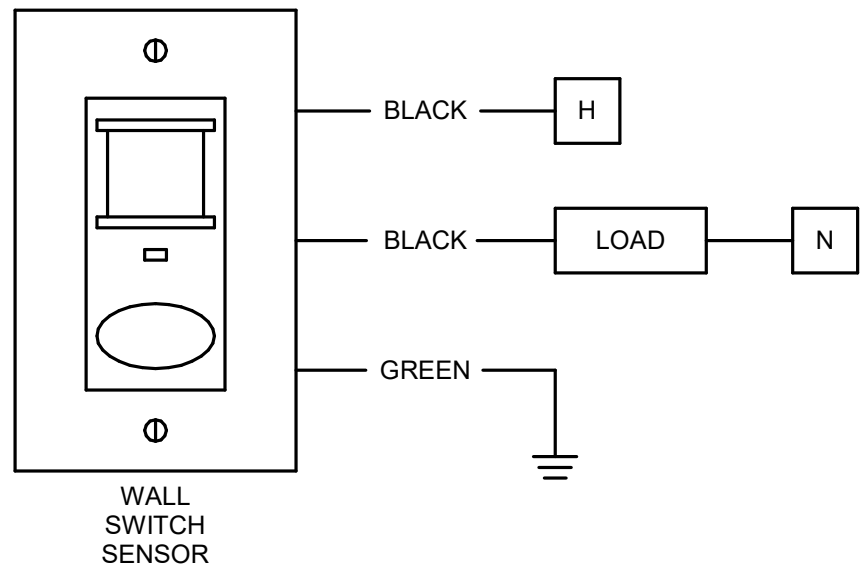

WALL MOUNTED SWITCH SENSOR

1 LIGHTING CONTROL DIAGRAMS
NOT TO SCALE

GENERAL LIGHTING CONTROL SENSOR NOTES:

1. THESE DETAILS ARE FOR DIAGRAMMATIC PURPOSES ONLY AND SHALL NOT BE USED AS A BILL OF MATERIAL. THE CONTRACTOR SHALL COORDINATE EXACT EQUIPMENT QUANTITIES AND REQUIREMENTS WITH LIGHTING CONTROL SYSTEMS MANUFACTURER.
2. PROVIDE ALL OCCUPANCY SENSORS, POWER PACKS, MOUNTING HARDWARE, WIRING, ETC. REQUIRED FOR A COMPLETE AND OPERATIONAL LIGHTING CONTROL SYSTEM. INSTALLATION AND WIRING SHALL BE PER MANUFACTURER'S REQUIREMENTS.
3. COMMISSION THE SETTINGS OF THE SENSORS: DUAL TECHNOLOGY SHALL BE SET TO "TURN ON" WHEN BOTH TECHNOLOGIES SENSE MOTION AND MAINTAIN "ON" WITH EITHER TECHNOLOGY. SET SENSOR TO MID-RANGE SENSITIVITY WITH A 15 MINUTE DELAY TO "TIME OFF".
4. MANUFACTURER'S REPRESENTATIVE SHALL RE-VISIT THE SITE AS REQUESTED TO PERFORM ADJUSTMENTS TO SATISFY THE OWNER AND ENGINEERING SERVICES.

REVISIONS	
No.	Description

CONSULTANT

KC I TECHNOLOGIES

ENGINEERS
PLANNERS
SCIENTISTS
CONSTRUCTION MANAGERS

500 LOUISE DRIVE SUITE 300
HARTFORD, CT 06105
PHONE: 717-691-1340
www.kci.com

SAA architects

Client centered • Smart solutions

600 North Hanley Street, Suite 150
York, PA 17404
T - 717 843.3200 F - 717 698.0205
www.SAAarchitects.com

DRAWING TITLE

© 2005 SAAarchitects, Inc.

ELECTRICAL DETAILS

POUGHKEEPSIE NY STORAGE

DIAMOND POINT DEVELOPMENT

1899 SOUTH ROAD POUGHKEEPSIE, NEW YORK 12601
DUTCHESS COUNTY

STATE OF NEW YORK
JULY STARRED
REGISTERED PROFESSIONAL ENGINEER
No. 109501

FILE No: 22-082

DATE: 7/1/2022

SCALE: AS NOTED

DRAWN BY: AMB

DRAWING No: E-503

WARNING: It is a violation of the NYS Education Law Article 145 for any person to alter this document in anyway, unless they are acting under the direction of a Professional Engineer

ISSUED FOR PERMIT