


PLUMBING FIXTURE SCHEDULE							
SYMBOL	MANUFACTURER	MODEL	DESCRIPTION	CONNECTIONS			
				CW	HW	WASTE	VENT
WC-1	AMERICAN STANDARD	3351.101	"4\"AWALL\" ELONGATED BOWL, TOP SPUD, LOW CONSUMPTION (1.6 GAL. PER FLUSH) VITREOUS CHINA TOILET, SIPHON JET ACTION, WALL MOUNTED BOWL W/ BACK OUTLET. PROVIDE: BEMIS MODEL 195CST OPEN FRONT SEAT, PROVIDE WITH SLOAN MODEL ROYAL 111-1.28-YO DIAPHRAGM FLUSH VALVE AND CONCEALED WALL CARRIER. SEE DRAWING KEYNOTES FOR WATER CLOSET MOUNTING HEIGHT.	1"	-	4"	2"
UR-1	AMERICAN STANDARD	6590.001	"WASHBROOK\" LOW-CONSUMPTION (0.5 GALLONS PER FLUSH) URINAL, WASHOUT FLUSH ACTION, 3/4\" TOP INLET SPUD, 2\" OUTLET, PROVIDE WITH CONCEALED WALL CARRIER AND SLOAN MODEL ROYAL 186-0.5-SG FLUSH VALVE.	3/4"	-	2"	2"
L-1	AMERICAN STANDARD	0355.012	"LUCERNE\" WALL HUNG VITREOUS CHINA LAVATORY, 20\"x18\" WITH FRONT OVERFLOW, PROVIDE WITH CHROME FINISH AMERICAN STANDARD MODEL \"MONTERREY\" 6114.116.002, 1.5 GPM WITH FLOW RESTRICTOR AND GRID DRAIN, PROVIDE WITH OFFSET DRAIN, INSULATION KIT, AND CONCEALED ARM CARRIER. PROVIDE CHROME FINISH ASSE 1070 LISTED UNDER-SINK THERMOSTATIC MIXING VALVE SET AT 105\" F.	1/2"	1/2"	2"	1-1/2"
L-2	AMERICAN STANDARD	0355.012	"LUCERNE\" WALL HUNG VITREOUS CHINA LAVATORY, 20\"x18\" WITH FRONT OVERFLOW, PROVIDE WITH CHROME FINISH AMERICAN STANDARD MODEL \"MONTERREY\" 6114.116.002, 1.5 GPM WITH FLOW RESTRICTOR AND GRID DRAIN, MOUNT TO BE ADA COMPLIANT. PROVIDE WITH OFFSET DRAIN, INSULATION KIT, AND CONCEALED ARM CARRIER. PROVIDE CHROME FINISH ASSE 1070 LISTED UNDER-SINK THERMOSTATIC MIXING VALVE SET AT 105\" F.	1/2"	1/2"	2"	1-1/2"
S-1	ELKAY	LRAD1918360	#18 GAUGE, 19\"x18\" STAINLESS STEEL SELF RIM SINGLE BOWL SINK, SATIN FINISH, 6\" DEEP ADA COMPLIANT COMPARTMENT, UNIT DRILLED FOR FAUCET AND DRAIN, PROVIDE COMPLETE WITH MOEN \"CHATEAU\" MODEL 6742S ADA COMPLIANT, ONE HANDLE FAUCET WITH AERATOR AND 1.5 GPM FLOW RESTRICTOR, PROVIDE SINK WITH STRAINERS FOR DRAINS. FIELD VERIFY CABINET SIZE TO DETERMINE SINK MODEL.	1/2"	1/2"	2"	1-1/2"
EWG-1	ELKAY	LZSG8WSSK	SINGLE ELECTRIC WATER COOLER WITH BOTTLE FILLER, FILTER, 8.0 GPH AT 50 DEG. F, WATER TEMP. 120/160, 6.0 F.L.A., 325 WATTS AND LIMITED 5 YEAR WARRANTY. ENTIRE INSTALLATION SHALL COMPLY WITH ALL CURRENT ADA REQUIREMENTS.	1/2"	-	2"	1-1/2"

SAN	SANITARY PIPING
V	SANITARY VENT PIPING
CW	COLD WATER PIPING
HW	HOT WATER PIPING
HWR	HOT WATER RETURN PIPING
NG	NATURAL GAS PIPING
WC	WATER CLOSET
UR	URINAL
L	LAVATORY
S	SINK
SS	SERVICE SINK
EW	ELECTRIC WATER COOLER
FCO	FLUSH WITH FLOOR CLEANOUT
WCO	FLUSH WITH WALL CLEANOUT
CO	CLEANOUT
FD	FLOOR DRAIN
VTR	VENT THRU ROOF
BFP	BACKFLOW PREVENTER
AFF	ABOVE FINISHED FLOOR
AD	ACCESS DOOR

ALL EQUIPMENT, MATERIALS AND INSTALLATION PRACTICES TO MEET THE REQUIREMENTS AND SPECIFICATIONS DETAILED IN THE MOST RECENT USPS MPF SPECIFICATION.

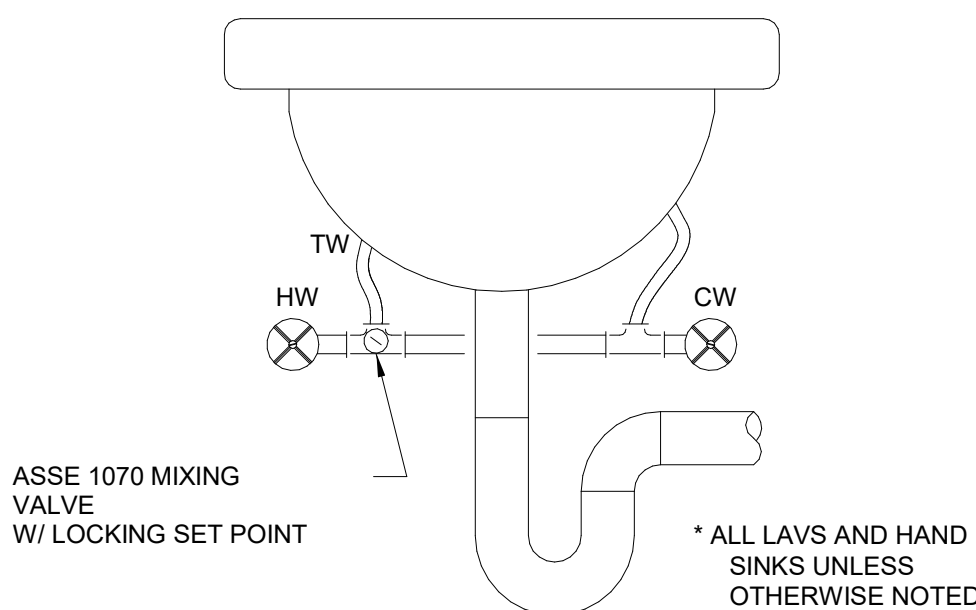

C5 SINK TEMPERED WATER VALVE DETAIL
12" = 1'-0"