




- ### General Notes
- VERIFY ALL PIPING LOCATIONS, SIZES, AND ARRANGEMENTS IN FIELD PRIOR TO BID. NOTIFY ARCHITECT IN WRITING OF ANY DISCREPANCIES.
 - VERIFY IN FIELD INVERT AND DIRECTION OF FLOW IN EXISTING SOIL PIPE WHERE NEW SOIL PIPE IS TO BE CONNECTED TO EXISTING SOIL PIPE.
 - LEGALLY DISPOSE OF ALL DEMOLITION DEBRIS.
 - INCLUDE TRENCHING, CUTTING AND PATCHING OF FLOORS, WALLS AND CEILINGS, INCLUDING CEILING TILE REMOVAL AND REPLACEMENT, WHEN REQUIRED FOR PLUMBING WORK. PATCH ABANDONED OPENINGS AND DISTURBED FINISHES TO MATCH EXISTING. TAKE PRECAUTIONS TO PROTECT STRUCTURAL INTEGRITY OF FLOOR OR WALLS WHEN TRENCHING OR CUTTING.
 - MATERIALS FOR PLUMBING INSTALLATION SHALL BE NEW, UNLESS SPECIFICALLY NOTED OTHERWISE.
 - PROVIDE THROUGH PENETRATION FIRESTOPPING FOR FIRE RATED WALLS AND FLOORS. PENETRATIONS THROUGH EXISTING WALLS AND FLOORS ARE CONSIDERED TWO-HOUR PARTITIONS UNLESS SPECIFICALLY NOTED OTHERWISE. REFER TO "A" SERIES OR CODE COMPLIANCE DRAWINGS FOR LOCATION OF FIRE RATED WALLS AND FLOORS.

- ### Plumbing Notes
- REMOVE KITCHEN EQUIPMENT AND STORE FOR REINSTALLATION AFTER GREASE INTERCEPTOR IS REPLACED. CLEAN KITCHEN EQUIPMENT BEFORE REINSTALLATION. RECONNECT KITCHEN EQUIPMENT TO EXISTING ROUGH-INS.
 - FLOW CONTROL FITTING SUPPLIED BY GREASE INTERCEPTOR MANUFACTURER.
 - REFER TO DETAILS 2/ AP130 AND 3/ AP130 FOR ADDITIONAL INFORMATION.

Grease Interceptor Schedule														
DWG LABEL	LOCATION	DESIGN MAKE AND MODEL	GREASE RETENTION CAPACITY (POUNDS)	PDI RATED FLOW RATE (GPM)	INSTALLATION	INLET / OUTLET SIZE (NPS)	CENTERLINE OF INLET / OUTLET TO BOTTOM (INCHES)	CENTERLINE OF INLET / OUTLET TO TOP (INCHES)	EXTENSION HEIGHT (INCHES)	LENGTH (INCHES)	WIDTH (INCHES)	HEIGHT (INCHES)	VENT SIZE (NPS)	NOTES
GH-A-1	KITCHEN E-16	JR SMITH 8050	100	50	BURIED	3	17-1/2	6-3/4	FIELD VERIFY	35-1/2	20-3/4	24-1/4	2	1, 2
NOTES:														
1. PROVIDE EXTERNAL FLOW CONTROL FITTING SUPPLIED BY SAME MANUFACTURER AS GREASE INTERCEPTOR.														
2. SET UNIT COVER/EXTENSION FLUSH WITH FINISHED FLOOR.														

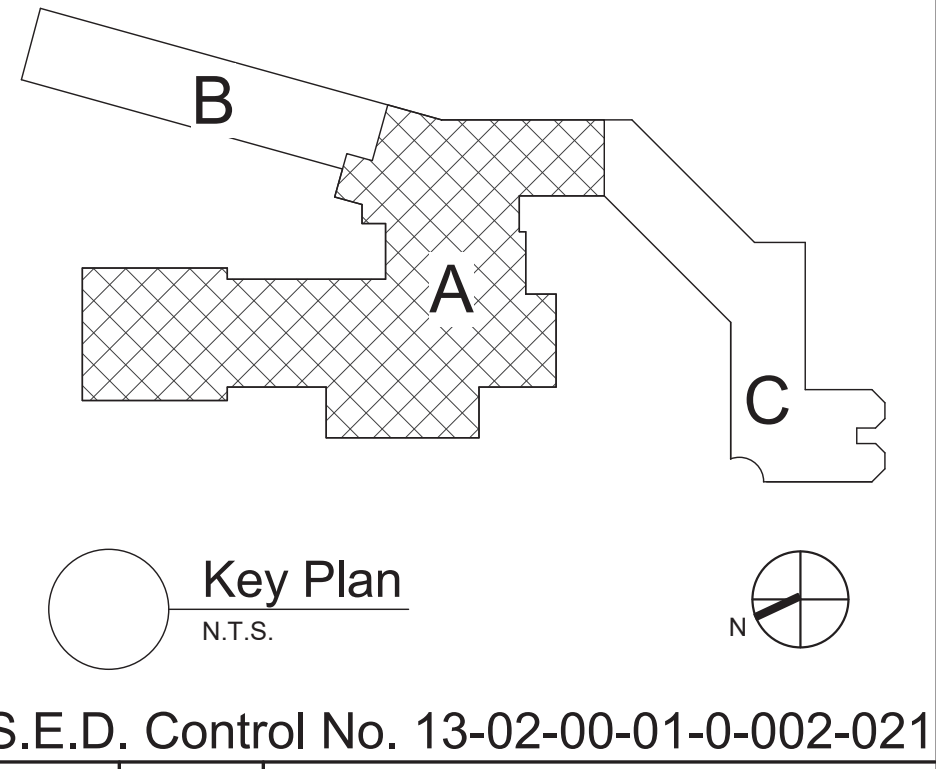

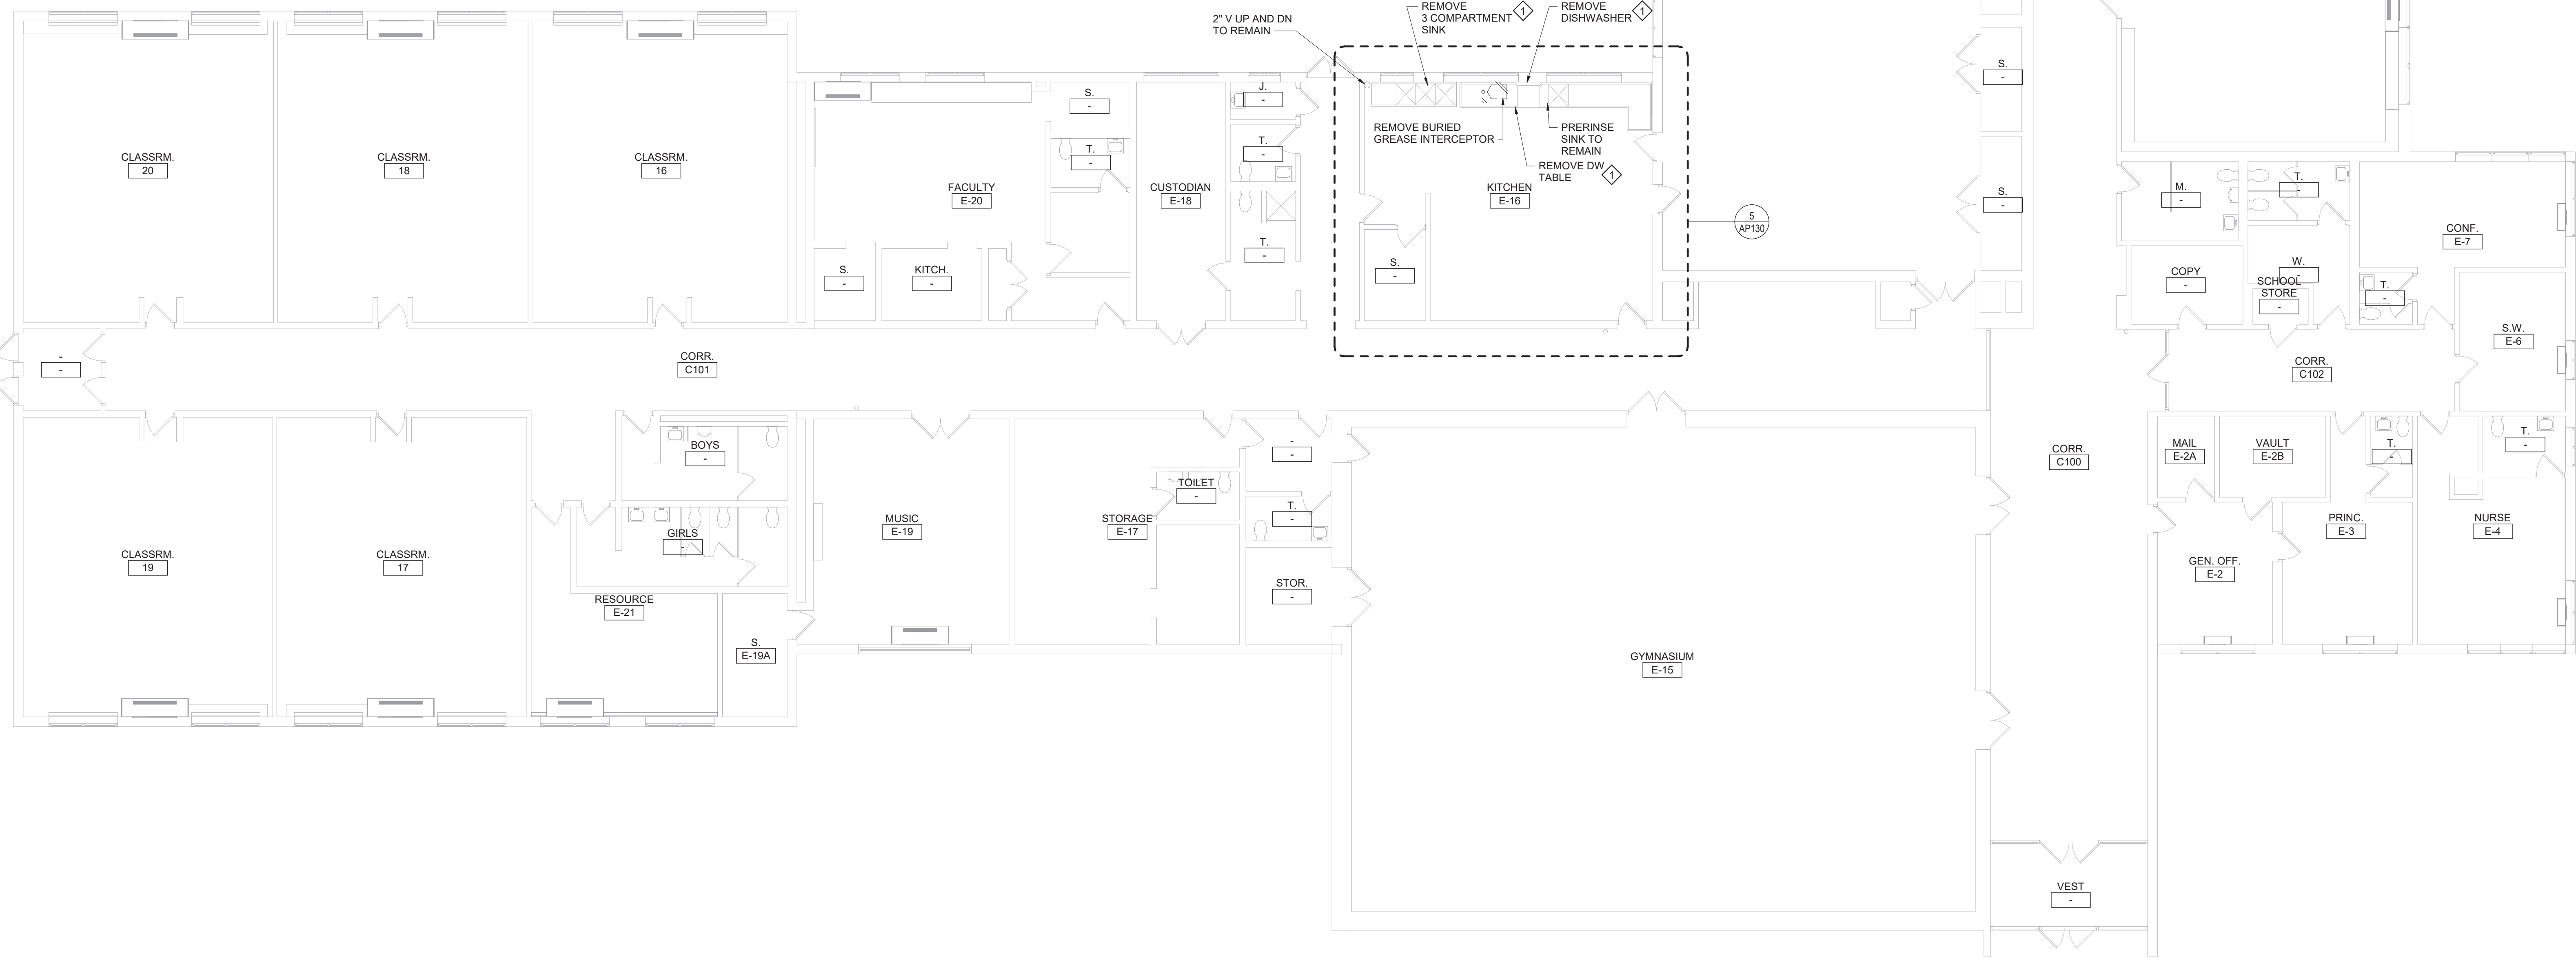

complex world | CLEAR SOLUTIONS

Tetra Tech Engineers, Architects & Landscape Architects, P.C.

TETRA TECH
ARCHITECTS & ENGINEERS

Beacon City School District
Beacon, New York

Reconstruction to:
JV Forrestal Elementary School

First Floor Plan - Area A, Details, and Schedule

Drawn By: GPD/ sef	Date: 10/28/2022	Drawing Number:
Project No.: 279180-22004		AP130

1 First Floor Plan - Area A
1/8" = 1'-0"