

2022 CAPITAL IMPROVEMENT PROJECT - PHASE 1



Expiration Date: 05-31-2025

	DATE	DESCRIPTION

Drawn By:	BJK
Checked By:	BJK
Proj. #:	62-08-03-04-0-010-01
CSArch Proj. #:	197-2201.0
Issued for Bid:	8/18/2

Sheet Title

AREA E SECOND
FLOOR
LIGHTING
DEMOLITION
PLAN

Sheet No. HES
ED223

CONSTRUCTION DOCUMENTS


General Notes:

1. IN ALL AREAS WITH EXISTING CEILINGS TO REMAIN, ELECTRICAL CONNECTIONS ARE RESPONSIBLE TO REMOVE AND REINSTALL CEILING TILES AND GRID AS NECESSARY TO COMPLETE REMOVE AND INSTALLATION OF LIGHTING, WIRING, CONDUIT, JUNCTION BOXES, ETC.
2. IN AREAS WHERE EXISTING CEILINGS ARE TO REMAIN AND LIGHTING IS TO BE REPLACED, REPAIR OR REPLACE SCORING, DISCONNECT, REMOVE AND PROPERLY DISPOSE OF EXISTING LIGHT FIXTURES AND ASSOCIATED COMPONENTS INCLUDING HANGERS AND WIRING/CONDUIT. REMOVE WIRING BACK TO SWITCH, DISCONNECT, REMOVE AND PROPERLY DISPOSE OF EXISTING LIGHT SWITCHES AND COVER PLATES. MAINTAIN EXISTING BOX, CONDUIT AND CIRCUIT FOR RECONNECTION TO REPLACEMENT SWITCH.
3. WALL MOUNTED EMERGENCY LIGHTING IN CORRIDORS IS EXISTING TO REMAIN WHERE SHOWN ON THE PLANS.

ADD ALTERNATE NO. EC-04-001-ES

CEILINGS TO BE REPLACED IN CLASSROOM 301, 301A, 302, 311 & 312, PERFORM ASSOCIATED CEILING DEMOLITION AS DEFINED IN ELECTRICAL DEMOLITION NOTES

KEY PLAN

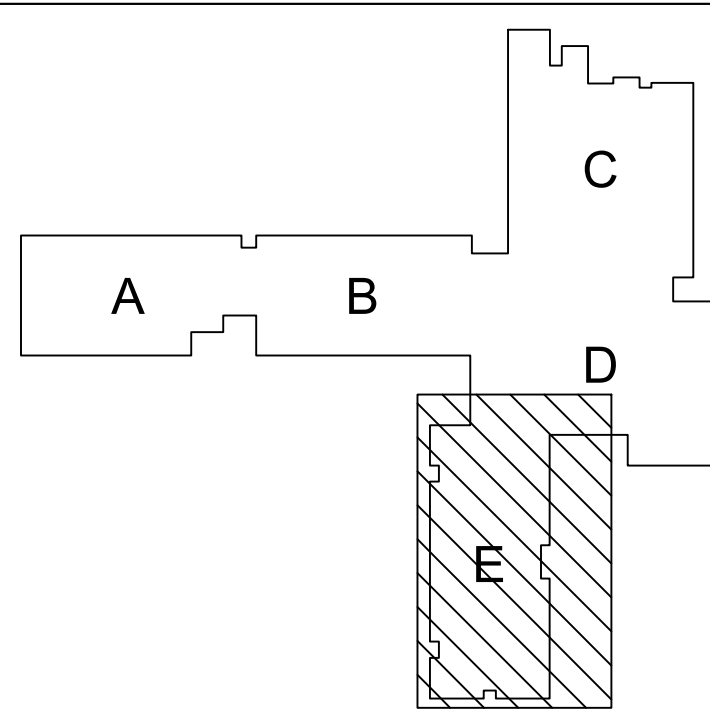


COPYRIGHT © ALL RIGHTS RESERVED

1
ED223

Area E Second Floor Lighting Demolition Plan

Scale: 1/8" = 1'-0"

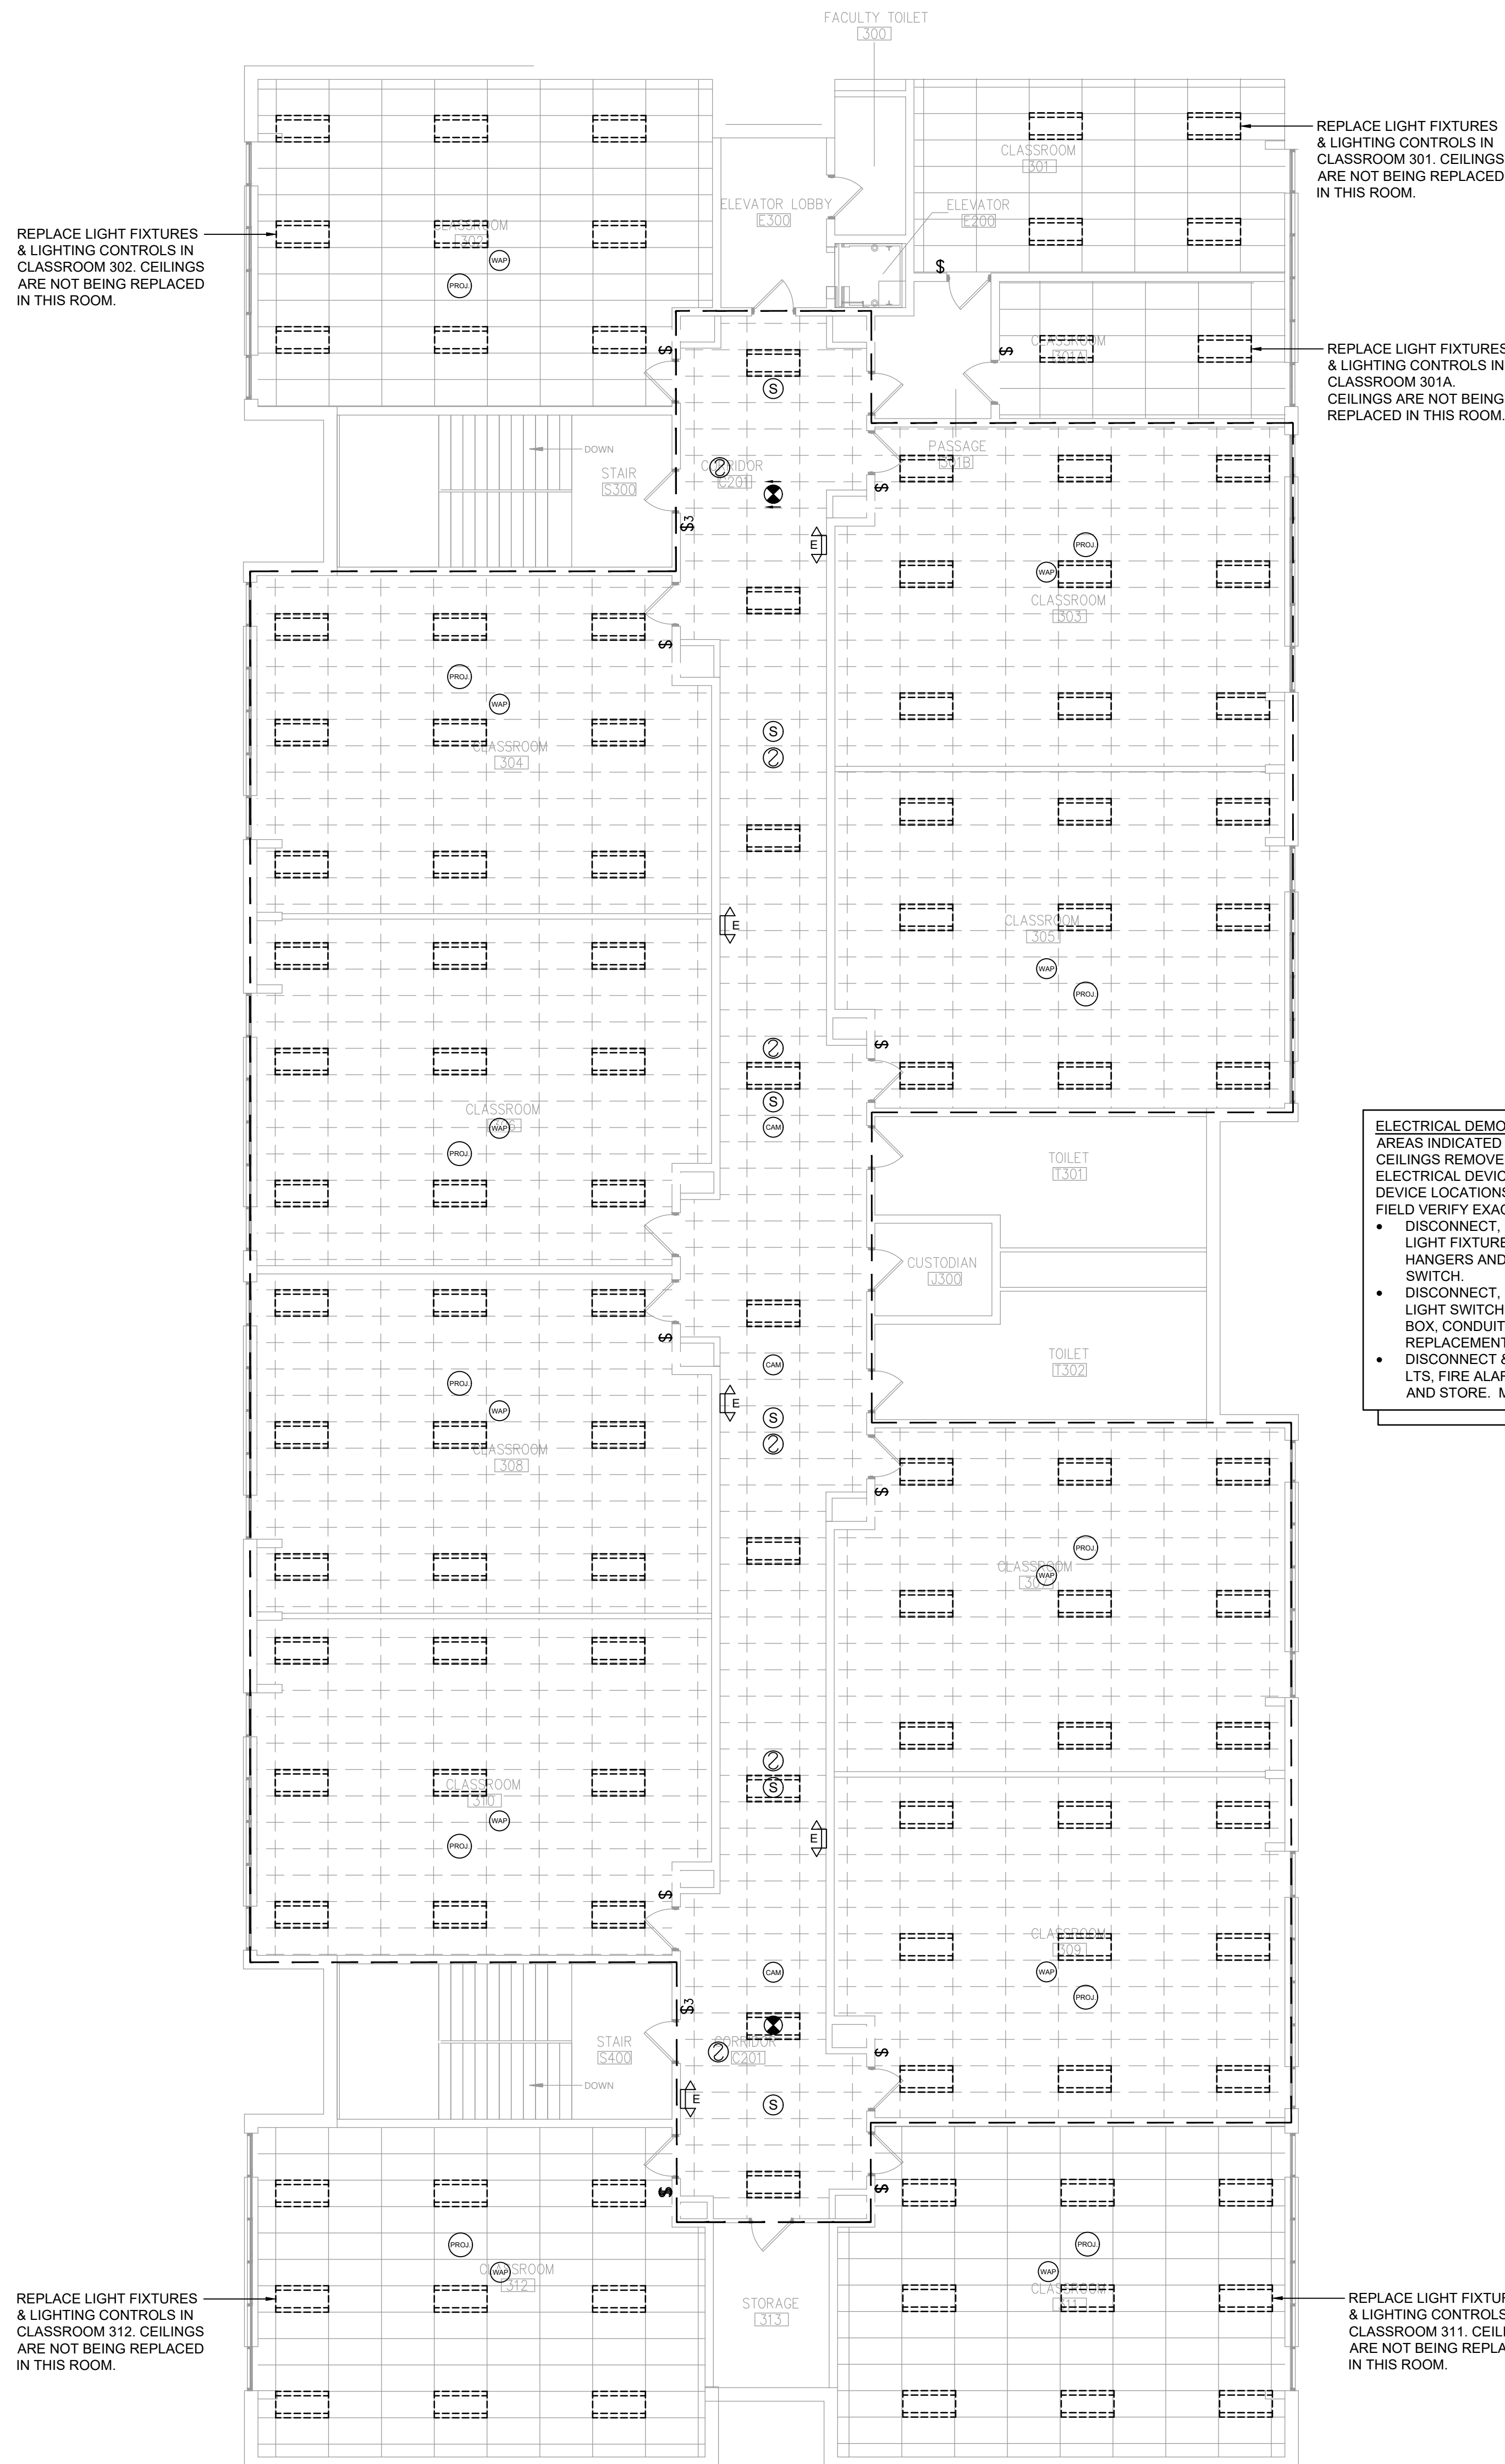

ELECTRICAL DEMOLITION NOTES:
AREAS INDICATED WITHIN DASHED LINES ARE TO HAVE EXISTING CEILINGS REMOVED. ELECTRICAL CONTRACTOR TO REMOVE ALL ELECTRICAL DEVICES WITHIN THESE CEILINGS. APPROXIMATE DEVICE LOCATION AND REFERENCE. CONTRACTOR TO FIELD VERIFY EXACT QUANTITY AND LOCATIONS.

- DISCONNECT, REMOVE & PROPERLY DISPOSE OF EXISTING LIGHT FIXTURES AND ASSOCIATED COMPONENTS INCLUDING HANGERS AND WIRING/CONDUIT. REMOVE WIRING BACK TO SWITCH.
- DISCONNECT, REMOVE & PROPERLY DISPOSE OF EXISTING LIGHT SWITCHES AND COVER PLATES. MAINTAIN EXISTING BOX, CONDUIT AND CIRCUIT FOR RECONNECTION TO REPLACEMENT SWITCH.
- DISCONNECT & REMOVE ALL CEILING DEVICES INCLUDING EXIT SIGNS, FIRE ALARM, WIRELESS ACCESS POINTS, SPEAKERS, ETC. AND STORE. MAINTAIN EXISTING WIRING FOR REINSTALLATION.