Replace Building Chillers Cook Chill Production Center 145 Old Orangeburg Road Orangeburg, NY Rockland County NYS OGS Project # 47430

# **ASBESTOS, LEAD and PCB ASSESSMENT**

HT:

Prepared for:

**Prepared by:** 





800 Route 146, Bldg. 200, Suite 280 Clifton Park, NY 12065 (518) 636-9956

Office of General Services

July 2023

#### TABLE OF CONTENTS

Introduction	. 1
Project Location Map	. 2
Asbestos Inspection	. 3
Analytical Results for Asbestos Samples	. 3
Lead Inspection	. 5
PCB Inspection	. 6
Conclusions and Recommendations	. 6
Data Gaps and Limitations	. 6

#### Appendices

#### Appendix A

Site Photos

#### Appendix B

Laboratory Results Chain of Custody Sample Location Map Material Quantities

#### Appendix C

Asbestos License



#### Figure 1 - Project Location Map

#### II. Asbestos Inspection

On June 30<sup>th</sup>, 2023 a certified NYSDOL/USEPA asbestos inspector screened suspect materials at the Orangeburg Cook Chill Production Center, located in Orangeburg, New York. A total of fifty-four (54) samples were collected for asbestos analysis. Sampled materials included insulation, spray foam, mastic, gasket material, pipe jacket, anti-percussive material, and black putty. Samples of each material were submitted to the laboratory for asbestos analysis. Photographs of the building can be found in **Appendix A**.

Asbestos samples were submitted to Response Labs for asbestos analysis. All friable samples were tested using NYS Polarized Light Microscopy (PLM method). Non-friable non- organic bound (NOB) samples were tested utilizing a Transmission Electron Microscopy (TEM) analysis.

	Cook Chill Production Center									
Sample No.	Sample Location	Sample Material	Analysis	Results						
DP-1	Double Wall Pipe	Black Pipe Coating	NOB/TEM Positive Stop	NAD						
DP-2	Double Wall Pipe Supply	Black Pipe Coating	NOB/TEM Positive Stop	NAD						
FR-1	Footing Riser	Black Percussive	NOB/TEM Positive Stop	NAD						
FB-1	Footing Bases	Black Percussive	NOB/TEM Positive Stop	NAD						
GM-1	Supply Duct Hallway Outside Chiller Room	Grey Mastic	NOB/TEM Positive Stop	NAD						
BF-1	Chiller Black Foam Insulation	Black Foam Insulation	NOB/TEM Positive Stop	NAD						
BF-2	Chiller Black Foam Insulation	Black Foam Insulation	NOB/TEM Positive Stop	NAD						
JF-1	Exterior Chiller Pipe Joint Face	Grey Caulk	NOB/TEM Positive Stop	NAD						
JF-2	Exterior Chiller Pipe Joint Face	Grey Caulk	NOB/TEM Positive Stop	NAD						
ECG-1	Exterior Chiller Compressor Gasket	Black Gasket	NOB/TEM Positive Stop	19.7%						

The following is a summary of the analytical laboratory results, which are included in Appendix C.

Electrical Room Ceilings	White	NOB/TEM	NAD
C	Fireproofing	Positive Stop	
	Spray Foam	-	
Electrical Room Ceilings	White	NOB/TEM	NAD
	Fireproofing	Positive Stop	
	Spray Foam		
Electrical Room Ceilings			NAD
		Positive Stop	
Interior Walls	Stone Masonry		NAD
		1	
Chiller Pump Unit	Brown Gasket	and a second state state state	NAD
		Positive Stop	
Chiller Pump Pipe Run Gasket	Black Gasket	NOB/TEM	NAD
		Positive Stop	
Chiller Pump Pipe Run Gasket	Black Gasket	NOB/TEM	NAD
		Positive Stop	
Chiller Pump Pipe Run End	White Caulk	NOB/TEM	NAD
Sections		Positive Stop	
Chiller Pump Pipe Run End	White Caulk	NOB/TEM	NAD
Sections		Positive Stop	
Chiller Exterior Pipe Runs	Yellow Insulation	NOB/TEM	NAD
-		Positive Stop	
Chiller Exterior Pipe Runs	Yellow Insulation	NOB/TEM	NAD
-		Positive Stop	
Chiller Exterior Pipe Runs	Yellow Insulation	NOB/TEM	NAD
*		Positive Stop	
Chiller Exterior Elbow	Yellow Insulation	NOB/TEM	NAD
Insulation			
Chiller Exterior Elbow	Yellow Insulation	-	NAD
Insulation			
	Yellow Insulation	-	NAD
	Yellow Insulation	-	NAD
Chiller Room Walls	Yellow Insulation	-	NAD
Chiller Room Walls	White Incket	-	NAD
	WILL JACKEL		
	Electrical Room Ceilings Interior Walls Chiller Pump Unit Chiller Pump Pipe Run Gasket Chiller Pump Pipe Run Gasket Chiller Pump Pipe Run End Sections Chiller Pump Pipe Run End Sections Chiller Exterior Pipe Runs Chiller Exterior Pipe Runs Chiller Exterior Pipe Runs Chiller Exterior Pipe Runs Chiller Exterior Elbow Insulation	Fireproofing Spray FoamElectrical Room CeilingsWhite Fireproofing Spray FoamElectrical Room CeilingsWhite Fireproofing Spray FoamElectrical Room CeilingsWhite Fireproofing Spray FoamInterior WallsStone MasonryChiller Pump UnitBrown GasketChiller Pump Pipe Run GasketBlack GasketChiller Pump Pipe Run GasketBlack GasketChiller Pump Pipe Run End SectionsWhite CaulkChiller Pump Pipe Run End SectionsWhite CaulkChiller Exterior Pipe RunsYellow InsulationChiller Exterior Elbow InsulationYellow InsulationChiller Room WallsYellow Insulation	Fireproofing Spray FoamPositive StopElectrical Room CeilingsWhiteNOB/TEMFireproofing Spray FoamPositive StopElectrical Room CeilingsWhiteNOB/TEMElectrical Room CeilingsWhiteNOB/TEMElectrical Room CeilingsWhiteNOB/TEMInterior WallsStone MasonryNOB/TEMOrthiller Pump UnitBrown GasketNOB/TEMChiller Pump Pipe Run GasketBlack GasketNOB/TEMChiller Pump Pipe Run GasketBlack GasketNOB/TEMPositive StopPositive StopPositive StopChiller Pump Pipe Run GasketBlack GasketNOB/TEMPositive StopPositive StopPositive StopChiller Pump Pipe Run End SectionsWhite CaulkNOB/TEMPositive StopPositive StopPositive StopChiller Exterior Pipe Runs SectionsYellow InsulationNOB/TEMPositive StopYellow InsulationNOB/TEM

WJ-2	Chiller Room Walls	White Jacket	NOB/TEM Positive Stop	NAD
PI-1	Chiller Pump Unit	Yellow Insulation	NOB/TEM Positive Stop	NAD
PI-2	Chiller Pump Unit	Yellow Insulation	NOB/TEM Positive Stop	NAD
PRB-1	Chiller Pump Pipe Runs	Brown Insulation	NOB/TEM Positive Stop	NAD
PRB-2	Chiller Pump Pipe Runs	Brown Insulation	NOB/TEM Positive Stop	NAD
PRB-3	Chiller Pump Pipe Runs	Brown Insulation	NOB/TEM Positive Stop	NAD
PRY-1	Chiller Pipe Runs	Yellow Insulation	NOB/TEM Positive Stop	NAD
PRY-2	Chiller Pipe Runs	Yellow Insulation	NOB/TEM Positive Stop	NAD
PRY-3	Chiller Pipe Runs	Yellow Insulation	NOB/TEM Positive Stop	NAD
HJ-1	Chiller Pipe Runs Solid Jacket	White Plastic	NOB/TEM Positive Stop	NAD
HJ-2	Chiller Pipe Runs Solid Jacket	White Plastic	NOB/TEM Positive Stop	NAD
PJ-1	Pump Unit	White Jacket	NOB/TEM Positive Stop	NAD
PJ-2	Pump Unit	White Jacket	NOB/TEM Positive Stop	NAD
PH-1	Chiller Pipe Runs Solid Jacket	White Plastic	NOB/TEM Positive Stop	NAD
PH-2	Chiller Pipe Runs Solid Jacket	White Plastic	NOB/TEM Positive Stop	NAD
BR-1	Backflow Pipe Runs	Yellow Insulation	NOB/TEM Positive Stop	NAD
BR-2	Backflow Pipe Runs	Yellow Insulation	NOB/TEM Positive Stop	NAD
BR-3	Backflow Pipe Runs	Yellow Insulation	NOB/TEM Positive Stop	NAD
BFJ-1	Backflow Pipe Runs	Green Jacket	NOB/TEM Positive Stop	NAD
BFJ-2	Backflow Pipe Runs	Green Jacket	NOB/TEM Positive Stop	NAD

EI-1	Chiller Pump Pipe Elbows	Orange Insulation	NOB/TEM Positive Stop	NAD
EI-2	Chiller Pump Pipe Elbows	Orange Insulation	NOB/TEM Positive Stop	NAD
EI-3	Chiller Pump Pipe Elbows	Orange Insulation	NOB/TEM Positive Stop	NAD
BC-1	Chiller Pump Condenser Lines	Black Foam Insulation	NOB/TEM Positive Stop	NAD
BC-2	Chiller Pump Condenser Lines	Black Foam Insulation	NOB/TEM Positive Stop	NAD
EP-1	Underground Electric Line Covering	Black Putty	NOB/TEM Positive Stop	NAD
EP-2	Underground Electric Line Covering	Black Putty	NOB/TEM Positive Stop	NAD

NAD – No Asbestos Detected NA/PS – Not Analyzed/Positive Stop

As indicated by the results, the compressor gasket on the exterior units is an ACM.

#### III. Lead Inspection

A lead assessment has been completed for this project. A site walkover was performed in June 2023. The purpose of the visit was to test any painted surfaces for lead. Three lead samples were taken and submitted to Adirondack Labs for analysis. Site photographs are included in **Appendix A**.

Sample	Sample	Sample Material	Analysis	Results (% lead by weight)
No.	Location			
YPL-1	Compression	Yellow Paint	LEAD	1.9
	Expansion Tank			
	Pipes			
BPL-1	Exterior Pipe and Stringers	Brown Paint	LEAD	0.01
GRPL-1	Chiller Exterior Unit Components	Grey Paint	LEAD	0.069

Lead-based paint is defined as paint exhibiting lead concentrations equal to or exceeding 1.0 milligram per square centimeter (mg/cm<sup>2</sup>) or 0.5% lead by weight by the Lead-Based Paint Poisoning Prevention Act. Based on the results, lead based paint is present in the yellow pipe paint.

#### IV. <u>PCB Inspection</u>

In addition to the lead and asbestos samples, the caulks located on the pipes and pipe joints were sampled and tested for PCBs. Three (3) PCB samples were taken and submitted to Adirondack Labs for analysis. The United States Environmental Protection Agency (USEPA) prohibits the use of materials with PCB levels above 50 ppm.

Sample	Sample	Sample Material	Analysis	Results(ppm)
No.	Location			
GC-1	Exterior Unit Pipe	Grey Caulk	PCB's	ND
	Joints			
WC-1	Chiller Pump Pipe	White Caulk	PCB's	ND
	<b>Run End Sections</b>			
JF-1	Exterior Chiller	Grey Caulk	PCB's	ND
	Pipe Joint Face			

The laboratory results indicated that the sampled materials are not in exceedance of the EPA standard. Site photographs are included in **Appendix A**.

#### V. <u>Conclusions and Recommendations</u>

The sampling results indicated that the black gasket on the compressor is an ACM. The yellow pipe paint sample submitted to the laboratory contained lead concentrations above the Lead Poisoning Prevention Act threshold. The sampling results determined that PCB's are not present in the sampled caulks.

#### VI. Data Gaps, LIMITATIONS and EXCEPTIONS

The following data gaps were identified during the completion of this investigation:

- The asbestos survey assessed the presence of accessible and/or exposed suspect ACMs that may be impacted by the proposed project. Although due diligence was given during the assessment, suspect ACMs may exist behind or beneath inaccessible spaces. All quantities are approximate and should be verified.
- OSPA's selection of sample locations and frequency of sampling was based on observations and the assumption that like materials in the same area are homogeneous in content.

- No electrical equipment, wiring, or other electrical components were inspected as the building power was live at the time of the survey. *These systems may contain asbestos.*
- The coring of solid floors and other solid surfaces was not in the scope of the work and was not performed as part of this survey. Asbestos may be found within or behind these surfaces upon demolition.
- There may be TSI or pipe insulation found in unseen cavities. A reasonable attempt was made to identify all TSI without performing full demolition.
- All locations on drawings are approximate and all quantities are estimated. Any contractor or other user of this report is required to physically visit the site to verify all measurements and confirm the quantities of materials to be removed, to be bid for removal, or for any other purpose.

No other warranties, expressed or implied, are made as to the professional services provided under the terms of our contract and included in this report.

The conclusions of this report are based in part, on the information provided by others. The possibility remains that unexpected environmental conditions may be encountered at the site in locations not specifically investigated. Should such an event occur, or the scope of project work be changed, OSPA Engineering Services, P.C. must be notified in order that we may determine if modifications to our conclusions are necessary.

# Appendix A Site Photos

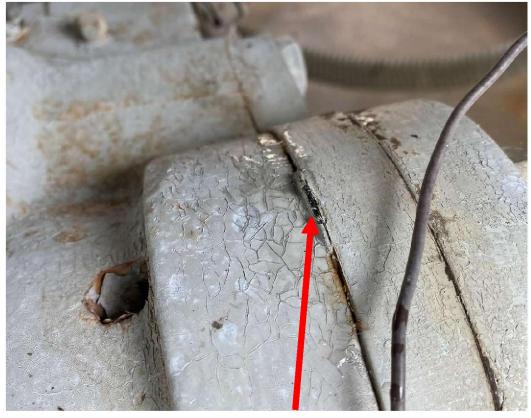


Photo 1: Black Gasket, exterior compressor units (ACM)

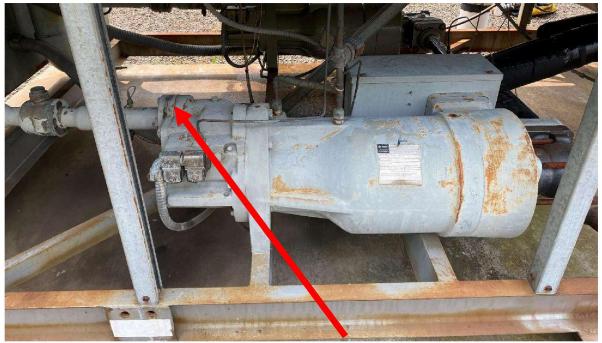


Photo 2: Exterior Compressor, Black Gasket (ACM)





Photo 3: Double Wall Pipe Transition



Photo 4: Black Percussive Footing Risers





Photo 5: Black Percussive Footing Base.



Photo 6: Grey Mastic, Supply Duct





**Photo 7: Black Foam Insulation** 



Photo 8: Grey Caulk





Photo 9: White Fireproofing Spray Foam



Photo 10: Interior Masonry Stone





Photo 11: Brown Gasket, Chiller Pump Unit



Photo 12: Yellow Insulation, Exterior Pipe Runs





Photo 13: Yellow Insulation and White Jacket, Chiller Room Walls



Photo 14: Yellow Insulation, Chiller Pump Unit





Photo 15: Solid Plastic Jacket, Brown Insulation, and Yellow Pipe Run Insulation



Photo 16: Backflow Pipe Green Jacket and Pipe Insulation





Photo 17: Black Spray Foam Insulation, Chiller Condenser Lines



Photo 18: Underground Electrical Line Putty





Photo 19: Yellow Insulation, Chiller Pipe Runs



Photo 20: Yellow Pipe Paint, Interior Auxiliary Chilled Water Equipment (Lead-Based Paint)



Appendix B Laboratory Results Chain of Custody Sample Location Map Material Quantities



### PLM Bulk Asbestos Report

8	OSPA Eng 300 Route I Clifton Pari	146 Bldg. 200,	280 5			Client Pı	oject Nu	mber: 43	0-1-0		
Project N	Vame: Orar	geburg Cook Chi	•	Laboratory Batch Number: 4946–28701 Sampled By: Client							
San	ıpling Area	<i>I</i> :						Colle	ection Dat	te: 6/30/2023 : 7/13/2023	
Lab Sample #	Customer Sample #	Homogeneity	Color	% Non-Fibrous Matrix Material		% of Organics	Gravime % of Acia Inorg		% of Residue	Total % of Asbestos	
29973	DP-1										
Sampled Ma	<i>terial</i> : Black	Pipe Coating				Other M	aterials	%	Asbesto	s Types:	
Sample Loca	ation: Double	e Wall Pipe									
Analyzed By Microscope		Method: Sei Turn Aroun		ient Out	Date:						
29974	DP-2										
Sampled Ma	aterial: Black	Pipe Coating				Other M	aterials	%	Asbesta	os Types:	
Sample Loc	ation: Double	e Wall Pipe Supply									
Analyzed By	<i>r</i> :	Method: Sei	nt Out								
Microscope		Turn Aroun	d Time: S	Sent Out	Date					4	
29975 Sampled Mi	FR-1 aterial: Black	Percussive				Other M	aterials	_%	Asbesto	os Types:	
Sample Loc	ation: Footin	g Riser									
Analyzed By	<i>ı</i> :	Method: Se	nt Out								
Microscope		Turn Aroun	nd Time: S	Sent Out	Date						
29976	FB-1										
Sampled M	aterial: Black	Percussive			-	Other M	aterials	%	Asbesto	os Types:	
Sample Loc	ration: Footin	g Bases									
Analyzed By	<i> </i> :	Method: Se	nt Out								
Microscope	e:	Turn Aroun	ud Time: S	Sent Out	Date	:					

**Definitons of Abbreviations:** NOB: Non-Organically Bound, Trace: Asbestos Detected at 1% or Less, TEM: Transmission Electron Microscope, Inc.: Inconclusive, NAD: No Asbestos Detected, NA/PS: Not Analyzed Positive Stop, NA: Not Analyzed, ACM: Asbestos Containing Material, NVA: No Visible Asbestos

Disclaimer: PLM is not consistently reliable in detecting asbestos in floor coverings and similar non-friable organically bound materials. No Asbestos Detected or Trace results by PLM 198.6 are considered inconclusive, TEM is currently the only method that can be used to determine if materials can be considered as non asbestos containing in NY State. This report cannot be reproduced except in full without the approval of Response Labs, LLC. This PLM report relates ONLY to the items tested. Liability is limited to the cost of analysis.

ELAP PLM Method 198.1 for friable samples or 198.6 for NOB Samples. There is no accreditation coverage available from any regulatory agency for Oualitative PLM. Vermiculite Disclaimer (7/9/13): This method does not remove vermiculite and may underestimate the level of asbestos present in a sample

containing greater than 10% vermiculite.

Comments:

Laboratory Director,

Teilah Morrison

Page 1 of 14



## PLM Bulk Asbestos Report

Project Name: Orangeburg Cook Chill Center

Sampling Area:

Laboratory Batch Number: 4946–28701 Sampled By: Client Collection Date: 6/30/2023 Date Received: 7/13/2023

Lab Sample #	Customer Sample #	Homogeneity	Color	% Non-Fibrous Matrix Material		% of Organics	% of Aci	etric Test d Soluble ganics	% of Residue	Total % of Asbestos
29977	GM-1									
Sampled Ma	terial: Grey l	Mastic				Other M	aterials	%	Asbesto	s Types:
Sample Loca	ation: Supply	Duct Hallway Out	side Chill	er Room						
Analyzed By	:	Method: Sei	nt Out							
Microscope	:	Turn Aroun	d Time: S	ent Out	Date:					
29978	BF-1									
Sampled Ma	a <i>terial:</i> Black	Foam Insulation				Other M	aterials	%	Asbesto	s Types:
Sample Loc	ation: Chiller	Black Foam Insula	tion							01
Analyzed By	:	Method: Ser	nt Out							
Microscope	:	Turn Aroun	d Time: S	ent Out	Date:					
29979	BF-2									
Sampled Ma	<i>terial</i> : Black	Foam Insulation				Other M	aterials	%	Asbesta	s Types:
Sample Loc	ation: Chiller	r Black Foam Insula	tion							
Analyzed By	:	Method: Se	nt Out							
Microscope		Turn Aroun	nd Time: S	Sent Out	Date					
29980	JF-1									
Sampled M	aterial: Grey	Caulk				Other M	aterials	%	Asbesta	os Types:
Sample Loc	ation: Exterio	or Chiller Pipe Joint	Face	•						
Analyzed By	<i>ı</i> :	Method: Se	nt Out							
Microscope		Turn Aroun	nd Time: 9	Sent Out	Date	:				

**Definitons of Abbreviations:** NOB: Non-Organically Bound, Trace: Asbestos Detected at 1% or Less, TEM: Transmission Electron Microscope, Inc.: Inconclusive, NAD: No Asbestos Detected, NA/PS: Not Analyzed Positive Stop, NA: Not Analyzed, ACM: Asbestos Containing Material, NVA: No Visible Asbestos

Disclaimer: PLM is not consistently reliable in detecting asbestos in floor coverings and similar non-friable organically bound materials. No Asbestos Detected or Trace results by PLM 198.6 are considered inconclusive, TEM is currently the only method that can be used to determine if materials can be considered as non asbestos containing in NY State. This report cannot be reproduced except in full without the approval of Response Labs, LLC. This PLM report relates ONLY to the items tested. Liability is limited to the cost of analysis. ELAP PLM Method 198.1 for friable samples or 198.6 for NOB Samples. There is no accreditation coverage available from any regulatory agency for Tabouttory Directory.

*Lear PLM Method 198.1 for fridde samples of 198.6 for NOB samples. There is no accreation coverage available from any regulatory agency for La Oualitative PLM. Vermiculite Disclaimer (7/9/13): This method does not remove vermiculite and may underestimate the level of asbestos present in a sample* 

Laboratory Director,

Teilah Morrison

Page 2 of 14

containing greater than 10% vermiculite. Comments:



#### PLM Bulk Asbestos Report 4946-28701 Project Name: Orangeburg Cook Chill Center Laboratory Batch Number: Sampled By: Client Collection Date: 6/30/2023 Sampling Area: Date Received: 7/13/2023 Gravimetric Test Total % of % Non-Fibrous Customer % of % of Acid Soluble % of Lab Homogeneity Color Matrix Material Asbestos Organics Inorganics Residue Sample # Sample # 29981 JF-1 Sampled Material: Grey Caulk Asbestos Types: Other Materials % Sample Location: Exterior Chiller Pipe Joint Face Analyzed By: Method: Sent Out Date: Turn Around Time: Sent Out Microscope: 29982 ECG-1 Sampled Material: Black Gasket Asbestos Types: **Other Materials** % Sample Location: Exterior Chiller Compressor Gasket Method: Sent Out Analyzed By: Turn Around Time: Sent Out Date: Microscope: 29983 ES-1 Sampled Material: White Fireproofing Spray Foam Other Materials Asbestos Types: % Sample Location: Electrical Room Ceilings Analyzed By: Method: Sent Out Turn Around Time: Sent Out Date: Microscope: 29984 ES-2 Sampled Material: White Fireproofing Spray Foam Other Materials % Asbestos Types: Sample Location: Electrical Room Ceilings Method: Sent Out Analyzed By: Date: Turn Around Time: Sent Out Microscope:

Definitons of Abbreviations: NOB: Non-Organically Bound, Trace: Asbestos Detected at 1% or Less, TEM: Transmission Electron Microscope, Inc.: Inconclusive, NAD: No Asbestos Detected, NA/PS: Not Analyzed Positive Stop, NA: Not Analyzed, ACM: Asbestos Containing Material, NVA: No Visible Asbestos

Disclaimer: PLM is not consistently reliable in detecting asbestos in floor coverings and similar non-friable organically bound materials. No Asbestos Detected or Trace results by PLM 198.6 are considered inconclusive, TEM is currently the only method that can be used to determine if materials can be considered as non asbestos containing in NY State. This report cannot be reproduced except in full without the approval of Response Labs, LLC. This PLM report relates ONLY to the items tested. Liability is limited to the cost of analysis. ELAP PLM Method 198.1 for friable samples or 198.6 for NOB Samples. There is no accreditation coverage available from any regulatory agency for

**Oualitative** PLM. Vermiculite Disclaimer (7/9/13): This method does not remove vermiculite and may underestimate the level of asbestos present in a sample

Laboratory Director,

Teilah Morrison

#### containing greater than 10% vermiculite. Comments:



		P	LIVI	Buik Asoes	sto:	s керо	rı		Come States and States	un det in de la carte de	
Project Name: Orangeburg Cook Chill Center Sampling Area:						Laboratory Batch Number: 4946–28701 Sampled By: Client Collection Date: 6/30/2023 Date Received: 7/13/2023					
Lab Sample #	Customer Sample #	Homogeneity (	Color	% Non-Fibrous Matrix Material		% of Organics	Gravime % of Acid Inorg	Soluble	% of Residue	Total % of Asbestos	
29985	ES-3	a any supportant to support the									
Sampled Ma	terial: White	Fireproofing Spray Fo	oam			Other Ma	iterials	%	Asbesto	s Types:	
Sample Loca	<i>ition</i> : Electri	cal Room Ceilings			5			-			
Analyzed By: Microscope:		Method: Sent Turn Around		ent Out	Date	:					
29986	IM-1										
Sampled Ma	<i>terial:</i> Stone	Masonry				Other M	aterials	%	Asbesta	s Types:	
Sample Loca	a <i>tion:</i> Interio	or Walls									
Analyzed By	:	Method: Sent	Out								
Microscope.	:	Turn Around	Time: S	ent Out	Date	:					
29987	PG-1										
Sampled Ma	aterial: Brow	n Gasket				Other M	aterials	%	Asbesto	os Types:	
Sample Loci	ation: Chille	r Pump Unit									
Analyzed By	:	Method: Sent	Out								
Microscope		Turn Around	Time: S	ent Out	Date	:					
29988	PRG-1										
Sampled Ma	aterial: Black	Gasket			-	Other M	aterials	%	Asbesta	os Types:	
Sample Loc	ation: Chille	r Pump Pipe Run Gasl	ket								
Analyzed By	<i>ı</i> :	Method: Sent	Out								
Microscope	?:	Turn Around	Time: S	Gent Out	Date	5					

Disclaimer: PLM is not consistently reliable in detecting asbestos in floor coverings and similar non-friable organically bound materials. No Asbestos Detected or Trace results by PLM 198.6 are considered inconclusive, TEM is currently the only method that can be used to determine if materials can be considered as non asbestos containing in NY State. This report cannot be reproduced except in full without the approval of Response Labs, LIC. This PLM report relates ONLY to the items tested. Liability is limited to the cost of analysis. ELAP PLM Method 198.1 for friable samples or 198.6 for NOB Samples. There is no accreditation coverage available from any regulatory agency for

**Oualitative** PLM. Vermiculite Disclaimer (7/9/13): This method does not remove vermiculite and may underestimate the level of asbestos present in a sample containing greater than 10% vermiculite.

Comments:

Laboratory Director,



		<i>P</i> .	LM Bulk A	sbestos	s Repo	rt					
•	ame: Orar pling Area	ngeburg Cook Chill ( 1:	Center		Laboratory Batch Number: 4946–28701 Sampled By: Client Collection Date: 6/30/2023 Date Received: 7/13/2023						
	Customer Sample #	Homogeneity C	% Non-Fil Color Matrix Ma	178-2990 (MAR)	% of Organics	Gravime % of Acia Inorg		% of Residue	Total % of Asbestos		
29989	PRG-2										
Sampled Mat	<i>terial:</i> Black	Gasket			Other Ma	aterials	%	Asbesto	s Types:		
Sample Loca	tion: Chiller	r Pump Pipe Run Gask	et								
Analyzed By:		Method: Sent (	Out								
Microscope:		Turn Around	Time: Sent Out	Date:							
29990	WC-1										
Sampled Ma	terial: White	e Caulk			Other Ma	aterials	%	Asbesto	s Types:		
Sample Loca	tion: Chille	r Pump Pipe Run End	Sections								
Analyzed By:		Method: Sent	Out								
Microscope:		Turn Around	Time: Sent Out	Date							
29991	WC-2										
Sampled Ma	terial: White	e Caulk			Other Ma	aterials	%	Asbesto	s Types:		
Sample Loca	tion: Chille	r Pump Pipe Run End	Sections								
Analyzed By:		Method: Sent	Out								
Microscope:		Turn Around	Time: Sent Out	Date	:						
29992	PRE-1										
Sampled Ma	terial: Yello	w Insulation		_	Other M	aterials	%	Asbesto	s Types:		
Sample Loca	tion: Chille	r Exterior Pipe Runs									
Analyzed By:		Method: Sent	Out								
Microscone:		Turn Around	Time: Sent Out	Date	r						

Disclaimer: PLM is not consistently reliable in detecting asbestos in floor coverings and similar non-friable organically bound materials. No Asbestos Detected or Trace results by PLM 198.6 are considered inconclusive, TEM is currently the only method that can be used to determine if materials can be considered as non asbestos containing in NY State. This report cannot be reproduced except in full without the approval of Response Labs, LLC. This PLM report relates ONLY to the items tested. Liability is limited to the cost of analysis. ELAP PLM Method 198.1 for friable samples or 198.6 for NOB Samples. There is no accreditation coverage available from any regulatory agency for

**Oualitative** PLM. Vermiculite Disclaimer (7/9/13): This method does not remove vermiculite and may underestimate the level of asbestos present in a sample Laboratory Director,

Teilah Morrison

containing greater than 10% vermiculite. Comments:



		PLN	I Bulk Asbes	sto	s керо	rt		Course and the second second		
•	lame: Orar pling Area	ngeburg Cook Chill Cent 7:	er	Laboratory Batch Number: 4946–28701 Sampled By: Client Collection Date: 6/30/2023 Date Received: 7/13/2023						
Lab Sample #	Customer Sample #	Homogeneity Colo	% Non-Fibrous r Matrix Material	5	% of Organics	Gravimet % of Acid Inorga	Soluble	% of Residue	Total % of Asbestos	
29993	PRE-2									
Sampled Ma	terial: Yellow	w Insulation			Other Ma	aterials	%	Asbesta	os Types:	
Sample Loca	tion: Chiller	Exterior Pipe Runs								
Analyzed By:		Method: Sent Out								
Microscope:		Turn Around Time:	Sent Out	Date.						
29994	PRE-3									
Sampled Ma	terial: Yello	w Insulation			Other M	aterials	%	Asbesta	os Types:	
Sample Loca	ation: Chiller	r Exterior Pipe Runs								
Analyzed By:	:	Method: Sent Out								
Microscope:		Turn Around Time.	Sent Out	Date						
29995	EIE-1									
Sampled Ma	aterial: Yello	w Insulation			Other M	aterials	%	Asbest	os Types:	
Sample Loca	ation: Chille	r Exterior Elbow Insulation								
Analyzed By	:	Method: Sent Out								
Microscope		Turn Around Time	Sent Out	Date	:		_			
29996	EIE-2									
Sampled Ma	a <i>terial:</i> Yello	w Insulation			Other M	aterials	%	Asbest	os Types:	
Sample Loci	ation: Chille	r Exterior Elbow Insulatior	í.							
Analyzed By	:	Method: Sent Out								
Microscope		Turn Around Time	: Sent Out	Date	:					

Disclaimer: PLM is not consistently reliable in detecting asbestos in floor coverings and similar non-friable organically bound materials. No Asbestos Detected or Trace results by PLM 198.6 are considered inconclusive, TEM is currently the only method that can be used to determine if materials can be considered as non asbestos containing in NY State. This report cannot be reproduced except in full without the approval of Response Labs, LLC. This PLM report relates ONLY to the items tested. Liability is limited to the cost of analysis. ELAP PLM Method 198.1 for friable samples or 198.6 for NOB Samples. There is no accreditation coverage available from any regulatory agency for Laboratory Director, **Oualitative PLM.** 

Vermiculite Disclaimer (7/9/13): This method does not remove vermiculite and may underestimate the level of asbestos present in a sample containing greater than 10% vermiculite.

Comments:



		PLM	Bulk Asbes	stos	5 керо <sup>-</sup>	rt	a bet grant to be a	Colorest Colorest	The second framework which and
	ame: Orar oling Area	ngeburg Cook Chill Center a:			Labor	ratory Bo	Samj Colle	pled By: C ection Dat	6–28701 lient t <b>e:</b> 6/30/2023 t 7/13/2023
	Customer Sample #	Homogeneity Color	% Non-Fibrous Matrix Material		% of Organics	Gravime % of Acid Inorg	l Soluble	% of Residue	Total % of Asbestos
29997	EIE-3								
Sampled Mat	erial: Yellow	w Insulation			Other Ma	aterials	%	Asbesto	s Types:
Sample Locat	tion: Chiller	r Exterior Elbow Insulation							
Analyzed By:		Method: Sent Out							
Microscope:		Turn Around Time: S	ent Out	Date:					
29998	WI-1								
Sampled Mat	erial: Yello	w Insulation			Other Ma	aterials	%	Asbesta	s Types:
Sample Locat	tion: Chille	r Room Walls							
Analyzed By:		Method: Sent Out							
Microscope:		Turn Around Time: 9	ient Out	Date:					
29999	WI-2								
Sampled Mat	terial: Yello	w Insulation			Other M	aterials	%	Asbesta	os Types:
Sample Locat	tion: Chille	r Room Walls							
Analyzed By:		Method: Sent Out							
Microscope:		Turn Around Time: 9	Sent Out	Date	:				
30000	WJ-1								
Sampled Mat	terial: Whit	e Jacket		_	Other M	aterials	%	Asbeste	os Types:
Sample Loca	tion: Chille	r Room Walls							
Analyzed By:		Method: Sent Out							
Microscope:		Turn Around Time:	Sent Out	Date	:				

Disclaimer: PLM is not consistently reliable in detecting asbestos in floor coverings and similar non-friable organically bound materials. No Asbestos Detected or Trace results by PLM 198.6 are considered inconclusive, TEM is currently the only method that can be used to determine if materials can be considered as non asbestos containing in NY State. This report cannot be reproduced except in full without the approval of Response Labs, LLC. This PLM report relates ONLY to the items tested. Liability is limited to the cost of analysis. ELAP PLM Method 198.1 for friable samples or 198.6 for NOB Samples. There is no accreditation coverage available from any regulatory agency for

**Oualitative** PLM. Vermiculite Disclaimer (7/9/13): This method does not remove vermiculite and may underestimate the level of asbestos present in a sample containing greater than 10% vermiculite.

Comments:

Laboratory Director,



		I LIVI	Duik Asves	103	перы	L	CANES DE LA COLORA DA LA COLORA D	the sector of the sector of the	
	lame: Orar pling Area	ngeburg Cook Chill Center 7:			Labor	atory Ba	Samp Colle	oled By: C	e: 6/30/2023
	Customer Sample #	Homogeneity Color	% Non-Fibrous Matrix Material		% of Organics	Gravime % of Acia Inorg	tric Test I Soluble	% of Residue	Total % of Asbestos
30001	WJ-2	and the second strategy is the second		A DESCRIPTION OF					
Sampled Ma	terial: White	Jacket			Other Ma	terials	%	Asbesto	s Types:
Sample Loca	tion: Chiller	r Room Walls							
Analyzed By: Microscope:		Method:Sent Out Turn Around Time: S	ent Out	Date:					
30002	PI-1			an a					
Sampled Ma	terial: Yello	w Insulation			Other Ma	terials	%	Asbesto	s Types:
Sample Loca	ation: Chille	r Pipe Unit							
Analyzed By:		Method: Sent Out							
Microscope:		Turn Around Time: S	ent Out	Date:					
30003	PI-2								
Sampled Ma	<i>terial</i> : Yello	w Insulation			Other Ma	iterials	%	Asbesto	s Types:
Sample Loca	ation: Chille	r Pipe Unit							
Analyzed By	:	Method: Sent Out							
Microscope		Turn Around Time: S	Sent Out	Date.	r				
30004	PRB-1								
Sampled Ma	aterial: Brow	n Insulation		-	Other Ma	aterials	%	Asbesto	os Types:
Sample Loci	ation: Chille	r Pump Pipe Runs							
Analyzed By	:	Method: Sent Out							
Microscope	:	Turn Around Time: §	Sent Out	Date	:				

Disclaimer: PLM is not consistently reliable in detecting asbestos in floor coverings and similar non-friable organically bound materials. No Asbestos Detected or Trace results by PLM 198.6 are considered inconclusive, TEM is currently the only method that can be used to determine if materials can be considered as non asbestos containing in NY State. This report cannot be reproduced except in full without the approval of Response Labs, LLC. This PLM report relates ONLY to the items tested. Liability is limited to the cost of analysis. ELAP PLM Method 198.1 for friable samples or 198.6 for NOB Samples. There is no accreditation coverage available from any regulatory agency for

**Oualitative** PLM. Vermiculite Disclaimer (7/9/13): This method does not remove vermiculite and may underestimate the level of asbestos present in a sample containing greater than 10% vermiculite.

Comments:

Laboratory Director,



		PLM	Bulk Asbes	stos	s Repor	rt			arme generative com We HZ
	lame: Orar pling Area	ngeburg Cook Chill Center <b>1:</b>			Laboi	atory Ba	Samp Colle	oled By: C ection Dat	6—28701 lient t <b>e:</b> 6/30/2023 ; 7/13/2023
Lab Sample #	Customer Sample #	Homogeneity Color	% Non-Fibrous Matrix Material		% of Organics	Gravime % of Acid Inorge	Soluble	% of Residue	Total % of Asbestos
30005	PRB-2								
Sampled Ma	terial: Brown	n Insulation			Other Ma	terials	%	Asbesto	s Types:
Sample Loca	tion: Chiller	Pump Pipe Runs							
Analyzed By:		Method: Sent Out							
Microscope:		Turn Around Time: S	ent Out	Date:					
30006	PRB-3								
Sampled Ma	terial: Brow	n Insulation			Other Ma	iterials	%	Asbesto	s Types:
Sample Loca	ation: Chille	r Pump Pipe Runs		-					
Analyzed By.	:	Method: Sent Out							
Microscope.		Turn Around Time: S	ent Out	Date:					
30007	PRY-1								
Sampled Ma	aterial: Yello	w Insulation			Other Ma	aterials	%	Asbesta	s Types:
Sample Loca	ation: Chille	r Pipe Runs							
Analyzed By	:	Method: Sent Out							
Microscope		Turn Around Time: S	Sent Out	Date:					
30008	PRY-2								
Sampled Ma	a <i>terial:</i> Yello	w Insulation			Other M	aterials	%	Asbesta	os Types:
Sample Loc	ation: Chille	r Pipe Runs							
Analyzed By	:	Method: Sent Out							
Microscove		Turn Around Time: 9	Sent Out	Date					

Disclaimer: PLM is not consistently reliable in detecting asbestos in floor coverings and similar non-friable organically bound materials. No Asbestos Detected or Trace results by PLM 198.6 are considered inconclusive, TEM is currently the only method that can be used to determine if materials can be considered as non asbestos containing in NY State. This report cannot be reproduced except in full without the approval of Response Labs, LLC. This PLM report relates ONLY to the items tested. Liability is limited to the cost of analysis. ELAP PLM Method 198.1 for friable samples or 198.6 for NOB Samples. There is no accreditation coverage available from any regulatory agency for the approach of the cost of the samples of the cost of the samples.

Oualitative PLM. Vermiculite Disclaimer (7/9/13): This method does not remove vermiculite and may underestimate the level of asbestos present in a sample containing greater than 10% vermiculite.

Comments:

Laboratory Director,



		PLM	Bulk Asbes	stos	s Repor	rt	Contraction of the last	the second s	
	me: Orangel ling Area:	ourg Cook Chill Center			Labor	atory Ba	Samj Colle	oled By: C ection Dat	6 – 28701 lient <b>e:</b> 6/30/2023 7/13/2023
	ustomer Sample # H	lomogeneity Color	% Non-Fibrous Matrix Material		% of Organics	Gravime % of Acid Inorge	Soluble	% of Residue	Total % of Asbestos
30009	PRY-3								
Sampled Mate	rial: Yellow In	sulation			Other Ma	terials	%	Asbesto	s Types:
Sample Locati	on: Chiller Pip	e Runs					Sec. 2. 2		
Analyzed By:		Method: Sent Out							
Microscope:		Turn Around Time: S	ent Out	Date:					
30010	HJ-1								
Sampled Mate	erial: White Pla	istic			Other Ma	aterials	%	Asbesto	s Types:
Sample Locati	ion: Chiller Pij	oe Runs Solid Jacket							
Analyzed By:		Method: Sent Out							
Microscope:		Turn Around Time: S	ent Out	Date:					
30011	HJ-2								
Sampled Mate	erial: White Pla	astic			Other Ma	aterials	%	Asbesto	s Types:
Sample Locati	ion: Chiller Pij	pe Runs Solid Jacket							
Analyzed By:		Method:							
Microscope:		Turn Around Time: (	ſ	Date.					
30012	PJ-1								
Sampled Mate	erial: White Jac	cket		-	Other M	aterials	%	Asbesta	os Types:
Sample Locat	<i>ion</i> : Pump Un	it							
Analyzed By:		Method: Sent Out							
Microscope:		Turn Around Time: 9	Gent Out	Date	:			_	

Disclaimer: PLM is not consistently reliable in detecting asbestos in floor coverings and similar non-friable organically bound materials. No Asbestos Detected or Trace results by PLM 198.6 are considered inconclusive, TEM is currently the only method that can be used to determine if materials can be considered as non asbestos containing in NY State. This report cannot be repraduced except in full without the approval of Response Labs, LLC. This PLM report relates ONLY to the items tested. Liability is limited to the cost of analysis. ELAP PLM Method 198.1 for friable samples or 198.6 for NOB Samples. There is no accreditation coverage available from any regulatory agency for the approach of the cost of analysis.

Oualitative PLM. Vermiculite Disclaimer (7/9/13): This method does not remove vermiculite and may underestimate the level of asbestos present in a sample containing greater than 10% vermiculite.

Comments:

Laboratory Director,



		PLM	Bulk Asbes	stos	s керо	rı			
	ame: Orar pling Area	ngeburg Cook Chill Center 7:	r		Labor	atory Ba	Samj Colle	pled By: © ection Dat	16—28701 Elient te: 6/30/2023 ; 7/13/2023
	Customer Sample #	Homogeneity Color	% Non-Fibrous Matrix Material		% of Organics	Gravime % of Acid Inorg	Soluble	% of Residue	Total % of Asbestos
30013	PJ-2								
Sampled Ma	terial: White	Jacket			Other Ma	iterials	%	Asbesto	os Types:
Sample Loca	tion: Pump	Unit							
Analyzed By:		Method: Sent Out							
Microscope:		Turn Around Time: S	Sent Out	Date:					
30014	PH-1								
Sampled Ma	terial: White	e Plastic			Other Ma	aterials	%	Asbesto	os Types:
Sample Loca	tion: Chille	r Pipe Runs Solid Jacket							
Analyzed By:		Method: Sent Out							
Microscope:		Turn Around Time: 9	Sent Out	Date:					
30015	PH-2								
Sampled Ma	terial: White	e Plastic			Other Ma	aterials	%	Asbesto	os Types:
Sample Loca	ation: Chille	r Pipe Runs Solid Jacket							
Analyzed By:		Method: Sent Out							
Microscope:		Turn Around Time: S	Sent Out	Date	:				
30016	BR-1								
Sampled Ma	<i>terial</i> : Yello	w Insulation			Other M	aterials	%	Asbest	os Types:
Sample Loca	ation: Backf	low Pipe Runs							
Analyzed By	:	Method: Sent Out							
Microscope		Turn Around Time:	Sent Out	Date	:				

Disclaimer: PLM is not consistently reliable in detecting asbestos in floor coverings and similar non-friable organically bound materials. No Asbestos Detected or Trace results by PLM 198.6 are considered inconclusive, TEM is currently the only method that can be used to determine if materials can be considered as non asbestos containing in NY State. This report cannot be reproduced except in full without the approval of Response Labs, LLC. This PLM report relates ONLY to the items tested. Liability is limited to the cost of analysis. ELAP PLM Method 198.1 for friable samples or 198.6 for NOB Samples. There is no accreditation coverage available from any regulatory agency for

Vermiculite Disclaimer (7/9/13): This method does not remove vermiculite and may underestimate the level of asbestos present in a sample

Laboratory Director,

Teilah Morrison

containing greater than 10% vermiculite.

#### Comments:

**Oualitative PLM.** 



		PLM	Bulk Asbes	stos	<i>Kepo</i>	rı			
-	me: Orang ling Area:	eburg Cook Chill Center			Labor	atory Bi	Samp Colle	oled By: C	te: 6/30/2023
100 10 m	ustomer ample #	Homogeneity Color	% Non-Fibrous Matrix Material		% of Organics	Gravime % of Acia Inorg	l Soluble	% of Residue	Total % of Asbestos
30017	BR-2								
Sampled Mate	rial: Yellow	Insulation			Other Ma	terials	%	Asbesto	s Types:
Sample Locati	on: Backflow	v Pipe Runs							
Analyzed By:		Method: Sent Out							
Microscope:		Turn Around Time: S	ent Out	Date:					
30018	BR-3								
Sampled Mate	erial: Yellow	Insulation			Other Ma	aterials	%	Asbesto	s Types:
Sample Locati	on: Backflow	v Pipe Runs							
Analyzed By:		Method: Sent Out							
Microscope:		Turn Around Time: 9	ent Out	Date:					
30019	BFJ-1								
Sampled Mate	e <b>rial:</b> Green J	acket			Other Ma	aterials	%	Asbesta	os Types:
Sample Locati	ion: Backflow	w Pipe Runs							
Analyzed By:		Method: Sent Out							
Microscope:		Turn Around Time: S	Sent Out	Date				and the second second	
30020	BFJ-2								
Sampled Mate	erial: Green ]	Jacket		-	Other M	aterials	%	Asbeste	os Types:
Sample Locat	ion: Backflo	w Pipe Runs							
Analyzed By:		Method: Sent Out							
Microscope:		Turn Around Time:	Sent Out	Date	:				

Disclaimer: PLM is not consistently reliable in detecting asbestos in floor coverings and similar non-friable organically bound materials. No Asbestos Detected or Trace results by PLM 198.6 are considered inconclusive, TEM is currently the only method that can be used to determine if materials can be considered as non asbestos containing in NY State. This report cannot be reproduced except in full without the approval of Response Labs, LLC. This PLM report relates ONLY to the items tested. Liability is limited to the cost of analysis. ELAP PLM Method 198.1 for friable samples or 198.6 for NOB Samples. There is no accreditation coverage available from any regulatory agency for Laboratory Director,

Oualitative PLM. Vermiculite Disclaimer (7/9/13): This method does not remove vermiculite and may underestimate the level of asbestos present in a sample containing greater than 10% vermiculite.

Comments:

Lave A .

Teilah Morrison

Page 12 of 14



	PLM Bulk Asbes	stos Report	Constant Description	And the second second second second second
Project Name Sampling	: Orangeburg Cook Chill Center g Area:	Laboratory Ba	Samj Colle	nber: 4946–28701 pled By: Client ection Date: 6/30/2023 Received: 7/13/2023
	omer % Non-Fibrous ple # Homogeneity Color Matrix Material	Gravimetr % of % of Acid Organics Inorga	Soluble	% of Residue Asbestos
30021 EI	-1			
Sampled Material	: Orange Insulation	Other Materials	%	Asbestos Types:
Sample Location:	Chiller Pump Pipe Elbows			
Analyzed By:	Method: Sent Out			
Microscope:	Turn Around Time: Sent Out	Date:		
30022 El	-2			
Sampled Materia	l: Orange Insulation	Other Materials	%	Asbestos Types:
Sample Location:	Chiller Pump Pipe Elbows			
Analyzed By:	Method: Sent Out			
Microscope:	Turn Around Time: Sent Out	Date:		
30023 E	I-3			
Sampled Materia	l: Orange Insulation	Other Materials	%	Asbestos Types:
Sample Location	Chiller Pump Pipe Elbows			
Analyzed By:	Method: Sent Out			
Microscope:	Turn Around Time: Sent Out	Date:		
30024 B	C-1			
Sampled Materia	l: Black Foam Insulation	Other Materials	_%	Asbestos Types:
Sample Location	: Chiller Pump Condenser Lines			
Analyzed By:	Method: Sent Out			
Microscove:	Turn Around Time: Sent Out	Date:		

Disclaimer: PLM is not consistently reliable in detecting asbestos in floor coverings and similar non-friable organically bound materials. No Asbestos Detected or Trace results by PLM 198.6 are considered inconclusive, TEM is currently the only method that can be used to determine if materials can be considered as non asbestos containing in NY State. This report cannot be reproduced except in full without the approval of Response Labs, LLC. This PLM report relates ONLY to the items tested. Liability is limited to the cost of analysis. ELAP PLM Method 198.1 for friable samples or 198.6 for NOB Samples. There is no accreditation coverage available from any regulatory agency for Laboratory Director, **Oualitative PLM.** 

Vermiculite Disclaimer (7/9/13): This method does not remove vermiculite and may underestimate the level of asbestos present in a sample containing greater than 10% vermiculite.

Comments:

Teilah Morrison

Page 13 of 14



#### PLM Bulk Asbestos Report

4946-28701 Project Name: Orangeburg Cook Chill Center Laboratory Batch Number: Sampled By: Client Collection Date: 6/30/2023 Sampling Area: 7/13/2023 Date Received: Gravimetric Test Total % of % Non-Fibrous % of % of Acid Soluble Lab Customer % of Matrix Material Residue Asbestos Organics Inorganics Homogeneity Color Sample # Sample # 30025 BC-2 Sampled Material: Black Foam Insulation Asbestos Types: **Other Materials** % Sample Location: Chiller Pump Condenser Lines Method: Sent Out Analyzed By: Date: Microscope: Turn Around Time: Sent Out 30026 EP-1 Sampled Material: Black Putty Other Materials Asbestos Types: % Sample Location: Underground Electric Line Covering Analyzed By: Method: Sent Out Turn Around Time: Sent Out Date: Microscope: 30027 EP-2 Sampled Material: Black Putty Asbestos Types: **Other Materials** % Sample Location: Underground Electric Line Covering Analyzed By: Method: Sent Out Turn Around Time: Sent Out Date: Microscope:

Definitons of Abbreviations: NOB: Non-Organically Bound, Trace: Asbestos Detected at 1% or Less, TEM: Transmission Electron Microscope, Inc.: Inconclusive, NAD: No Asbestos Detected, NA/PS: Not Analyzed Positive Stop, NA: Not Analyzed, ACM: Asbestos Containing Material, NVA: No Visible Asbestos

Disclaimer: PLM is not consistently reliable in detecting asbestos in floor coverings and similar non-friable organically bound materials. No Asbestos Detected or Trace results by PLM 198.6 are considered inconclusive, TEM is currently the only method that can be used to determine if materials can be considered as non asbestos containing in NY State. This report cannot be reproduced except in full without the approval of Response Labs, LLC. This PLM report relates ONLY to the items tested. Liability is limited to the cost of analysis.

ELAP PLM Method 198.1 for friable samples or 198.6 for NOB Samples. There is no accreditation coverage available from any regulatory agency for Oualitative PLM.

Vermiculite Disclaimer (7/9/13): This method does not remove vermiculite and may underestimate the level of asbestos present in a sample containing greater than 10% vermiculite.
Comments:

Laboratory Director,

Teilah Morrison

Non-television in the second



AmeriSci New York

117 EAST 30TH ST. NEW YORK, NY 10016 TEL: (212) 679-8600 • FAX: (212) 679-3114

## PLM Bulk Asbestos Report

Respo	onse Labs
Attn:	Teilah Morrison
828 V	Vashington Avenue

Date Received	07/14/23	AmeriS	ci Jok	) #	223072612
Date Examined	07/18/23	P.O. #			
ELAP #	11480	Page	1	of	10
RE: 430-1-0; Ora	angeburg Coo	ok Chill Cen	ter		

Albany, NY 12203

Client No. / HGA	Lab No.	<b>Asbestos Present</b>	Total % Asbestos
	223072612-01 n: Double Wall Pipe - Black Pipe Coating <, Homogeneous, Non-Fibrous, Bulk Ma		NAD (by NYS ELAP 198.6) by Bo Sun on 07/18/23
Asbestos Types: Other Material: Non-			
DP-2 Locatio	223072612-02 n: Double Wall Pipe Supply - Black Pipe	<b>No</b> Coating	NAD (by NYS ELAP 198.6) by Bo Sun on 07/18/23
Analyst Description: Black Asbestos Types: Other Material: Non-	k, Homogeneous, Non-Fibrous, Bulk Ma fibrous 21.9%	terial	and a strength of the strength
	223072612-03 on: Footing Riser - Black Percussive k, Homogeneous, Non-Fibrous, Bulk Ma	No	NAD (by NYS ELAP 198.6) by Bo Sun on 07/18/23
Asbestos Types: Other Material: Non-		10000	
FB-1 Locatio	223072612-04 on: Footing Bases - Black Percussive	Νο	NAD (by NYS ELAP 198.6) by Bo Sun on 07/18/23
Analyst Description: Blac Asbestos Types: Other Material: Non	k/Brown, Homogeneous, Non-Fibrous, E -fibrous 7%	3ulk Material	
GM-1 Locatio	223072612-05 on: Supply Duct Hallway Outside Chiller	<b>No</b> Room - Grey Mastic	NAD (by NYS ELAP 198.6) by Bo Sun on 07/18/23
Analyst Description: Gra Asbestos Types: Other Material: Non	y, Homogeneous, Non-Fibrous, Bulk Ma -fibrous 27.6%	terial	

430-1-0; Orangeburg Cook Chill Center

Client No. / HGA	Lab No.	<b>Asbestos Present</b>	<b>Total % Asbestos</b>
BF-1	223072612-06 Location: Chiller Black Foam Insulation - Black	<i>No</i> Foam Insulation	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos Type	on:Black, Homogeneous, Non-Fibrous, Bulk Ma es: al: Non-fibrous 100%	terial	
BF-2	223072612-07 Location: Chiller Black Foam Insulation - Black	<b>No</b> Foam Insulation	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos Type	on:Black, Homogeneous, Non-Fibrous, Bulk Ma es: al: Non-fibrous 100%	terial	
JF-1	223072612-08 Location: Exterior Chiller Pipe Joint Face - Gre	<b>No</b> y Caulk	NAD (by NYS ELAP 198.6) by Bo Sun on 07/18/23
Asbestos Typ	on: Gray, Homogeneous, Non-Fibrous, Bulk Mat es: al: Non-fibrous 7.2%	terial	
JF-2	223072612-09 Location: Exterior Chiller Pipe Joint Face - Gre	<i>No</i> ey Caulk	NAD (by NYS ELAP 198.6) by Bo Sun on 07/18/23
Asbestos Typ	on:Gray, Homogeneous, Non-Fibrous, Bulk Ma es: ial: Non-fibrous 7.3%	terial	
ECG-1	223072612-10 Location: Exterior Chiller Compressor Gasket	<b>Yes</b> - Black Gasket	19.7% (by NYS ELAP 198.6) by Bo Sun on 07/18/23
Asbestos Typ	ion:Black, Homogeneous, Non-Fibrous, Bulk Ma es: Chrysotile 19.7 % ial: Non-fibrous 29.6%	aterial	
ES-1	223072612-11 Location: Electrical Room Ceilings - White Fire	<b>No</b> eproofing Spray Foam	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos Typ	ion:Yellow, Homogeneous, Non-Fibrous, Bulk M nes: ial: Non-fibrous 100%	faterial	

### **PLM Bulk Asbestos Report**

430-1-0; Orangeburg Cook Chill Center

Client No. / HGA	Lab No.	Asbestos Present	<b>Total % Asbestos</b>
∃S-2 Locati	223072612-12 ion: Electrical Room Ceilings - White Fire	<b>No</b> proofing Spray Foam	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Analyst Description: Yel Asbestos Types: Other Material: No	llow, Homogeneous, Non-Fibrous, Bulk Ma n-fibrous 100%	aterial	
ES-3 Locat	223072612-13 Ion: Electrical Room Ceilings - White Fire	<b>No</b> proofing Spray Foam	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Analyst Description: Ye Asbestos Types: Other Material: No	llow, Homogeneous, Non-Fibrous, Bulk M n-fibrous 100%	aterial	
IM-1 Locat	223072612-14 tion: Interior Walls - Stone Masonry	Νο	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Analyst Description:Gr Asbestos Types: Other Material: No	ay, Homogeneous, Non-Fibrous, Cementi on-fibrous 100%	tious, Bulk Material	
PG-1 Local	223072612-15 tion: Chiller Pump Unit - Brown Gasket	Νο	NAD (by NYS ELAP 198.6) by Bo Sun on 07/18/23
Analyst Description:Br Asbestos Types: Other Material: No	own, Homogeneous, Non-Fibrous, Bulk M on-fibrous 22.4%	laterial	
PRG-1 Loca	223072612-16 tion: Chiller Pump Pipe Run Gasket - Bla	<b>No</b> ck Gasket	NAD (by NYS ELAP 198.6) by Bo Sun on 07/18/23
Analyst Description:Bl Asbestos Types: Other Material: No	ack, Homogeneous, Non-Fibrous, Bulk Ma on-fibrous 2.2%	aterial	
PRG-2 Loca	223072612-17 tion: Chiller Pump Pipe Run Gasket - Bla	<b>No</b> ck Gasket	NAD (by NYS ELAP 198.6) by Bo Sun on 07/18/23
Analyst Description:Bl Asbestos Types: Other Material: No	lack, Heterogeneous, Non-Fibrous, Bulk N on-fibrous 3.2%	faterial	

430-1-0; Orangeburg Cook Chill Center

Client No. / HG	A Lab No. A	sbestos Present	<b>Total % Asbestos</b>
WC-1	223072612-18 Location: Chiller Pump Pipe Run End Sections - White	<b>No</b> e Caulk	NAD (by NYS ELAP 198.6) by Bo Sun on 07/18/23
Asbestos Ty	otion: White, Homogeneous, Non-Fibrous, Bulk Material ypes: erial: Non-fibrous 9.5%		
WC-2	223072612-19 Location: Chiller Pump Pipe Run End Sections - Whit	<b>No</b> e Caulk	NAD (by NYS ELAP 198.6) by Bo Sun on 07/18/23
Asbestos T	ption:White, Homogeneous, Non-Fibrous, Bulk Material ypes: erial: Non-fibrous 11.1%		
PRE-1	223072612-20 Location: Chiller Exterior Pipe Runs - Yellow Insulatio	<b>No</b> n	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos T	ption: Yellow, Homogeneous, Fibrous, Bulk Material ypes: terial: Fibrous glass 95%, Non-fibrous 5%		
PRE-2	223072612-21 Location: Chiller Exterior Pipe Runs - Yellow Insulation	<b>No</b> on	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos T	iption: Yellow, Homogeneous, Fibrous, Bulk Material Types: terial: Fibrous glass 95%, Non-fibrous 5%		
PRE-3	223072612-22 Location: Chiller Exterior Pipe Runs - Yellow Insulation	<b>No</b> on	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos 7	iption: Yellow, Homogeneous, Fibrous, Bulk Material fypes: terial: Fibrous glass 95%, Non-fibrous 5%		
EIE-1	223072612-23 Location: Chiller Exterior Elbow Insulation - Yellow Ir	<b>No</b> sulation	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos	iption: Yellow, Homogeneous, Fibrous, Bulk Material Types: Iterial: Fibrous glass 97%, Non-fibrous 3%		

Other Material: Fibrous glass 97%, Non-fibrous 3%

### **PLM Bulk Asbestos Report**

430-1-0; Orangeburg Cook Chill Center

Client No. / HGA	Lab No.	<b>Asbestos Present</b>	<b>Total % Asbestos</b>
	223072612-24 iller Exterior Elbow Insulation - Yello		NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Analyst Description: Yellow, Ho Asbestos Types: Other Material: Fibrous gla	mogeneous, Fibrous, Bulk Material ass 97%, Non-fibrous 3%		
EIE-3 Location: Ch	223072612-25 iller Exterior Elbow Insulation - Yello	<b>No</b> ow Insulation	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Analyst Description: Yellow, Ho Asbestos Types: Other Material: Fibrous gl	mogeneous, Fibrous, Bulk Material ass 96%, Non-fibrous 4%		
WI-1 Location: Cł	223072612-26 iller Room Walls - Yellow Insulation	Νο	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Analyst Description: Yellow, Ho Asbestos Types: Other Material: Fibrous gl	omogeneous, Fibrous, Bulk Material ass 98%, Non-fibrous 2%		
WI-2 Location: Cl	223072612-27 hiller Room Walls - Yellow Insulation	No	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Analyst Description: Yellow, He Asbestos Types: Other Material: Fibrous g	omogeneous, Fibrous, Bulk Materia lass 98%, Non-fibrous 2%	l	
WJ-1 Location: Cl	223072612-28 hiller Room Walls - White Jacket	No	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos Types:	ver, Homogeneous, Fibrous, Bulk M 60%, Fibrous glass 20%, Non-fibr		
WJ-2 Location: C	223072612-29 hiller Room Walls - White Jacket	Νο	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos Types:	ver, Homogeneous, Fibrous, Bulk M 60%, Fibrous glass 20%, Non-fibr		

430-1-0; Orangeburg Cook Chill Center

Client No. / HGA	Lab No.	<b>Asbestos Present</b>	Total % Asbestos
	223072612-30 Location: Chiller Pump Unit - Yellow Insulation	Νο	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos Type	on: Yellow, Homogeneous, Fibrous, Bulk Material es: al: Fibrous glass 95%, Non-fibrous 5%		
PI-2	223072612-31 Location: Chiller Pump Unit - Yellow Insulation	No	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos Typ	on: Yellow, Homogeneous, Fibrous, Bulk Material es: ial: Fibrous glass 95%, Non-fibrous 5%		
PRB-1	223072612-32 Location: Chiller Pump Pipe Runs - Brown Insulati	<b>No</b> on	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos Typ	on: Brown, Homogeneous, Fibrous, Bulk Material es: ial: Fibrous glass 97%, Non-fibrous 3%		
PRB-2	223072612-33 Location: Chiller Pump Pipe Runs - Brown Insulat	<b>No</b> ion	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos Typ	ion: Brown, Homogeneous, Fibrous, Bulk Material bes: ial: Fibrous glass 95%, Non-fibrous 5%		
PRB-3	223072612-34 Location: Chiller Pump Pipe Runs - Brown Insulat	<b>No</b> ion	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos Typ	ion: Brown, Homogeneous, Fibrous, Bulk Material bes: rial: Fibrous glass 96%, Non-fibrous 4%		
PRY-1	223072612-35 Location: Chiller Pipe Runs - Yellow Insulation	Νο	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos Ty	tion: Yellow, Homogeneous, Fibrous, Bulk Material pes: rial: Fibrous glass 98%, Non-fibrous 2%		

Page 6 of 10

### **PLM Bulk Asbestos Report**

430-1-0; Orangeburg Cook Chill Center

Client No. / HGA	Lab No.	<b>Asbestos Present</b>	<b>Total % Asbestos</b>
PRY-2 Location	223072612-36 Chiller Pipe Runs - Yellow Insulation	No	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos Types:	r, Homogeneous, Fibrous, Bulk Material is glass 98%, Non-fibrous 2%		
	223072612-37 I: Chiller Pipe Runs - Yellow Insulation	No	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos Types:	v, Homogeneous, Fibrous, Bulk Material us glass 98%, Non-fibrous 2%		
HJ-1	223072612-38 n: Chiller Pipe Runs Solid Jacket - White F	<b>No</b> Plastic	NAD (by NYS ELAP 198.6) by Bo Sun on 07/18/23
Analyst Description: White Asbestos Types: Other Material: Non-f	e, Homogeneous, Non-Fibrous, Bulk Mater ïbrous 2.9%	rial	
HJ-2 Location	223072612-39 n: Chiller Pipe Runs Solid Jacket - White F	<b>No</b> Plastic	NAD (by NYS ELAP 198.6) by Bo Sun on 07/18/23
Analyst Description: White Asbestos Types: Other Material: Non-1	e, Homogeneous, Non-Fibrous, Bulk Mate fibrous 1.7%	rial	
PJ-1 Locatio	223072612-40 n: Pump Unit - White Jacket	Νο	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos Types:	e/Silver, Homogeneous, Fibrous, Bulk Mat ous glass 80%, Non-fibrous 20%	terial	
PJ-2 Locatio	223072612-41 n: Pump Unit - White Jacket	Νο	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos Types:	e/Silver, Homogeneous, Fibrous, Bulk Ma Ilose 65%, Fibrous glass 15%, Non-fibro		

430-1-0; Orangeburg Cook Chill Center

Client No. / HGA	Lab No.	<b>Asbestos Present</b>	<b>Total % Asbestos</b>
	223072612-42 tion: Chiller Pipe Runs Solid Jacket - White		NAD (by NYS ELAP 198.6) by Bo Sun on 07/18/23
Analyst Description: W Asbestos Types: Other Material: No	hite, Homogeneous, Non-Fibrous, Bulk Mat on-fibrous 9.9%	erial	
	223072612-43 Ition: Chiller Pipe Runs Solid Jacket - White		NAD (by NYS ELAP 198.6) by Bo Sun on 07/18/23
Analyst Description:Bl Asbestos Types: Other Material: N	lack, Homogeneous, Non-Fibrous, Bulk Mat on-fibrous 9.9%	erial	
BR-1 Loca	223072612-44 ation: Backflow Pipe Runs - Yellow Insulatio	<b>No</b> n	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos Types:	ellow, Hornogeneous, Fibrous, Bulk Materia ibrous glass 95%, Non-fibrous 5%	I .	
BR-2 Loca	223072612-45 ation: Backflow Pipe Runs - Yellow Insulatio	No	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos Types:	'ellow, Homogeneous, Fibrous, Bulk Materia 'ibrous glass 95%, Non-fibrous 5%	ıl	
BR-3	223072612-46 ation: Backflow Pipe Runs - Yellow Insulatio	<b>No</b> on	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos Types:	′ellow, Homogeneous, Fibrous, Bulk Materia Fibrous glass 95%, Non-fibrous 5%	ai	
BFJ-1 Loc	223072612-47 ation: Backflow Pipe Runs - Green Jacket	No	NAD (by NYS ELAP 198.6) by Bo Sun on 07/18/23
Asbestos Types:	Green, Homogeneous, Non-Fibrous, Bulk M Non-fibrous 37.1%	aterial	

### **PLM Bulk Asbestos Report**

430-1-0; Orangeburg Cook Chill Center

Client No. / HGA	Lab No.	<b>Asbestos Present</b>	<b>Total % Asbestos</b>
	223072612-48 cation: Backflow Pipe Runs - Green Jacket	Νο	NAD (by NYS ELAP 198.6) by Bo Sun on 07/18/23
Asbestos Types:	Green, Homogeneous, Non-Fibrous, Bulk Mat Non-fibrous 33.3%	terial	
El-1 Lo	223072612-49 cation: Chiller Pump Pipe Elbows - Orange In	<b>No</b> sulation	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos Types:	Orange, Homogeneous, Fibrous, Bulk Materia Fibrous glass 97%, Non-fibrous 3%	al	
El-2 Lo	223072612-50 cation: Chiller Pump Pipe Elbows - Orange In	<b>No</b> Isulation	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos Types:	Orange, Homogeneous, Fibrous, Bulk Materia Fibrous glass 95%, Non-fibrous 5%	al	
El-3 Lo	223072612-51 cation: Chiller Pump Pipe Elbows - Orange Ir	<b>No</b> nsulation	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos Types:	Orange, Homogeneous, Fibrous, Bulk Materi Fibrous glass 95%, Non-fibrous 5%	al	
BC-1	223072612-52 ocation: Chiller Pump Condenser Lines - Blac	<b>No</b> k Foam Insulation	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos Types	:Black, Homogeneous, Non-Fibrous, Bulk Ma : Non-fibrous 100%	terial	01101/10/20
BC-2	223072612-53 ocation: Chiller Pump Condenser Lines - Blac	<b>No</b> k Foam Insulation	NAD (by NYS ELAP 198.1) by Bo Sun on 07/18/23
Asbestos Types	: Black, Homogeneous, Non-Fibrous, Bulk Ma : : Non-fibrous 100%	terial	

AmeriSci Job #: 223072612 Client Name: Response Labs

### PLM Bulk Asbestos Report

430-1-0; Orangeburg Cook Chill Center

Client No. / HGA	Lab No.	Asbestos Present	<b>Total % Asbestos</b>
EP-1 Loo	223072612-54 cation: Underground Electric Line Covering - E	<b>No</b> Black Putty	NAD (by NYS ELAP 198.6) by Bo Sun on 07/18/23
Asbestos Types:	Black, Homogeneous, Non-Fibrous, Bulk Mate Non-fibrous 28.7%	erial	
EP-2 Lo	223072612-55 cation: Underground Electric Line Covering - I	<b>No</b> Black Putty	NAD (by NYS ELAP 198.6) by Bo Sun on 07/18/23
Asbestos Types:	Black, Homogeneous, Non-Fibrous, Bulk Mate Non-fibrous 31.4%	erial	

### **Reporting Notes:**

Analyzed by: Bo Sun Date: 7/18/2023

Bosm

Reviewed by: Feyza Gungor

Feyf

\*NAD/NSD =no asbestos detected; NA =not analyzed; NA/PS=not analyzed/positive stop, (SOF-V) = Sprayed On Fireproofing containing Vermiculite; (SM-V) = Surfacing Material containing Vermiculite; PLM Bulk Asbestos Analysis using Motic, Model BA310 Pol Scope, Microscope, Serial #: 1190000538, by Appd E to Subpt E, 40 CFR 763 quantified by either CVES or 400 pt ct as noted for each analysis (NVLAP 200546-0), ELAP PLM Method 198.1 for NY friable samples, which includes the identification and quantitation of vermiculite, or ELAP 198.6 for NOB samples, or EPA 400 pt ct by EPA 600-M4-82-020 (NY ELAP Lab 11480); Note:PLM is not consistently reliable in detecting asbestos in floor coverings and similar non-friable organically bound materials. NAD or Trace results by PLM are inconclusive, TEM is currently the only method that can be used to determine if this material can be considered or treated as non asbestos-containing in NY State (also see EPA Advisory for floor tile, FR 59,146,38970,8/1/94) National Institute of Standards and Technology Accreditation requirements mandate that this report must not be reproduced except in full without the approval of the lab.This PLM report relates ONLY to the items tested. RI Cert AAL-094, CT Cert PH-0186, Mass Cert AA000054, NJ Lab ID #NY031.

END OF REPORT\_\_\_\_\_

Page 1 of 4

AmeriSci Job #: 223072612 Client Name: Response Labs

# Table I Summary of Bulk Asbestos Analysis Results 430-1-0; Orangeburg Cook Chill Center

|       | 6                            |   |  |   |   |   |   |   |   |   |  |   
   
   
   |   
   
  |  |   |   
  |  |   |   
   |   
   |   
   |  |  |   |   
   |   |  |  |  |  |  |
|-------|------------------------------|---|--|---|---|---|---|---|---|---|--
--
--
---
--
--
--|--|---|--|--
---
--
---|---
--
---|--|--|---|---
---|--|--|--|--|--|
| NAD   | 0                            | NAU   | (  | NAL   |   | NAU   | -   | NAD   |   | NA  |  | NA  
   
   
   |   
   
  | NAD  | 1   | NAD   
  |  | AN  |   
   | NA  
   |   
   | NA   |  | AN1   |   
   | NA  |  | NAU  |  | NAU  |  |
| NAD   |                              | NAD   |  | NAD   |   | NAD   |   | DVN   |   | NAD   |  | NAD   
   
   
   |   
   
  | NAD  |   | NAD   
  |  | Chrysottle 19.7   |   
   | NAD   
   |   
   | NAD  |  | NAD   | | | | | | | | | |
   | NAD   |  | NAD  |  | NAD  |  |
| 21.0  |                              | 21.9  |  | 1.2   |   | 7.0   |   | 27.6  |   | -   |  |   
   
   
   |   
   
  | 7.2  |   | 7.3   
  |  | 29.6  |   
   | I   
   |   
   | Mana   |  | 1   |   
   | l   |  | 22.4   | - 1000 N 1000 N  | 2.2  |  |
| 1.2   |                              | 0.5   |  | 22.4  |   | 18.4  |   | 21.8  |   | 1   |  | I   
   
   
   |   
   
  | 41.7   |   | 40.5  
  |  | 13.1  |   
   | I   
   |   
   |  |  | I   |   
   | I   |  | 12.5   |  | 4.9  |  |
| 6.77  |                              | 77.6  |  | 76.4  |   | 74.6  |   | 50.6  |   | I   |  | I   
   
   
   |   
   
  | 51.1   |   | 52.2  
  |  | 37.6  |   
   | ł   
   |   
   |  |  |   |   
   | ł   |  | 65.1   |  | 92.9   |  |
| 0.113 |                              | 0.076   | ting   | 0.143   |   | 0.217   |   | 0.106   | 1 - Grey Mastic   | 1   | n Insulation   | ł   
   
   
   | n Insulation  
   
  | 0.269  | Jk.   | 0.213   
  | ¥  | 0.038   | k Gasket  
   | I   
   | ing Spray Foam  
   | ļ  | ing Spray Foam   |   | ing Spray Foam  
   |   |  | 0.120  |  | 0.192  | sket   |
|       | e Coating                    |   | ack Pipe Coa   |   | sive  |   | ssive   |   | e Chiller Roon  |   | 1 - Black Foar   |   
   
   
   | h - Black Foar  
   
  |  | ce - Grey Cat   |   
  | ce - Grey Cai  |   | Gasket - Blac   
   |   
   | hite Fireproof  
   |  | hite Fireproof   |   | hite Fireproot  
   |   | Z  |  | asket  |  | cet - Black Ga   |
| DP-1  | Double Wall Pipe - Black Pip | DP-2  | Double Wall Pipe Supply - Bl   | FR-1  | Footing Riser - Black Percus  | -<br>1-<br>1-<br>1-<br>1-<br>1-<br>1-<br>1-<br>1-<br>1-<br>1-<br>1-<br>1-<br>1-   | Footing Bases - Black Percu:  | GM-1  | Supply Duct Hallway Outside   | BF-1  | Chiller Black Foam Insulation  | BF-2  
   
   
   | Chiller Black Foam Insulation   
   
  | JF-1   | Exterior Chiller Pipe Joint Fa  | JF-2  
  | Exterior Chiller Pipe Joint Fa   | ECG-1   | Exterior Chiller Compressor   
   | ES-1  
   | Electrical Room Ceilings - W  
   | ES-2   | Electrical Room Cellings - W   | ES-3  | Electrical Room Ceilings - W  
   | 1M-1  | Interior Walls - Stone Mason   | PG-1   | Chiller Pump Unit - Brown G  | PRG-1  | Location: Chiller Pump Pipe Run Gasket - Black Gasket  |
| 01    | Location:                    | 02  | Location:  | 03  | Location:   | 04  | Location:   | 05  | Location:   | 06  | Location:  | 07  
   
   
   | Location:   
   
  | 08   | Location:   | 60  
  | Location:  | <del>6</del>  | Location:   
   | <del>1.</del>   
   | Location:   
   | 12   | Location:  | 13  | Location:   
   | 14  | Location:  | 15   | Location:  | 16   | Location:  |
|       | DP-1 0.113 77.9 1.2 21.0     | 01: Double Wall Pipe - Black Pipe Coating 0.113 77.9 1.2 21.0 NAD | DP-1         0.113         77.9         1.2         21.0         NAD           on:         Double Wall Pipe - Black Pipe Coating         0.113         77.6         0.5         21.9         NAD | DP-1         0.113         77.9         1.2         21.0         NAD           on: Double Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on: Double Wall Pipe Supply - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD | DP-1         0.113         77.9         1.2         21.0         NAD           on:         Double Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Double Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Double Wall Pipe Supply - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD | DP-1         0.113         77.9         1.2         21.0         NAD           on:         Double Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Dp-2         0.076         77.6         0.5         21.9         NAD           on:         Double Wall Pipe Supply - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FR-1         0.143         76.4         22.4         1.2         NAD | DP-1         0.113         77.9         1.2         21.0         NAD           on:         Double Wall Pipe Elack Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Dp-2         0.076         77.6         0.5         21.9         NAD           on:         Double Wall Pipe Supply - Black Pipe Coating         77.6         0.5         21.9         NAD           on:         Double Wall Pipe Supply - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FR-1         0.143         76.4         22.4         1.2         NAD           on:         Footing Riser - Black Percussive         0.217         74.6         18.4         7.0         NAD | DP-1         0.113         77.9         1.2         21.0         NAD           on:         Dp-2         0.076         77.6         0.5         21.9         NAD           on:         Dp-2         0.076         77.6         0.5         21.9         NAD           on:         Double Wall Pipe Supply - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Double Wall Pipe Supply - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FR-1         0.143         76.4         22.4         1.2         NAD           on:         Footing Riser - Black Percussive         0.217         74.6         18.4         7.0         NAD           on:         Footing Bases - Black Percussive         0.217         74.6         18.4         7.0         NAD | DP-1         0.113         77.9         1.2         21.0         NAD           on:         Dp-2         0.113         77.5         0.5         21.9         NAD           on:         Dp-2         0.076         77.6         0.5         21.9         NAD           on:         Dp-1         0.076         77.6         0.5         21.9         NAD           on:         Double Wall Pipe Supply - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FR-1         0.143         76.4         22.4         1.2         NAD           on:         Footing Riser - Black Percussive         0.143         76.4         22.4         7.0         NAD           on:         Footing Riser - Black Percussive         0.217         74.6         18.4         7.0         NAD           on:         Footing Bases - Black Percussive         0.106         50.6         21.8         27.6         MAD | DP-1         0.113         77.9         1.2         21.0         NAD           on:         Double Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         DP-2         0.076         77.6         0.5         21.9         NAD           on:         Double Wall Pipe Supply - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Double Wall Pipe Supply - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FR-1         0.143         76.4         22.4         1.2         NAD           on:         Footing Riser - Black Percussive         0.217         74.6         18.4         7.0         NAD           on:         FD-1         0.217         74.6         18.4         7.0         NAD           on:         Footing Bases - Black Percussive         0.106         50.6         21.8         7.0         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         0.106         50.6         21.8         27.6         NAD | DP-1         0.113         77.9         1.2         21.0         NAD           on:         Double Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Dp-2         0.076         77.6         0.5         21.9         NAD           on:         Double Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Double Wall Pipe Supply - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FR-1         0.143         76.4         22.4         1.2         NAD           on:         Footing Riser - Black Percussive         0.217         74.6         18.4         7.0         NAD           on:         FB-1         0.217         74.6         18.4         7.0         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         0.106         50.6         21.8         27.6         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         -         -         -         -         - | DP-1         0.113         77.9         1.2         21.0         NAD           on:         Duble Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.3         NAD           on:         Duble Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.3         NAD           on:         Duble Wall Pipe Supply - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FR-1         0.143         76.4         22.4         1.2         NAD           on:         Footing Riser - Black Percussive         0.217         74.6         18.4         7.0         NAD           on:         Footing Bases - Black Percussive         0.217         74.6         18.4         7.0         NAD           on:         Footing Bases - Black Percussive         0.106         50.6         21.8         27.6         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         -         -         -         -         -         NAD           on:         BF-1         -         -         -         -         -         -         NAD           on:         Coting Basese - Black Foram Insulation <th>DP-1         77.9         1.2         21.0         NAD           on:         Double Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Duble Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Duble Wall Pipe Supply - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FR-1         0.143         76.4         22.4         1.2         NAD           on:         Footing Riser - Black Percussive         0.217         74.6         18.4         7.0         NAD           on:         FD-1         0.217         74.6         18.4         7.0         NAD           on:         FD-1         0.217         74.6         18.4         7.0         NAD           on:         FD-1         0.217         74.6         21.8         27.6         NAD           on:         Conting Bases - Black Percussive         0.106         50.6         21.8         27.6         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         -         -         -         -         NAD      <tr< th=""><th>DP-1         0.113         77.9         1.2         21.0         NAD           on:         Dubbe Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Dubbe Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Dubbe Wall Pipe Supply - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FR-1         0.143         76.4         22.4         1.2         NAD           on:         Footing Riser - Black Percussive         0.143         76.4         22.4         1.2         NAD           on:         FB-1         0.217         74.6         18.4         7.0         NAD           on:         FB-1         0.217         74.6         18.4         7.0         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         0.106         50.6         21.8         27.6         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         -         -         -         -         -         -         -         NAD           on:         Supty Duct Hallway Outside Chiller R</th><th>Interface         DP-1         0.113         77.9         1.2         21.0         NAD           on:        
Duble Wall Pipe - Black Pipe Coating         0.076         77.8         0.5         21.9         NAD           on:         Duble Wall Pipe Supply - Black Pipe Coating         0.076         77.8         0.5         21.9         NAD           on:         Duble Wall Pipe Supply - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         Fb-1         0.143         76.4         22.4         1.2         NAD           on:         Fb-1         0.143         76.4         22.4         1.2         NAD           on:         Fb-1         0.143         7.4.6         18.4         7.0         NAD           on:         Fb-1         0.106         50.6         21.8         27.6         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         -         -         -         -         -         -         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         -         -         -         -         -         -         -         -         -         -         -</th><th>DP-1         0.113         77.9         1.2         21.0         NAD           on:         DP-2         0.016         77.6         0.5         21.9         NAD           on:         DP-2         0.076         77.6         0.5         21.9         NAD           on:         DP-2         0.076         77.6         0.5         21.9         NAD           on:         Double Wall Pipe Suppy - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FB-1         0.143         76.4         22.4         1.2         NAD           on:         FB-1         0.217         74.6         18.4         7.0         NAD           on:         FB-1         0.217         74.6         18.4         7.0         NAD           on:         FB-1         0.217         74.6         18.4         7.0         NAD           on:         Suphy Duct Halway Outside Chiller Room - Grey Mastic         0.106         50.6         21.8         27.6         NAD           on:         Suphy Duct Halway Outside Chiller Room - Grey Mastic         -         -         -         -         -         -         -         NAD</th><th>mr.         Dp-1         0.113         77.9         1.2         21.0         NAD           on:         Dp-2         0.076         77.5         0.5         21.9         NAD           on:         Dp-2         0.076         77.5         0.5         21.9         NAD           on:         Dubte Wall Pipe - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FR-1         0.143         76.4         22.4         1.2         NAD           on:         Footing Riser - Black Percussive         0.143         76.4         22.4         1.2         NAD           on:         Footing Riser - Black Percussive         0.217         74.6         18.4         7.0         NAD           on:         Footing Bases - Black Percussive         0.106         50.6         21.8         27.6         NAD           on:         Chiller Black Percussive         0.106         50.6         21.8         27.6         NAD           on:         Chiller Black Foarn Insulation         0.106         50.6         21.8         27.6         NAD           on:         Chiller Black Foarn Insulation         0.106         50.6         21.8         27.6</th><th>mth         DP-1         0.113         77.9         1.2         21.0         NAD           on:         DD-2         0.076         77.6         0.5         21.9         NAD           on:         DD-2         0.076         77.6         0.5         21.9         NAD           on:         Double Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Double Wall Pipe Supply - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FR-1         0.113         76.4         22.4         1.2         NAD           on:         Footing Riser - Black Percussive         0.116         50.6         21.8         7.0         NAD           on:         Footing Riser - Black Percussive         0.106         50.6         21.8         27.6         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         -         -         -         -         -         -         -         -         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         -         -         -         -         -         -         -         -</th><th>mr.         DP-1         0.113         77.9         1.2         21.0         MAD           on:         Duble Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Duble Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Duble Wall Pipe - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FB-1         0.106         50.6         21.8         27.6         NAD           on:         Supply Duct Hallway Outside Chiller Room - Gray Mastic         <math></math> <math></math> <math></math> <math> -</math>           on:         Supply Duct Hallway Outside Chiller Room - Black Foam Insulation         <math></math> <math>    -</math>           on:         Chiller Black Foam Insulation         <math>-</math> <td< th=""><th>on:         DP-1         0.113         77.9         1.2         21.0         NAD           on:         DP-1         0.076         77.8         0.5         21.3         NAD           on:         DP-2         0.076         77.8         0.5         21.3         NAD           on:         Duble Wall Pipe - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FR-1         0.143         76.4         22.4         1.2         NAD           on:         Footing Rise - Black Percussive         0.217         74.6         18.4         7.0         NAD           on:         Footing Bases - Black Percussive         0.2106         50.6         21.8         27.6         NAD           on:         Conting Bases - Black Foram Insulation         0.106         50.6         21.8         27.6         NAD           on:         Conting Bases - Black Foram Insulation         -         -         -         -         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         -         -         -         -         NAD           on:         Chiller Black Foram Insulation         Black Foram Insulation         -</th><th>on:         DP-1         0.113         77.9         1.2         21.0         NAD           on:         DP-1         0.076         77.6         0.5         21.9         NAD           on:         DP-2         0.076         77.6         0.5         21.9         NAD           on:         Druble Wait Pipe Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Foulde Wait Pipe Supply - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         Footing Riser - Black Percussive         0.217         74.6         18.4         7.0         NAD           on:         Footing Bases - Black Percussive         0.217         74.6         18.4         7.0         NAD           on:         Footing Bases - Black Percussive         0.106         50.6         21.8         27.6         NAD           on:         Childer Black Percussive         0.106         50.6         21.8         27.6         NAD           on:         Childer Black Percussive         0.106         50.6         21.8         27.6         NAD           on:         Childer Black Percussive         0.106         50.6         21.8<th>DP-1         DP-1         0.113         77.9         1.2         2.1.0         NMD           on:         Duble Well Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NMD           on:         Duble Well Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NMD           on:         Fording Riser - Black Pipe Coating         0.143         76.4         22.4         1.2         NMD           on:         Fording Riser - Black Percussive         0.217         74.6         18.4         7.0         NMD           on:         FE-1         0.217         74.6         18.4         7.0         NMD           on:         Ferid         0.217         74.6         18.4         7.0         NMD           on:         Ferid         0.106         50.6         21.8         27.6         NMD           on:         Chiller Black Foarm Insulation         Elser, Paranterosition         0.103         51.1         41.7         7.2         MD           on:         Chiller Black Foarm Insulation         Black Foarm Insulation         0.203         51.1         41.7         7.2         MD           on:         Elstrich Chiller Flace - Grey Caulk</th><th>Onlo bert         DP-1         0.113         77.9         1.2         21.0         NAD           on:         Dh-2         0.076         77.6         0.5         21.9         MAD           on:         Dh-2         0.076         77.6         0.5         21.9         MAD           on:         Duble Wall Pipe Stepty - Black Pipe Coatting         0.143         76.4         22.4         1.2         MAD           on:         Fould Riser - Black Percussive         0.143         76.4         22.4         1.2         MAD           on:         Fould Riser - Black Percussive         0.106         50.6         21.8         7.0         MAD           on:         Suppi Jouct Hallway Outside Chiller Room - Gray Mastic         0.106         50.6         21.8         27.6         MAD           on:         Chiller Black Foam Insulation         Black Foam Insulation         Diack Hallway Outside Chiller Room - Gray Mastic         -         -         -
        -         -         -         NAD           on:         Chiller Black Foam Insulation         Black Foam Insulation         Black Foam Insulation         Black Foam Insulation         -         -         -         -         -         -         -         NAD         -</th><th>mon         DP-1         0.113         77.9         1.2         2.10         MAD           on:         Druble Wall Pipe - Black Pipe Coating         0.143         7.6         0.5         2.19         MAD           or:         Druble Wall Pipe Supty- Black Pipe Coating         0.143         7.6         0.5         2.19         MAD           or:         Druble Wall Pipe Supty- Black Pipe Coating         0.143         7.6         0.5         2.19         MAD           or:         Fould Riser - Black Piccussive         0.143         7.6         2.18         7.0         MAD           or:         Fould Blase - Black Piccussive         0.106         5.0.6         2.1.8         2.7.6         MAD           or:         Coling Blase - Black Piercussive         0.106         5.0.6         2.1.8         2.7.6         MAD           or:         Cultine Black Fram Insulation         Black Fram Insulation - Black Fram Insulation         Black Fram Insulation         Black Fram Insulation         Black Fram Insulation         MAD           or:         Chiller Black Fram Insulation         MAD           or:         Chiller Black Fram Insulation         Black Fram In</th><th>mstress         <math>0.113</math> <math>7.79</math> <math>1.2</math> <math>2.10</math>         MsD           on:         <math>0.016</math> <math>7.15</math> <math>0.5</math> <math>2.19</math>         NsD           on:         <math>0.016</math> <math>7.15</math> <math>0.5</math> <math>2.19</math>         NsD           on:         <math>0.016</math> <math>7.15</math> <math>0.5</math> <math>2.19</math>         NsD           on:         <math>0.016</math> <math>8.05</math> <math>2.14</math> <math>1.2</math>         NsD           on:         <math>0.0106</math> <math>50.6</math> <math>2.1.8</math> <math>2.7.6</math>         NsD           on:         <math>0.0106</math> <math>50.6</math> <math>2.1.8</math> <math>7.7</math>         NsD           on:         <math>0.0106</math> <math>50.6</math> <math>51.1</math> <math>7.2</math>         NsD           on:         <math>0.0106</math> <math>50.6</math> <math>51.8</math> <math>7.2</math></th><th>Only Evention         0.113         77.9         1.2         2.1.0         NMD           on:         Dub-I         0.076         77.6         0.5         21.9         NMD           on:         Duble Wall Pipe Supty - Black Pipe Coating         0.076         77.6         0.5         21.9         NMD           on:         Duble Wall Pipe Supty - Black Pipe Coating         0.143         76.4         22.4         1.2         NMD           on:         Fouring Riser - Black Procussive         0.113         74.6         18.4         7.0         NMD           on:         Fouring Blace - Black Procussive         0.106         50.6         2.18         27.6         NMD           on:         Gooting Blace - Black Procussive         0.106         50.6         2.18         27.6         NMD           on:         Suppi Duct Halkway Outside Chiller Room - Gray Mastic         -         -         -         -         NMD           on:         Gupt Duct Halkway Outside Chiller Room - Gray Mastic         -         -         -         NMD           on:         Chiller Black Foram Insulation         Bf-1         7.1         7.2         NMD           on:         Chiller Black Foram Insulation         Dist         0.28</th><th>Distribution         <math>0.113</math> <math>77.3</math> <math>1.2</math> <math>2.10</math>         NMD           on:         Double Wall Pipe Stophy- Black Pipe Coating         <math>0.076</math> <math>77.6</math> <math>0.5</math> <math>21.9</math>         NAD           on:         Double Wall Pipe Stophy- Black Pipe Coating         <math>0.076</math> <math>77.6</math> <math>0.5</math> <math>21.9</math>         NAD           on:         Fooling Rest-Allock Piecoating         <math>0.076</math> <math>77.6</math> <math>0.23</math> <math>76.4</math> <math>22.4</math> <math>1.2</math>         NAD           on:         Fooling Rest-Slack Piecoasive         <math>0.237</math> <math>74.8</math> <math>78.4</math> <math>7.0</math>         NAD           on:         Fooling Rest-Slack Piecoasive         <math>0.237</math> <math>74.8</math> <math>78.4</math> <math>7.0</math>         NAD           on:         Fooling Rest-Flank Piecoasive         <math>0.217</math> <math>74.8</math> <math>78.4</math> <math>7.0</math>         NAD           on:         Supply Uset Halwy Outside Chiller Room - Gray Masic         <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math>           on:         Chiller Black Fean Insulation         BE-1         <math>-1</math> <math>7.0</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math></th><th>Outble Wall Pipe Supply Black Type Coaling         0.113         77.9         1.2         21.0         NAD           or:         Double Wall Pipe Supply Black Type Coaling         0.76         77.6         0.5         21.9         NAD           or:         Double Wall Pipe Supply Black Type Coaling         0.76         77.6         0.5         21.9         NAD           or:         Double Wall Pipe Supply Black Type Coaling         0.143         76.4         22.4         1.2         NAD           or:         Ferition         0.217         74.6         18.4         7.0         NAD           or:         Footing Fases - Black Percussive         0.217         74.6         18.4         7.0         NAD           or:         Ferition         0.217         74.6         18.4         7.0         NAD           or:         Chiller Plack Pean Insulation         0.217         74.6         19.4         7.0         NAD           or:         Chiller Black Fean Insulation         0.306         51.1         41.7         7.2         NAD           or:         Chiller Black Fean Insulation         0.233         57.6         7.3         NAD           or:         Chiller Black Fean Insulation         0.233         7.1&lt;</th><th>Only for the field of the field o</th><th>Dp-1         <math>0.13</math> <math>7.5</math> <math>1.2</math> <math>2.10</math>         NAD           or:         Dudde Wall Pipe Stapty - Black Pipe Coatting         <math>0.75</math> <math>7.5</math> <math>0.5</math> <math>2.19</math>         NAD           or:         Double Wall Pipe Stapty - Black Pipe Coatting         <math>0.73</math> <math>7.6</math> <math>0.5</math> <math>2.19</math>         NAD           or:         FR.1         <math>0.143</math> <math>76.4</math> <math>2.2.4</math> <math>1.2</math>         NAD           or:         Fooling Riser - Black Pincussive         <math>0.143</math> <math>76.4</math> <math>2.2.4</math> <math>1.2</math>         NAD           or:         FeA1         <math>0.217</math> <math>7.4.6</math> <math>18.4</math> <math>7.0</math>         NAD           or:         Fooling Riser - Black Forcussive         <math>0.106</math> <math>50.6</math> <math>2.18</math> <math>2.76</math>         NAD           or:         Fooling Riser - Black Foorm Isudition - Black Foorm Isudit</th><th>Up-1         Up-1         0.113         71.9         1.2         2.10         NAD         1           or:         Double Wail Pipe Suppir - Black Pipe Coating         0.076         77.8         0.5         2.19         NAD         1           or:         Double Wail Pipe Suppir - Black Pipe Coating         0.143         77.4         0.5         2.19         NAD         1           or:         Fooling Rise - Black Pipe Coating         7.4         2.4         1.2         NAD         1           or:         Fooling Rise - Black Percussive         0.143         7.4         2.4         7.0         NAD         1           or:         Fooling Rise - Black Percussive         0.13         7.4         2.18         7.0         NAD           or:         Fooling Rise - Black Percussive         0.105         5.18         2.18         7.0         NAD           or:         Fooling Black Form Insulation - Black Foam Insulation         -         -         -         -         -         -         NAD           or:         Chiler Black Foam Insulation - Black Foam Insulation         -         -         -         -         -         -         NAD           or:         Exterior Chiler Black Foam Insulation - Black Coating</th></th></td<></th></tr<></th> | DP-1         77.9         1.2         21.0         NAD           on:         Double Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Duble Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Duble Wall Pipe Supply - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FR-1         0.143         76.4         22.4         1.2         NAD           on:         Footing Riser - Black Percussive         0.217         74.6         18.4         7.0         NAD           on:         FD-1         0.217         74.6         18.4         7.0         NAD           on:         FD-1         0.217         74.6         18.4         7.0         NAD           on:         FD-1         0.217         74.6         21.8         27.6         NAD           on:         Conting Bases - Black Percussive         0.106         50.6         21.8         27.6         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         -         -         -         -         NAD <tr< th=""><th>DP-1         0.113         77.9         1.2         21.0         NAD           on:         Dubbe Wall Pipe - Black Pipe Coating         0.076         77.6       
 0.5         21.9         NAD           on:         Dubbe Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Dubbe Wall Pipe Supply - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FR-1         0.143         76.4         22.4         1.2         NAD           on:         Footing Riser - Black Percussive         0.143         76.4         22.4         1.2         NAD           on:         FB-1         0.217         74.6         18.4         7.0         NAD           on:         FB-1         0.217         74.6         18.4         7.0         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         0.106         50.6         21.8         27.6         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         -         -         -         -         -         -         -         NAD           on:         Supty Duct Hallway Outside Chiller R</th><th>Interface         DP-1         0.113         77.9         1.2         21.0         NAD           on:         Duble Wall Pipe - Black Pipe Coating         0.076         77.8         0.5         21.9         NAD           on:         Duble Wall Pipe Supply - Black Pipe Coating         0.076         77.8         0.5         21.9         NAD           on:         Duble Wall Pipe Supply - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         Fb-1         0.143         76.4         22.4         1.2         NAD           on:         Fb-1         0.143         76.4         22.4         1.2         NAD           on:         Fb-1         0.143         7.4.6         18.4         7.0         NAD           on:         Fb-1         0.106         50.6         21.8         27.6         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         -         -         -         -         -         -         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         -         -         -         -         -         -         -         -         -         -         -</th><th>DP-1         0.113         77.9         1.2         21.0         NAD           on:         DP-2         0.016         77.6         0.5         21.9         NAD           on:         DP-2         0.076         77.6         0.5         21.9         NAD           on:         DP-2         0.076         77.6         0.5         21.9         NAD           on:         Double Wall Pipe Suppy - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FB-1         0.143         76.4         22.4         1.2         NAD           on:         FB-1         0.217         74.6         18.4         7.0         NAD           on:         FB-1         0.217         74.6         18.4         7.0         NAD           on:         FB-1         0.217         74.6         18.4         7.0         NAD           on:         Suphy Duct Halway Outside Chiller Room - Grey Mastic         0.106         50.6         21.8         27.6         NAD           on:         Suphy Duct Halway Outside Chiller Room - Grey Mastic         -         -         -         -         -         -         -         NAD</th><th>mr.         Dp-1         0.113         77.9         1.2         21.0         NAD           on:         Dp-2         0.076         77.5         0.5         21.9         NAD           on:         Dp-2         0.076         77.5         0.5         21.9         NAD           on:         Dubte Wall Pipe - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FR-1         0.143         76.4         22.4         1.2         NAD           on:         Footing Riser - Black Percussive         0.143         76.4         22.4         1.2         NAD           on:         Footing Riser - Black Percussive         0.217         74.6         18.4         7.0         NAD           on:         Footing Bases - Black Percussive         0.106         50.6         21.8         27.6         NAD           on:         Chiller Black Percussive         0.106         50.6         21.8         27.6         NAD           on:         Chiller Black Foarn Insulation         0.106         50.6         21.8         27.6         NAD           on:         Chiller Black Foarn Insulation         0.106         50.6         21.8         27.6</th><th>mth         DP-1         0.113         77.9         1.2         21.0         NAD           on:         DD-2         0.076         77.6         0.5         21.9         NAD           on:         DD-2         0.076         77.6         0.5         21.9         NAD           on:         Double Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Double Wall Pipe Supply - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FR-1         0.113         76.4         22.4         1.2         NAD           on:         Footing Riser - Black Percussive         0.116         50.6         21.8         7.0         NAD           on:         Footing Riser - Black Percussive         0.106         50.6         21.8         27.6         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         -         -         -         -         -         -         -         -         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         -         -         -         -         -         -         -         -</th><th>mr.         DP-1         0.113         77.9         1.2         21.0         MAD           on:         Duble Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Duble Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Duble Wall Pipe - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FB-1         0.106         50.6         21.8         27.6         NAD           on:         Supply Duct Hallway Outside Chiller Room - Gray Mastic         <math></math> <math></math> <math></math> <math> -</math>           on:         Supply Duct Hallway Outside Chiller Room - Black Foam Insulation         <math></math> <math>    -</math>           on:         Chiller Black Foam Insulation         <math>-</math> <td< th=""><th>on:         DP-1         0.113         77.9         1.2         21.0         NAD           on:         DP-1         0.076         77.8         0.5         21.3         NAD           on:         DP-2         0.076         77.8         0.5         21.3         NAD           on:         Duble Wall Pipe - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FR-1         0.143         76.4         22.4         1.2         NAD           on:         Footing Rise - Black Percussive         0.217         74.6         18.4         7.0         NAD           on:         Footing Bases - Black Percussive         0.2106         50.6         21.8         27.6         NAD           on:         Conting Bases - Black Foram Insulation         0.106         50.6         21.8         27.6         NAD           on:         Conting Bases - Black Foram Insulation         -         -         -         -         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         -         -         -         -         NAD           on:         Chiller Black Foram Insulation         Black Foram Insulation         -</th><th>on:         DP-1         0.113         77.9         1.2         21.0         NAD           on:         DP-1         0.076         77.6         0.5         21.9         NAD           on:         DP-2         0.076         77.6         0.5         21.9         NAD           on:         Druble Wait Pipe Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Foulde Wait Pipe Supply - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         Footing Riser - Black Percussive         0.217         74.6         18.4         7.0         NAD           on:         Footing Bases - Black Percussive         0.217         74.6         18.4         7.0         NAD           on:         Footing Bases - Black Percussive         0.106         50.6         21.8         27.6         NAD           on:         Childer Black Percussive         0.106         50.6         21.8         27.6         NAD           on:         Childer Black Percussive         0.106         50.6         21.8         27.6         NAD           on:         Childer Black Percussive         0.106         50.6         21.8<th>DP-1         DP-1         0.113         77.9         1.2         2.1.0         NMD           on:         Duble Well Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NMD           on:         Duble Well Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NMD           on:         Fording Riser - Black Pipe Coating         0.143         76.4         22.4         1.2         NMD           on:         Fording Riser - Black Percussive         0.217         74.6         18.4         7.0         NMD           on:         FE-1         0.217         74.6         18.4         7.0         NMD           on:         Ferid         0.217         74.6         18.4         7.0         NMD           on:         Ferid         0.106         50.6         21.8         27.6         NMD           on:         Chiller Black Foarm Insulation         Elser, Paranterosition         0.103         51.1         41.7         7.2         MD      
    on:         Chiller Black Foarm Insulation         Black Foarm Insulation         0.203         51.1         41.7         7.2         MD           on:         Elstrich Chiller Flace - Grey Caulk</th><th>Onlo bert         DP-1         0.113         77.9         1.2         21.0         NAD           on:         Dh-2         0.076         77.6         0.5         21.9         MAD           on:         Dh-2         0.076         77.6         0.5         21.9         MAD           on:         Duble Wall Pipe Stepty - Black Pipe Coatting         0.143         76.4         22.4         1.2         MAD           on:         Fould Riser - Black Percussive         0.143         76.4         22.4         1.2         MAD           on:         Fould Riser - Black Percussive         0.106         50.6         21.8         7.0         MAD           on:         Suppi Jouct Hallway Outside Chiller Room - Gray Mastic         0.106         50.6         21.8         27.6         MAD           on:         Chiller Black Foam Insulation         Black Foam Insulation         Diack Hallway Outside Chiller Room - Gray Mastic         -         -         -         -         -         -         NAD           on:         Chiller Black Foam Insulation         Black Foam Insulation         Black Foam Insulation         Black Foam Insulation         -         -         -         -         -         -         -         NAD         -</th><th>mon         DP-1         0.113         77.9         1.2         2.10         MAD           on:         Druble Wall Pipe - Black Pipe Coating         0.143         7.6         0.5         2.19         MAD           or:         Druble Wall Pipe Supty- Black Pipe Coating         0.143         7.6         0.5         2.19         MAD           or:         Druble Wall Pipe Supty- Black Pipe Coating         0.143         7.6         0.5         2.19         MAD           or:         Fould Riser - Black Piccussive         0.143         7.6         2.18         7.0         MAD           or:         Fould Blase - Black Piccussive         0.106         5.0.6         2.1.8         2.7.6         MAD           or:         Coling Blase - Black Piercussive         0.106         5.0.6         2.1.8         2.7.6         MAD           or:         Cultine Black Fram Insulation         Black Fram Insulation - Black Fram Insulation         Black Fram Insulation         Black Fram Insulation         Black Fram Insulation         MAD           or:         Chiller Black Fram Insulation         MAD           or:         Chiller Black Fram Insulation         Black Fram In</th><th>mstress         <math>0.113</math> <math>7.79</math> <math>1.2</math> <math>2.10</math>         MsD           on:         <math>0.016</math> <math>7.15</math> <math>0.5</math> <math>2.19</math>         NsD           on:         <math>0.016</math> <math>7.15</math> <math>0.5</math> <math>2.19</math>         NsD           on:         <math>0.016</math> <math>7.15</math> <math>0.5</math> <math>2.19</math>         NsD           on:         <math>0.016</math> <math>8.05</math> <math>2.14</math> <math>1.2</math>         NsD           on:         <math>0.0106</math> <math>50.6</math> <math>2.1.8</math> <math>2.7.6</math>         NsD           on:         <math>0.0106</math> <math>50.6</math> <math>2.1.8</math> <math>7.7</math>         NsD           on:         <math>0.0106</math> <math>50.6</math> <math>51.1</math> <math>7.2</math>         NsD           on:         <math>0.0106</math> <math>50.6</math> <math>51.8</math> <math>7.2</math></th><th>Only Evention         0.113         77.9         1.2         2.1.0         NMD           on:         Dub-I         0.076         77.6         0.5         21.9         NMD           on:         Duble Wall Pipe Supty - Black Pipe Coating         0.076         77.6         0.5         21.9         NMD           on:         Duble Wall Pipe Supty - Black Pipe Coating         0.143         76.4         22.4         1.2         NMD           on:         Fouring Riser - Black Procussive         0.113         74.6         18.4         7.0         NMD           on:         Fouring Blace - Black Procussive         0.106         50.6         2.18         27.6         NMD           on:         Gooting Blace - Black Procussive         0.106         50.6         2.18         27.6         NMD           on:         Suppi Duct Halkway Outside Chiller Room - Gray Mastic         -         -         -         -         NMD           on:         Gupt Duct Halkway Outside Chiller Room - Gray Mastic         -         -         -         NMD           on:         Chiller Black Foram Insulation         Bf-1         7.1         7.2         NMD           on:         Chiller Black Foram Insulation         Dist         0.28</th><th>Distribution         <math>0.113</math> <math>77.3</math> <math>1.2</math> <math>2.10</math>         NMD           on:         Double Wall Pipe Stophy- Black Pipe Coating         <math>0.076</math> <math>77.6</math> <math>0.5</math> <math>21.9</math>         NAD           on:         Double Wall Pipe Stophy- Black Pipe Coating         <math>0.076</math> <math>77.6</math> <math>0.5</math> <math>21.9</math>         NAD           on:         Fooling Rest-Allock Piecoating         <math>0.076</math> <math>77.6</math> <math>0.23</math> <math>76.4</math> <math>22.4</math> <math>1.2</math>         NAD           on:         Fooling Rest-Slack Piecoasive         <math>0.237</math> <math>74.8</math> <math>78.4</math> <math>7.0</math>         NAD           on:         Fooling Rest-Slack Piecoasive         <math>0.237</math> <math>74.8</math> <math>78.4</math> <math>7.0</math>         NAD           on:         Fooling Rest-Flank Piecoasive         <math>0.217</math> <math>74.8</math> <math>78.4</math> <math>7.0</math>         NAD           on:         Supply Uset Halwy Outside Chiller Room - Gray Masic         <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math>           on:         Chiller Black Fean Insulation         BE-1         <math>-1</math> <math>7.0</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math></th><th>Outble Wall Pipe Supply Black Type Coaling         0.113         77.9         1.2         21.0         NAD           or:         Double Wall Pipe Supply Black Type Coaling         0.76         77.6         0.5         21.9         NAD           or:         Double Wall Pipe Supply Black Type Coaling         0.76         77.6         0.5         21.9         NAD           or:         Double Wall Pipe Supply Black Type Coaling         0.143         76.4         22.4         1.2         NAD           or:         Ferition         0.217         74.6         18.4         7.0         NAD           or:         Footing Fases - Black Percussive         0.217         74.6         18.4         7.0         NAD           or:         Ferition         0.217         74.6         18.4         7.0         NAD           or:         Chiller Plack Pean Insulation         0.217         74.6         19.4         7.0         NAD           or:         Chiller Black Fean Insulation         0.306         51.1         41.7         7.2         NAD           or:         Chiller Black Fean Insulation         0.233         57.6         7.3         NAD           or:         Chiller Black Fean Insulation         0.233         7.1&lt;</th><th>Only for the field of the field o</th><th>Dp-1         <math>0.13</math> <math>7.5</math> <math>1.2</math> <math>2.10</math>         NAD           or:         Dudde Wall Pipe Stapty - Black Pipe Coatting         <math>0.75</math> <math>7.5</math> <math>0.5</math> <math>2.19</math>         NAD           or:         Double Wall Pipe Stapty - Black Pipe Coatting         <math>0.73</math> <math>7.6</math> <math>0.5</math> <math>2.19</math>         NAD           or:         FR.1         <math>0.143</math> <math>76.4</math> <math>2.2.4</math> <math>1.2</math>         NAD           or:         Fooling Riser - Black Pincussive         <math>0.143</math> <math>76.4</math> <math>2.2.4</math> <math>1.2</math>         NAD           or:         FeA1         <math>0.217</math> <math>7.4.6</math> <math>18.4</math> <math>7.0</math>         NAD           or:         Fooling Riser - Black Forcussive         <math>0.106</math> <math>50.6</math> <math>2.18</math> <math>2.76</math>         NAD           or:         Fooling Riser - Black Foorm Isudition - Black Foorm Isudit</th><th>Up-1         Up-1         0.113         71.9         1.2         2.10         NAD         1           or:         Double Wail Pipe Suppir - Black Pipe Coating         0.076         77.8         0.5         2.19         NAD         1           or:         Double Wail Pipe Suppir - Black Pipe Coating         0.143         77.4         0.5         2.19         NAD         1           or:         Fooling Rise - Black Pipe Coating         7.4         2.4         1.2         NAD         1           or:         Fooling Rise - Black Percussive         0.143         7.4         2.4         7.0         NAD         1           or:         Fooling Rise - Black Percussive         0.13         7.4         2.18         7.0         NAD           or:         Fooling Rise - Black Percussive         0.105         5.18         2.18         7.0         NAD           or:         Fooling Black Form Insulation - Black Foam Insulation         -         -         -         -         -         -         NAD           or:         Chiler Black Foam Insulation - Black Foam Insulation         -         -         -         -         -         -         NAD           or:         Exterior Chiler Black Foam Insulation - Black Coating</th></th></td<></th></tr<> | DP-1         0.113         77.9         1.2         21.0         NAD           on:         Dubbe Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD   
       on:         Dubbe Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Dubbe Wall Pipe Supply - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FR-1         0.143         76.4         22.4         1.2         NAD           on:         Footing Riser - Black Percussive         0.143         76.4         22.4         1.2         NAD           on:         FB-1         0.217         74.6         18.4         7.0         NAD           on:         FB-1         0.217         74.6         18.4         7.0         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         0.106         50.6         21.8         27.6         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         -         -         -         -         -         -         -         NAD           on:         Supty Duct Hallway Outside Chiller R | Interface         DP-1         0.113         77.9         1.2         21.0         NAD           on:         Duble Wall Pipe - Black Pipe Coating         0.076         77.8         0.5         21.9         NAD           on:         Duble Wall Pipe Supply - Black Pipe Coating         0.076         77.8         0.5         21.9         NAD           on:         Duble Wall Pipe Supply - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         Fb-1         0.143         76.4         22.4         1.2         NAD           on:         Fb-1         0.143         76.4         22.4         1.2         NAD           on:         Fb-1         0.143         7.4.6         18.4         7.0         NAD           on:         Fb-1         0.106         50.6         21.8         27.6         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         -         -         -         -         -         -         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         -         -         -         -         -         -         -         -         -         -         - | DP-1         0.113         77.9         1.2         21.0         NAD           on:         DP-2         0.016         77.6         0.5         21.9         NAD           on:         DP-2         0.076         77.6         0.5         21.9         NAD           on:         DP-2         0.076         77.6         0.5         21.9         NAD           on:         Double Wall Pipe Suppy - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FB-1         0.143         76.4         22.4         1.2         NAD           on:         FB-1         0.217         74.6         18.4         7.0         NAD           on:         FB-1         0.217         74.6         18.4         7.0         NAD           on:         FB-1         0.217         74.6         18.4         7.0         NAD           on:         Suphy Duct Halway Outside Chiller Room - Grey Mastic         0.106         50.6         21.8         27.6         NAD           on:         Suphy Duct Halway Outside Chiller Room - Grey Mastic         -         -         -         -         -         -         -         NAD | mr.         Dp-1         0.113         77.9         1.2         21.0         NAD           on:         Dp-2         0.076         77.5         0.5         21.9         NAD           on:         Dp-2         0.076         77.5         0.5         21.9         NAD           on:         Dubte Wall Pipe - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FR-1         0.143         76.4         22.4         1.2         NAD           on:         Footing Riser - Black Percussive         0.143         76.4         22.4         1.2         NAD           on:         Footing Riser - Black Percussive         0.217         74.6         18.4         7.0         NAD           on:         Footing Bases - Black Percussive         0.106         50.6         21.8         27.6         NAD           on:         Chiller Black Percussive         0.106         50.6         21.8         27.6         NAD           on:         Chiller Black Foarn Insulation         0.106         50.6         21.8         27.6         NAD           on:         Chiller Black Foarn Insulation         0.106         50.6         21.8         27.6 | mth         DP-1         0.113         77.9         1.2         21.0         NAD           on:         DD-2         0.076         77.6         0.5         21.9         NAD           on:         DD-2         0.076         77.6         0.5         21.9         NAD           on:         Double Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Double Wall Pipe Supply - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FR-1         0.113         76.4         22.4         1.2         NAD           on:         Footing Riser - Black Percussive         0.116         50.6         21.8         7.0         NAD           on:         Footing Riser - Black Percussive         0.106         50.6         21.8         27.6         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         -         -         -         -         -         -         -         -         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         -         -         -         -         -         -         -         - | mr.         DP-1         0.113         77.9         1.2         21.0         MAD           on:         Duble Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Duble Wall Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Duble Wall Pipe - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FB-1         0.106         50.6         21.8         27.6         NAD           on:         Supply Duct Hallway Outside Chiller Room - Gray Mastic $$ $$ $$ $ -$ on:         Supply Duct Hallway Outside Chiller Room - Black Foam Insulation $$ $    -$ on:         Chiller Black Foam Insulation $-$ <td< th=""><th>on:         DP-1         0.113         77.9         1.2         21.0         NAD           on:         DP-1         0.076         77.8         0.5         21.3         NAD           on:         DP-2         0.076         77.8         0.5         21.3         NAD           on:         Duble Wall Pipe - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         FR-1         0.143         76.4         22.4         1.2         NAD           on:         Footing Rise - Black Percussive         0.217         74.6         18.4         7.0         NAD           on:         Footing Bases - Black Percussive         0.2106         50.6         21.8         27.6         NAD           on:         Conting Bases - Black Foram Insulation         0.106         50.6         21.8         27.6         NAD           on:         Conting Bases - Black Foram Insulation         -         -         -         -         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         -         -         -         -         NAD           on:         Chiller Black Foram Insulation         Black Foram Insulation         -</th><th>on:         DP-1         0.113         77.9         1.2         21.0         NAD           on:         DP-1         0.076         77.6         0.5         21.9         NAD           on:         DP-2         0.076         77.6         0.5         21.9         NAD           on:         Druble Wait Pipe Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Foulde Wait Pipe Supply - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         Footing Riser - Black Percussive         0.217         74.6         18.4         7.0         NAD           on:         Footing Bases - Black Percussive         0.217         74.6         18.4         7.0         NAD           on:         Footing Bases - Black Percussive         0.106         50.6         21.8         27.6         NAD           on:         Childer Black Percussive         0.106         50.6         21.8         27.6         NAD           on:         Childer Black Percussive         0.106         50.6         21.8         27.6         NAD           on:         Childer Black Percussive         0.106         50.6         21.8<th>DP-1         DP-1         0.113         77.9         1.2         2.1.0         NMD           on:         Duble Well Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NMD           on:         Duble Well Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NMD           on:         Fording Riser - Black Pipe Coating         0.143         76.4         22.4         1.2         NMD           on:         Fording Riser - Black Percussive         0.217         74.6         18.4         7.0         NMD           on:         FE-1         0.217         74.6         18.4         7.0         NMD           on:         Ferid         0.217         74.6         18.4         7.0         NMD           on:         Ferid         0.106         50.6         21.8         27.6         NMD           on:         Chiller Black Foarm Insulation         Elser, Paranterosition         0.103         51.1         41.7         7.2         MD           on:         Chiller Black Foarm Insulation         Black Foarm Insulation         0.203         51.1         41.7         7.2         MD           on:         Elstrich Chiller
Flace - Grey Caulk</th><th>Onlo bert         DP-1         0.113         77.9         1.2         21.0         NAD           on:         Dh-2         0.076         77.6         0.5         21.9         MAD           on:         Dh-2         0.076         77.6         0.5         21.9         MAD           on:         Duble Wall Pipe Stepty - Black Pipe Coatting         0.143         76.4         22.4         1.2         MAD           on:         Fould Riser - Black Percussive         0.143         76.4         22.4         1.2         MAD           on:         Fould Riser - Black Percussive         0.106         50.6         21.8         7.0         MAD           on:         Suppi Jouct Hallway Outside Chiller Room - Gray Mastic         0.106         50.6         21.8         27.6         MAD           on:         Chiller Black Foam Insulation         Black Foam Insulation         Diack Hallway Outside Chiller Room - Gray Mastic         -         -         -         -         -         -         NAD           on:         Chiller Black Foam Insulation         Black Foam Insulation         Black Foam Insulation         Black Foam Insulation         -         -         -         -         -         -         -         NAD         -</th><th>mon         DP-1         0.113         77.9         1.2         2.10         MAD           on:         Druble Wall Pipe - Black Pipe Coating         0.143         7.6         0.5         2.19         MAD           or:         Druble Wall Pipe Supty- Black Pipe Coating         0.143         7.6         0.5         2.19         MAD           or:         Druble Wall Pipe Supty- Black Pipe Coating         0.143         7.6         0.5         2.19         MAD           or:         Fould Riser - Black Piccussive         0.143         7.6         2.18         7.0         MAD           or:         Fould Blase - Black Piccussive         0.106         5.0.6         2.1.8         2.7.6         MAD           or:         Coling Blase - Black Piercussive         0.106         5.0.6         2.1.8         2.7.6         MAD           or:         Cultine Black Fram Insulation         Black Fram Insulation - Black Fram Insulation         Black Fram Insulation         Black Fram Insulation         Black Fram Insulation         MAD           or:         Chiller Black Fram Insulation         MAD           or:         Chiller Black Fram Insulation         Black Fram In</th><th>mstress         <math>0.113</math> <math>7.79</math> <math>1.2</math> <math>2.10</math>         MsD           on:         <math>0.016</math> <math>7.15</math> <math>0.5</math> <math>2.19</math>         NsD           on:         <math>0.016</math> <math>7.15</math> <math>0.5</math> <math>2.19</math>         NsD           on:         <math>0.016</math> <math>7.15</math> <math>0.5</math> <math>2.19</math>         NsD           on:         <math>0.016</math> <math>8.05</math> <math>2.14</math> <math>1.2</math>         NsD           on:         <math>0.0106</math> <math>50.6</math> <math>2.1.8</math> <math>2.7.6</math>         NsD           on:         <math>0.0106</math> <math>50.6</math> <math>2.1.8</math> <math>7.7</math>         NsD           on:         <math>0.0106</math> <math>50.6</math> <math>51.1</math> <math>7.2</math>         NsD           on:         <math>0.0106</math> <math>50.6</math> <math>51.8</math> <math>7.2</math></th><th>Only Evention         0.113         77.9         1.2         2.1.0         NMD           on:         Dub-I         0.076         77.6         0.5         21.9         NMD           on:         Duble Wall Pipe Supty - Black Pipe Coating         0.076         77.6         0.5         21.9         NMD           on:         Duble Wall Pipe Supty - Black Pipe Coating         0.143         76.4         22.4         1.2         NMD           on:         Fouring Riser - Black Procussive         0.113         74.6         18.4         7.0         NMD           on:         Fouring Blace - Black Procussive         0.106         50.6         2.18         27.6         NMD           on:         Gooting Blace - Black Procussive         0.106         50.6         2.18         27.6         NMD           on:         Suppi Duct Halkway Outside Chiller Room - Gray Mastic         -         -         -         -         NMD           on:         Gupt Duct Halkway Outside Chiller Room - Gray Mastic         -         -         -         NMD           on:         Chiller Black Foram Insulation         Bf-1         7.1         7.2         NMD           on:         Chiller Black Foram Insulation         Dist         0.28</th><th>Distribution         <math>0.113</math> <math>77.3</math> <math>1.2</math> <math>2.10</math>         NMD           on:         Double Wall Pipe Stophy- Black Pipe Coating         <math>0.076</math> <math>77.6</math> <math>0.5</math> <math>21.9</math>         NAD           on:         Double Wall Pipe Stophy- Black Pipe Coating         <math>0.076</math> <math>77.6</math> <math>0.5</math> <math>21.9</math>         NAD           on:         Fooling Rest-Allock Piecoating         <math>0.076</math> <math>77.6</math> <math>0.23</math> <math>76.4</math> <math>22.4</math> <math>1.2</math>         NAD           on:         Fooling Rest-Slack Piecoasive         <math>0.237</math> <math>74.8</math> <math>78.4</math> <math>7.0</math>         NAD           on:         Fooling Rest-Slack Piecoasive         <math>0.237</math> <math>74.8</math> <math>78.4</math> <math>7.0</math>         NAD           on:         Fooling Rest-Flank Piecoasive         <math>0.217</math> <math>74.8</math> <math>78.4</math> <math>7.0</math>         NAD           on:         Supply Uset Halwy Outside Chiller Room - Gray Masic         <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math>           on:         Chiller Black Fean Insulation         BE-1         <math>-1</math> <math>7.0</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math></th><th>Outble Wall Pipe Supply Black Type Coaling         0.113         77.9         1.2         21.0         NAD           or:         Double Wall Pipe Supply Black Type Coaling         0.76         77.6         0.5         21.9         NAD           or:         Double Wall Pipe Supply Black Type Coaling         0.76         77.6         0.5         21.9         NAD           or:         Double Wall Pipe Supply Black Type Coaling         0.143         76.4         22.4         1.2         NAD           or:         Ferition         0.217         74.6         18.4         7.0         NAD           or:         Footing Fases - Black Percussive         0.217         74.6         18.4         7.0         NAD           or:         Ferition         0.217         74.6         18.4         7.0         NAD           or:         Chiller Plack Pean Insulation         0.217         74.6         19.4         7.0         NAD           or:         Chiller Black Fean Insulation         0.306         51.1         41.7         7.2         NAD           or:         Chiller Black Fean Insulation         0.233         57.6         7.3         NAD           or:         Chiller Black Fean Insulation         0.233         7.1&lt;</th><th>Only for the field of the field o</th><th>Dp-1         <math>0.13</math> <math>7.5</math> <math>1.2</math> <math>2.10</math>         NAD           or:         Dudde Wall Pipe Stapty - Black Pipe Coatting         <math>0.75</math> <math>7.5</math> <math>0.5</math> <math>2.19</math>         NAD           or:         Double Wall Pipe Stapty - Black Pipe Coatting         <math>0.73</math> <math>7.6</math> <math>0.5</math> <math>2.19</math>         NAD           or:         FR.1         <math>0.143</math> <math>76.4</math> <math>2.2.4</math> <math>1.2</math>         NAD           or:         Fooling Riser - Black Pincussive         <math>0.143</math> <math>76.4</math> <math>2.2.4</math> <math>1.2</math>         NAD           or:         FeA1         <math>0.217</math> <math>7.4.6</math> <math>18.4</math> <math>7.0</math>         NAD           or:         Fooling Riser - Black Forcussive         <math>0.106</math> <math>50.6</math> <math>2.18</math> <math>2.76</math>         NAD           or:         Fooling Riser - Black Foorm Isudition - Black Foorm Isudit</th><th>Up-1         Up-1         0.113         71.9         1.2         2.10         NAD         1           or:         Double Wail Pipe Suppir - Black Pipe Coating         0.076         77.8         0.5         2.19         NAD         1           or:         Double Wail Pipe Suppir - Black Pipe Coating         0.143         77.4         0.5         2.19         NAD         1           or:         Fooling Rise - Black Pipe Coating         7.4         2.4         1.2         NAD         1           or:         Fooling Rise - Black Percussive         0.143         7.4         2.4         7.0         NAD         1           or:         Fooling Rise - Black Percussive         0.13         7.4         2.18         7.0         NAD           or:         Fooling Rise - Black Percussive         0.105         5.18         2.18         7.0         NAD           or:         Fooling Black Form Insulation - Black Foam Insulation         -         -         -         -         -         -         NAD           or:         Chiler Black Foam Insulation - Black Foam Insulation         -         -         -         -         -         -         NAD           or:         Exterior Chiler Black Foam Insulation - Black Coating</th></th></td<> | on:         DP-1         0.113         77.9         1.2         21.0         NAD           on:         DP-1         0.076         77.8         0.5         21.3         NAD           on:         DP-2         0.076         77.8         0.5         21.3         NAD           on:         Duble Wall Pipe - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD
          on:         FR-1         0.143         76.4         22.4         1.2         NAD           on:         Footing Rise - Black Percussive         0.217         74.6         18.4         7.0         NAD           on:         Footing Bases - Black Percussive         0.2106         50.6         21.8         27.6         NAD           on:         Conting Bases - Black Foram Insulation         0.106         50.6         21.8         27.6         NAD           on:         Conting Bases - Black Foram Insulation         -         -         -         -         NAD           on:         Supply Duct Hallway Outside Chiller Room - Grey Mastic         -         -         -         -         NAD           on:         Chiller Black Foram Insulation         Black Foram Insulation         - | on:         DP-1         0.113         77.9         1.2         21.0         NAD           on:         DP-1         0.076         77.6         0.5         21.9         NAD           on:         DP-2         0.076         77.6         0.5         21.9         NAD           on:         Druble Wait Pipe Black Pipe Coating         0.076         77.6         0.5         21.9         NAD           on:         Foulde Wait Pipe Supply - Black Pipe Coating         0.143         76.4         22.4         1.2         NAD           on:         Footing Riser - Black Percussive         0.217         74.6         18.4         7.0         NAD           on:         Footing Bases - Black Percussive         0.217         74.6         18.4         7.0         NAD           on:         Footing Bases - Black Percussive         0.106         50.6         21.8         27.6         NAD           on:         Childer Black Percussive         0.106         50.6         21.8         27.6         NAD           on:         Childer Black Percussive         0.106         50.6         21.8         27.6         NAD           on:         Childer Black Percussive         0.106         50.6         21.8 <th>DP-1         DP-1         0.113         77.9         1.2         2.1.0         NMD           on:         Duble Well Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NMD           on:         Duble Well Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NMD           on:         Fording Riser - Black Pipe Coating         0.143         76.4         22.4         1.2         NMD           on:         Fording Riser - Black Percussive         0.217         74.6         18.4         7.0         NMD           on:         FE-1         0.217         74.6         18.4         7.0         NMD           on:         Ferid         0.217         74.6         18.4         7.0         NMD           on:         Ferid         0.106         50.6         21.8         27.6         NMD           on:         Chiller Black Foarm Insulation         Elser, Paranterosition         0.103         51.1         41.7         7.2         MD           on:         Chiller Black Foarm Insulation         Black Foarm Insulation         0.203         51.1         41.7         7.2         MD           on:         Elstrich Chiller Flace - Grey Caulk</th> <th>Onlo bert         DP-1         0.113         77.9         1.2         21.0         NAD           on:         Dh-2         0.076         77.6         0.5         21.9         MAD           on:         Dh-2         0.076         77.6         0.5         21.9         MAD           on:         Duble Wall Pipe Stepty - Black Pipe Coatting         0.143         76.4         22.4         1.2         MAD           on:         Fould Riser - Black Percussive         0.143         76.4         22.4         1.2         MAD           on:         Fould Riser - Black Percussive         0.106         50.6         21.8         7.0         MAD           on:         Suppi Jouct Hallway Outside Chiller Room - Gray Mastic         0.106         50.6         21.8         27.6         MAD           on:         Chiller Black Foam Insulation         Black Foam Insulation         Diack Hallway Outside Chiller Room - Gray Mastic         -         -         -         -         -         -         NAD           on:         Chiller Black Foam Insulation         Black Foam Insulation         Black Foam Insulation         Black Foam Insulation         -         -         -         -         -         -         -         NAD         -</th> <th>mon         DP-1         0.113         77.9         1.2         2.10         MAD           on:         Druble Wall Pipe - Black Pipe Coating         0.143         7.6         0.5         2.19         MAD           or:         Druble Wall Pipe Supty- Black Pipe Coating         0.143         7.6         0.5         2.19         MAD           or:         Druble Wall Pipe Supty- Black Pipe Coating         0.143         7.6         0.5         2.19         MAD           or:         Fould Riser - Black Piccussive         0.143         7.6         2.18         7.0         MAD           or:         Fould Blase - Black Piccussive         0.106         5.0.6         2.1.8         2.7.6         MAD           or:         Coling Blase - Black Piercussive         0.106         5.0.6         2.1.8         2.7.6         MAD           or:         Cultine Black Fram Insulation         Black Fram Insulation - Black Fram Insulation         Black Fram Insulation         Black Fram Insulation         Black Fram Insulation         MAD           or:         Chiller Black Fram Insulation         MAD           or:         Chiller Black Fram Insulation         Black Fram In</th> <th>mstress         <math>0.113</math> <math>7.79</math> <math>1.2</math> <math>2.10</math>         MsD           on:         <math>0.016</math> <math>7.15</math> <math>0.5</math> <math>2.19</math>         NsD           on:         <math>0.016</math> <math>7.15</math> <math>0.5</math> <math>2.19</math>         NsD           on:         <math>0.016</math> <math>7.15</math> <math>0.5</math> <math>2.19</math>         NsD           on:         <math>0.016</math> <math>8.05</math> <math>2.14</math> <math>1.2</math>         NsD           on:         <math>0.0106</math> <math>50.6</math> <math>2.1.8</math> <math>2.7.6</math>         NsD           on:         <math>0.0106</math> <math>50.6</math> <math>2.1.8</math> <math>7.7</math>         NsD           on:         <math>0.0106</math> <math>50.6</math> <math>51.1</math> <math>7.2</math>         NsD           on:         <math>0.0106</math> <math>50.6</math> <math>51.8</math> <math>7.2</math></th> <th>Only Evention         0.113         77.9         1.2         2.1.0         NMD           on:         Dub-I         0.076         77.6         0.5         21.9         NMD           on:         Duble Wall Pipe Supty - Black Pipe Coating         0.076         77.6         0.5         21.9         NMD           on:         Duble Wall Pipe Supty - Black Pipe Coating         0.143         76.4         22.4         1.2         NMD           on:         Fouring Riser - Black Procussive         0.113         74.6         18.4         7.0         NMD           on:         Fouring Blace - Black Procussive         0.106         50.6         2.18         27.6         NMD           on:         Gooting Blace - Black Procussive         0.106         50.6         2.18         27.6         NMD           on:         Suppi Duct Halkway Outside Chiller Room - Gray Mastic         -         -         -         -         NMD           on:         Gupt Duct Halkway Outside Chiller Room - Gray Mastic         -         -         -         NMD           on:         Chiller Black Foram Insulation         Bf-1         7.1         7.2         NMD           on:         Chiller Black Foram Insulation         Dist         0.28</th> <th>Distribution         <math>0.113</math> <math>77.3</math> <math>1.2</math> <math>2.10</math>         NMD           on:         Double Wall Pipe Stophy- Black Pipe Coating         <math>0.076</math> <math>77.6</math> <math>0.5</math> <math>21.9</math>         NAD           on:         Double Wall Pipe Stophy- Black Pipe Coating         <math>0.076</math> <math>77.6</math> <math>0.5</math> <math>21.9</math>         NAD           on:         Fooling Rest-Allock Piecoating         <math>0.076</math> <math>77.6</math> <math>0.23</math> <math>76.4</math> <math>22.4</math> <math>1.2</math>         NAD           on:         Fooling Rest-Slack Piecoasive         <math>0.237</math> <math>74.8</math> <math>78.4</math> <math>7.0</math>         NAD           on:         Fooling Rest-Slack Piecoasive         <math>0.237</math> <math>74.8</math> <math>78.4</math> <math>7.0</math>         NAD           on:         Fooling Rest-Flank Piecoasive         <math>0.217</math> <math>74.8</math> <math>78.4</math> <math>7.0</math>         NAD           on:         Supply Uset Halwy Outside Chiller Room - Gray Masic         <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math>           on:         Chiller Black Fean Insulation         BE-1         <math>-1</math> <math>7.0</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math> <math>-1</math></th> <th>Outble Wall Pipe Supply Black Type Coaling         0.113         77.9         1.2         21.0         NAD           or:         Double Wall Pipe Supply Black Type Coaling         0.76         77.6         0.5         21.9         NAD           or:         Double Wall Pipe Supply Black Type Coaling         0.76         77.6         0.5         21.9         NAD           or:         Double Wall Pipe Supply Black Type Coaling         0.143         76.4         22.4         1.2         NAD           or:         Ferition         0.217         74.6         18.4         7.0         NAD           or:         Footing Fases - Black Percussive         0.217         74.6         18.4         7.0         NAD           or:         Ferition         0.217        
74.6         18.4         7.0         NAD           or:         Chiller Plack Pean Insulation         0.217         74.6         19.4         7.0         NAD           or:         Chiller Black Fean Insulation         0.306         51.1         41.7         7.2         NAD           or:         Chiller Black Fean Insulation         0.233         57.6         7.3         NAD           or:         Chiller Black Fean Insulation         0.233         7.1&lt;</th> <th>Only for the field of the field o</th> <th>Dp-1         <math>0.13</math> <math>7.5</math> <math>1.2</math> <math>2.10</math>         NAD           or:         Dudde Wall Pipe Stapty - Black Pipe Coatting         <math>0.75</math> <math>7.5</math> <math>0.5</math> <math>2.19</math>         NAD           or:         Double Wall Pipe Stapty - Black Pipe Coatting         <math>0.73</math> <math>7.6</math> <math>0.5</math> <math>2.19</math>         NAD           or:         FR.1         <math>0.143</math> <math>76.4</math> <math>2.2.4</math> <math>1.2</math>         NAD           or:         Fooling Riser - Black Pincussive         <math>0.143</math> <math>76.4</math> <math>2.2.4</math> <math>1.2</math>         NAD           or:         FeA1         <math>0.217</math> <math>7.4.6</math> <math>18.4</math> <math>7.0</math>         NAD           or:         Fooling Riser - Black Forcussive         <math>0.106</math> <math>50.6</math> <math>2.18</math> <math>2.76</math>         NAD           or:         Fooling Riser - Black Foorm Isudition - Black Foorm Isudit</th> <th>Up-1         Up-1         0.113         71.9         1.2         2.10         NAD         1           or:         Double Wail Pipe Suppir - Black Pipe Coating         0.076         77.8         0.5         2.19         NAD         1           or:         Double Wail Pipe Suppir - Black Pipe Coating         0.143         77.4         0.5         2.19         NAD         1           or:         Fooling Rise - Black Pipe Coating         7.4         2.4         1.2         NAD         1           or:         Fooling Rise - Black Percussive         0.143         7.4         2.4         7.0         NAD         1           or:         Fooling Rise - Black Percussive         0.13         7.4         2.18         7.0         NAD           or:         Fooling Rise - Black Percussive         0.105         5.18         2.18         7.0         NAD           or:         Fooling Black Form Insulation - Black Foam Insulation         -         -         -         -         -         -         NAD           or:         Chiler Black Foam Insulation - Black Foam Insulation         -         -         -         -         -         -         NAD           or:         Exterior Chiler Black Foam Insulation - Black Coating</th> | DP-1         DP-1         0.113         77.9         1.2         2.1.0         NMD           on:         Duble Well Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NMD           on:         Duble Well Pipe - Black Pipe Coating         0.076         77.6         0.5         21.9         NMD           on:         Fording Riser - Black Pipe Coating         0.143         76.4         22.4         1.2         NMD           on:         Fording Riser - Black Percussive         0.217         74.6         18.4         7.0         NMD           on:         FE-1         0.217         74.6         18.4         7.0         NMD           on:         Ferid         0.217         74.6         18.4         7.0         NMD           on:         Ferid         0.106         50.6         21.8         27.6         NMD           on:         Chiller Black Foarm Insulation         Elser, Paranterosition         0.103         51.1         41.7         7.2         MD           on:         Chiller Black Foarm Insulation         Black Foarm Insulation         0.203         51.1         41.7         7.2         MD           on:         Elstrich Chiller Flace - Grey Caulk | Onlo bert         DP-1         0.113         77.9         1.2         21.0         NAD           on:         Dh-2         0.076         77.6         0.5         21.9         MAD           on:         Dh-2         0.076         77.6         0.5         21.9         MAD           on:         Duble Wall Pipe Stepty - Black Pipe Coatting         0.143         76.4         22.4         1.2         MAD           on:         Fould Riser - Black Percussive         0.143         76.4         22.4         1.2         MAD           on:         Fould Riser - Black Percussive         0.106         50.6         21.8         7.0         MAD           on:         Suppi Jouct Hallway Outside Chiller Room - Gray Mastic         0.106         50.6         21.8         27.6         MAD           on:         Chiller Black Foam Insulation         Black Foam Insulation         Diack Hallway Outside Chiller Room - Gray Mastic         -         -         -         -         -         -         NAD           on:         Chiller Black Foam Insulation         Black Foam Insulation         Black Foam Insulation         Black Foam Insulation         -         -         -         -         -         -         -         NAD         - | mon         DP-1         0.113         77.9         1.2         2.10         MAD           on:         Druble Wall Pipe - Black Pipe Coating         0.143         7.6         0.5         2.19         MAD           or:         Druble Wall Pipe Supty- Black Pipe Coating         0.143         7.6         0.5         2.19         MAD           or:         Druble Wall Pipe Supty- Black Pipe Coating         0.143         7.6         0.5         2.19         MAD           or:         Fould Riser - Black Piccussive         0.143         7.6         2.18         7.0         MAD           or:         Fould Blase - Black Piccussive         0.106         5.0.6         2.1.8         2.7.6         MAD           or:         Coling Blase - Black Piercussive         0.106         5.0.6         2.1.8         2.7.6         MAD           or:         Cultine Black Fram Insulation         Black Fram Insulation - Black Fram Insulation         Black Fram Insulation         Black Fram Insulation         Black Fram Insulation         MAD           or:         Chiller Black Fram Insulation         MAD           or:         Chiller Black Fram Insulation         Black Fram In | mstress $0.113$ $7.79$ $1.2$ $2.10$ MsD           on: $0.016$ $7.15$ $0.5$ $2.19$ NsD           on: $0.016$ $7.15$ $0.5$ $2.19$ NsD           on: $0.016$ $7.15$ $0.5$ $2.19$ NsD           on: $0.016$ $8.05$ $2.14$ $1.2$ NsD           on: $0.0106$ $50.6$ $2.1.8$ $2.7.6$ NsD           on: $0.0106$ $50.6$ $2.1.8$ $7.7$ NsD           on: $0.0106$ $50.6$ $51.1$ $7.2$ NsD           on: $0.0106$ $50.6$ $51.8$ $7.2$ | Only Evention         0.113         77.9         1.2         2.1.0         NMD           on:         Dub-I         0.076         77.6         0.5         21.9         NMD           on:         Duble Wall Pipe Supty - Black Pipe Coating         0.076         77.6         0.5         21.9         NMD           on:         Duble Wall Pipe Supty - Black Pipe Coating         0.143         76.4         22.4         1.2         NMD           on:         Fouring Riser - Black Procussive         0.113         74.6         18.4         7.0         NMD           on:         Fouring Blace - Black Procussive         0.106         50.6         2.18         27.6         NMD           on:         Gooting Blace - Black Procussive         0.106         50.6         2.18         27.6         NMD           on:         Suppi Duct Halkway Outside Chiller Room - Gray Mastic         -         -         -         -         NMD           on:         Gupt Duct Halkway Outside Chiller Room - Gray Mastic         -         -         -         NMD           on:         Chiller Black Foram Insulation         Bf-1         7.1         7.2         NMD           on:         Chiller Black Foram Insulation         Dist         0.28 | Distribution $0.113$ $77.3$ $1.2$ $2.10$ NMD           on:         Double Wall Pipe Stophy- Black Pipe Coating $0.076$ $77.6$ $0.5$ $21.9$ NAD           on:         Double Wall Pipe Stophy- Black Pipe Coating $0.076$ $77.6$ $0.5$ $21.9$ NAD           on:         Fooling Rest-Allock Piecoating $0.076$ $77.6$ $0.23$ $76.4$ $22.4$ $1.2$ NAD           on:         Fooling Rest-Slack Piecoasive $0.237$ $74.8$ $78.4$ $7.0$ NAD           on:         Fooling Rest-Slack Piecoasive $0.237$ $74.8$ $78.4$ $7.0$ NAD           on:         Fooling Rest-Flank Piecoasive $0.217$ $74.8$ $78.4$ $7.0$ NAD           on:         Supply Uset Halwy Outside Chiller Room - Gray Masic $-1$ $-1$ $-1$ $-1$ $-1$ $-1$ on:         Chiller Black Fean Insulation         BE-1 $-1$ $7.0$ $-1$ $-1$ $-1$ $-1$ $-1$ $-1$ $-1$ $-1$ $-1$ | Outble Wall Pipe Supply Black Type Coaling         0.113         77.9         1.2         21.0         NAD           or:         Double Wall Pipe Supply Black Type Coaling         0.76         77.6         0.5         21.9         NAD           or:         Double Wall Pipe Supply Black Type Coaling         0.76         77.6         0.5         21.9         NAD           or:         Double Wall Pipe Supply Black Type Coaling         0.143         76.4         22.4         1.2         NAD           or:         Ferition         0.217         74.6         18.4         7.0         NAD           or:         Footing Fases - Black Percussive         0.217         74.6         18.4         7.0         NAD           or:         Ferition         0.217         74.6         18.4         7.0         NAD           or:         Chiller Plack Pean Insulation         0.217         74.6         19.4         7.0         NAD           or:         Chiller Black Fean Insulation         0.306         51.1         41.7         7.2         NAD           or:         Chiller Black Fean Insulation         0.233         57.6         7.3         NAD           or:         Chiller Black Fean Insulation        
0.233         7.1< | Only for the field of the field o | Dp-1 $0.13$ $7.5$ $1.2$ $2.10$ NAD           or:         Dudde Wall Pipe Stapty - Black Pipe Coatting $0.75$ $7.5$ $0.5$ $2.19$ NAD           or:         Double Wall Pipe Stapty - Black Pipe Coatting $0.73$ $7.6$ $0.5$ $2.19$ NAD           or:         FR.1 $0.143$ $76.4$ $2.2.4$ $1.2$ NAD           or:         Fooling Riser - Black Pincussive $0.143$ $76.4$ $2.2.4$ $1.2$ NAD           or:         FeA1 $0.217$ $7.4.6$ $18.4$ $7.0$ NAD           or:         Fooling Riser - Black Forcussive $0.106$ $50.6$ $2.18$ $2.76$ NAD           or:         Fooling Riser - Black Foorm Isudition - Black Foorm Isudit | Up-1         Up-1         0.113         71.9         1.2         2.10         NAD         1           or:         Double Wail Pipe Suppir - Black Pipe Coating         0.076         77.8         0.5         2.19         NAD         1           or:         Double Wail Pipe Suppir - Black Pipe Coating         0.143         77.4         0.5         2.19         NAD         1           or:         Fooling Rise - Black Pipe Coating         7.4         2.4         1.2         NAD         1           or:         Fooling Rise - Black Percussive         0.143         7.4         2.4         7.0         NAD         1           or:         Fooling Rise - Black Percussive         0.13         7.4         2.18         7.0         NAD           or:         Fooling Rise - Black Percussive         0.105         5.18         2.18         7.0         NAD           or:         Fooling Black Form Insulation - Black Foam Insulation         -         -         -         -         -         -         NAD           or:         Chiler Black Foam Insulation - Black Foam Insulation         -         -         -         -         -         -         NAD           or:         Exterior Chiler Black Foam Insulation - Black Coating |

Page 2 of 4

AmeriSci Job #: 223072612 Client Name: Response Labs

# Table I Summary of Bulk Asbestos Analysis Results 430-1-0; Orangeburg Cook Chill Center

** Asbestos % by TEM	NAD		NAD		NAD		NA		AN NA	:	AN N		NA		NA		NA		NA		NA		AN		NA		NA		¥N.		AN	
⁺⁺ Asbestos % by PLM/DS	NAD		NAD		NAD		NAD		NAD		NAD		NAD		NAD		DAN		NAD		NAD		NAD		NAD		NAD		NAU		NAD	
Insoluble Non-Asbestos Inorganic %	3.2		9.5		11.1		1		I		1		1												1		-					
Acid Soluble Inorganic %	4.7		36.5		35.8		ł		ł		-		I				ł		1		-		I				I		1			
Heat Sensitive Organic %	92.1		54.0		53.1		1		1				I		]		I				1		ł		-		1				ļ	
Sample Weight (gram)	0.163		0.252	Caulk	0.298	Caulk	1		1		I		1	lation	1	lation	ł	lation	l		1		I		I		I		-			
HG Area		t - Black Gasket		ections - White (		ections - White (		iliow Insulation		flow Insulation		ellow Insulation		n - Yellow Insul		un - Yellow Insul		on - Yellow Insul		sulation		sulation		cket		icket		ulation		ulation		wn Insulation
Client Samole#	PRG-2	I ocation: Chiller Pump Pipe Run Gasket - Black Gasket	WC-1	Location: Chiller Pump Pipe Run End Sections - White Caulk	WC-2	Location: Chiller Pump Pipe Run End Sections - White Caulk	PRE-1	Location: Chiller Exterior Pipe Runs - Yellow Insulation	PRE-2	Location: Chiller Exterior Pipe Runs - Yellow Insulation	PRE-3	Location: Chiller Exterior Pipe Runs - Yellow Insulation	EIE-1	Location: Chiller Exterior Elbow Insulation - Yellow Insulation	EIE-2	Location: Chiller Exterior Elbow Insulation - Yellow Insulation	EIE-3	Location: Chiller Exterior Elbow Insulation - Yellow Insulation	MI-1	Location: Chiller Room Walls - Yellow Insulation	2-IW	Location: Chiller Room Walls - Yellow Insulation	WJ-1	Location: Chiller Room Walls - White Jacket	WJ-2	Location: Chiller Room Walls - White Jacket	PI-1	Location: Chiller Pump Unit - Yellow Insulation	PI-2	Location: Chiller Pump Unit - Yellow Insulation	PRB-1	Location: Chiller Pump Pipe Runs - Brown Insulation
AmeriSci Samole #	4 T	Lincation: (	00	Location: (	19	Location: (	20	Location: V	21	Location: 4	22	Location:	23	Location:	24	Location:	25	Location:	26	Location:	27	Location:	28	Location:	29	Location:	30	Location:	31	Location:	32	Location:

Page 3 of 4

AmeriSci Job #: 223072612 Client Name: Response Labs

# Table I Summary of Bulk Asbestos Analysis Results 430-1-0; Orangeburg Cook Chill Center

Page 4 of 4

AmeriSci Job #: 223072612

Client Name: Response Labs

## Table I Summary of Bulk Asbestos Analysis Results 430-1-0; Orangeburg Cook Chill Center

** Asbestos % by TEM	NA			N N		VIV		NtA		1414	NAU		NAL	
** Asbestos % by PLM/DS	NAD		NAU		NAU	(	NAU		NAU		NAD		NAD	
Insoluble Non-Asbestos Inorganic %			1		1		1				28.7		31.4	
Acid Soluble Inorganic %			I		ł		I		1		42.5		48.1	
Heat Sensitive Organic %					I		Ī		ļ		28.8		20.5	
Sample Weight (gram)	1	_		_	-	_	I	Insulation	I	Insulation	0.287	utty.	0.262	utty
HG Area		Drange Insulation		<b>Drange Insulation</b>		<b>Drange Insulation</b>		es - Black Foam		es - Black Foam		overing - Black P		overing - Black P
Clime Samula#	El-1	Location: Chiller Pump Pipe Elbows - Orange Insulation	EI-2	Location: Chiller Pump Pipe Elbows - Orange Insulation	EL-3	Location: Chiller Pump Pipe Elbows - Orange Insulation	BC-1	Location: Chilter Pump Condenser Lines - Black Foam Insulation	BC-2	Location: Chiller Pump Condenser Lines - Black Foam Insulation	EP-1	Location: Underground Electric Line Covering - Black Putty	EP-2	Location: Underground Electric Line Covering - Black Putty
AmeriSci Samole #	49	Location: (	50	Location: (	51	Location: (	52	Location: (	53	Location: 4	54	Location:	55	Location:

Analyzed by: Feyza Gungor Date: 7/19/2023

Reviewed by: Feyza Gungor

\*\*Quantitative Analysis (Semi/Full); Bulk Asbestos Analysis - PLM by Appd E to Subpt E, 40 CFR 763 or NYSDOH ELAP 198.1 for New York friable samples or NYSDOH ELAP 198.6 for New York NOB samples; TEM (Semi/Fuil) by EPA 600/R-93/116 (or NYSDOH ELAP 198.4; for New York samples). Analysis using Hitachi, Model H7000-Noran 7 System, Microscope, Serial #: 747-05-06. NAD = no asbestos detected during a quantitative analysis; NA = not analyzed; Trace = <1%; (SOF-V) = Sprayed On Fireproofing containing Vermiculite; (SM-V) = Surfacing Material containing Vermiculite; Quantitation for beginning weights of <0.1 grams should be considered as qualitative only; Qualitative Analysis: Asbestos analysis results of "Present" or "NVA = No Visible Asbestos" represents results for Qualitative PLM or TEM Analysis only (no accreditation coverage available from any regulatory agency for qualitative analyses): NVLAP (PLM) 200546-0, NYSDOH ELAP Lab 11480, NJ Lab ID #NY031.

Warning Note: PLM limitation, only TEM will resolve fibers <0.25 micrometers in diameter. TEM bulk analysis is representative of the fine grained matrix material and may not be representative of nonuniformly dispersed debris for which PLM evaluation is recommended (i.e. soils and other heterogenous materials)

### **CHAIN OF CUSTODY – ASBESTOS**

Client: OSPA Engineering	Project: Orangeburg Cook Chill Center
800 Route 146 Bldg. 200 Suite 280	Email: nlaing@ospaengineering.com
Clifton Park, NY 12065	Project Number: OSPA 430-1-0
Contact: Nathan Laing	Sampled By: OSPA Engineering Services
Phone/Fax: 518-709-9959	Date / Time Collected: June 30, 2023

### ALL NEGATIVE PLM NOB'S ARE TO IMMEDIATELY GO TO TEM AT 24HR TAT

Turnaround Time: 24HR 48HR 5 Day Standard Other:\_\_\_\_\_

	Log No.	Sample No.	Sample Location	Sample Material	Analysis	Results
	13	DP-1	Double Wall Pipe	Black Pipe Coating	NOB/TEM	
np	17-1				Positive Stop	•
Y	A	DP-2	Double Wall Pipe	Black Pipe Coating	NOB/TEM	3. Schrooth
	1.		Supply		Positive Stop	
	25	FR-1	Footing Riser	Black Percussive	NOB/TEM	
	1				Positive Stop	
	20	FB-1	Footing Bases	Black Percussive	NOB/TEM	992299318.000
	10				Positive Stop	
	n	GM-1	Supply Duct	Grey Mastic	NOB/TEM	
N	A		Hallway Outside		Positive Stop	
			Chiller Room	educations		
	178	BF-1	Chiller Black	Black Foam	NOB/TEM	
			Foam Insulation	Insulation	Positive Stop	
	29	BF-2	Chiller Black	Black Foam	NOB/TEM	
	X		Foam Insulation	Insulation	Positive Stop	
		JF-1	Exterior Chiller	Grey Caulk	NOB/TEM	
	P		Pipe Joint Face		Positive Stop	
		JF-2	Exterior Chiller	Grey Caulk	NOB/TEM	
	81		Pipe Joint Face		Positive Stop	
- 1		ECG-1	Exterior Chiller	Black Gasket	NOB/TEM	
- [	01		Compressor		Positive Stop	
1	87		Gasket			
1	8	ES-1	Electrical Room	White Fireproofing	NOB/TEM	
	0-	ſ	Ceilings	Spray Foam	Positive Stop	
	84	ES-2	Electrical Room	White Fireproofing	NOB/TEM	
	0,		Ceilings	Spray Foam	Positive Stop	
1	er	ES-3	Electrical Room	White Fireproofing	NOB/TEM	
`	D	,	Ceilings	Spray Foam	Positive Stop	
	Vq	o IM-1	Interior Walls	Stone Masonry	NOB/TEM	
	. 4	¥			Positive Stop	and a subsection of the subsec

m	91	PRY-3	Chiller Pipe Runs	Yellow Insulation	NOB/TEM	
W					Positive Stop	
/Γ	115	HJ-1	Chiller Pipe Runs	White Plastic	NOB/TEM	
	10		Solid Jacket		Positive Stop	
	11	HJ-2	Chiller Pipe Runs	White Plastic	NOB/TEM	
	11		Solid Jacket		Positive Stop	
	10	PJ-1	Pump Unit	White Jacket	NOB/TEM	
	12				Positive Stop	
	12	PJ-2	Pump Unit	White Jacket	NOB/TEM	
	13				Positive Stop	
	11	PH-1	Chiller Pipe Runs	White Plastic	NOB/TEM	
	Щ		Solid Jacket		Positive Stop	
	15	PH-2	Chiller Pipe Runs	White Plastic	NOB/TEM	
	15		Solid Jacket		Positive Stop	
	13	BR-1	Backflow Pipe	Yellow Insulation	NOB/TEM	
	10		Runs		Positive Stop	
	11	BR-2	Backflow Pipe	Yellow Insulation	NOB/TEM	
	17	~~~~	Runs		Positive Stop	
	10	BR-3	Backflow Pipe	Yellow Insulation	NOB/TEM	
	18	DICO	Runs		Positive Stop	
1	10	BFJ-1	Backflow Pipe	Green Jacket	NOB/TEM	
	19		Runs	Green sucker	Positive Stop	
		BFJ-2	Backflow Pipe	Green Jacket	NOB/TEM	
	2D		Runs	Groon subnet	Positive Stop	
		EI-1	Chiller Pump Pipe	Orange Insulation	NOB/TEM	
	21	171-1	Elbows	Orange moutation	Positive Stop	
		EI-2	Chiller Pump Pipe	Orange Insulation	NOB/TEM	
	22	2-101	Elbows	Orange insulation	Positive Stop	
		EI-3		Orange Insulation	NOB/TEM	
	23	E1-3	Chiller Pump Pipe Elbows	Oralige insulation	Positive Stop	
	w	DO 1		Black Foam	NOB/TEM	
	24	BC-1	Chiller Pump Condenser Lines	Insulation	Positive Stop	
	01	DO A				
	25	BC-2	Chiller Pump	Black Foam	NOB/TEM Bositive Stop	
	w		Condenser Lines	Insulation	Positive Stop	
	01	EP-1	Underground	Black Putty	NOB/TEM	
	24		Electric Line		Positive Stop	
		ED O	Covering	D1+ 1- D44	NOD/TEM	
	~1	EP-2	Underground	Black Putty	NOB/TEM Positive Stop	
V	LT		Electric Line Covering			
<u> </u>				eiect Comment		Electron and a constraint of the constraint of t

Disposition of Samples: Accept\_\_\_\_ Reject\_\_\_\_ Comments:

Relinquished By: Received By:	Date:	Time:
armei Sumi	non 7/3/23	1402

Page \_\_\_\_of \_\_\_\_\_



Experience is the solution 314 North Pearl Street Albany, New York 12207 (800) 848-4983 (518) 434-4546 Fax (518) 434-0891

July 17, 2023

Nathan Laing OSPA Engineering 800 Route 146 Bldg #200 Suite 280 Clifton Park, NY 12065

TEL: 518-636-9956

Work Order No: 230713062

Project# : OSPA 430-1-0

RE: Lead Paint Orangeburg Cook Chill Replacement

Adirondack Environmental Services, Inc received 3 samples on 7/13/2023 for the analyses presented in the following report.

Please see case narrative for specifics on analysis.

If you have any questions regarding these tests results, please feel free to call.

Sincerely,

Java Danik

ELAP#: 10709

Tara Daniels Laboratory Director

### **Adirondack Environmental Services, Inc**

### **OSPA Engineering**

Lead Paint

Orangeburg Cook Chill Replacement

Sample containers were not supplied by Adirondack Environmental Services.



Qualifiers:	ND : Not Detected at reporting limit	C: CCV below acceptable Limits
	J: Analyte detected below quantitation limit	C+: CCV above acceptable Limits
	B: Analyte detected in Blank	S: LCS Spike recovery is below acceptable limits
	X : Exceeds maximum contamination limit	S+: LCS Spike recovery is above acceptable limits
	H: Hold time exceeded	Z: Duplication outside acceptable limits
	N: Matrix Spike below acceptable limits	T : Tentatively Identified Compound-Estimated
	N+: Matrix Spike is above acceptable limits	E :Above quantitation range-Estimated

Note : All Results are reported as wet weight unless noted

The results relate only to the items tested. Information supplied by the client is assumed to be correct.

Lab WorkOrder: 230713062

**Date:** 17-Jul-23

CLIENT:	OSPA Engineering				LabWo	ork Order: 230'	713062
Project:	Lead Paint				PO#:	200	
	Orangeburg Cook Chill	Replacement			10#.	Project# :OSPA	430-1-0
Lab SampleID:	230713062-001				Collection	n Date: 6/30/2023	3
Client Sample ID	: YPL-1				N	Aatrix: PAINT	
Analyses		Result	RL	Qual	Units	DF	Date Analyzed
LEAD IN PAINT - I		<b>o</b> \					Analyst: WE
Lead	: SW3050B - 7/14/202	3  ) 1.90	0.004		%	1	7/14/2023 7:10:29 PM
Lab SampleID:	230713062-002			I	Collection	n Date: 6/30/2023	3
Client Sample ID	BPL-1				N	Aatrix: PAINT	
Analyses		Result	RL	Qual	Units	DF	Date Analyzed
LEAD IN PAINT -	EPA 6010C						Analyst: WE
<b>( Prep</b> Lead	: SW3050B - 7/14/202	3  ) 0.010	0.001		%	1	7/14/2023 7:19:35 PM
Lab SampleID:	230713062-003				Collectio	n Date: 6/30/2023	3
Client Sample ID	GRPL-1				Ν	latrix: PAINT	
Analyses		Result	RL	Qual	Units	DF	Date Analyzed
LEAD IN PAINT -	EPA 6010C						Analyst: WE
( Prep Lead	: SW3050B - 7/14/202	3) 0.069	0.001		%	1	7/14/2023 7:34:16 PM

### Adirondack Environmental Services, Inc

Date: 17-Jul-23

230713042

### **CHAIN OF CUSTODY – LEAD**

Client: OSPA Engineering	Project: Orangeburg Cook Chill Replacement
800 Route 146 Bldg. 200 Suite 280	Email: <u>nlaing@ospaengineering.com</u>
Clifton Park, NY 12065	Project Number: OSPA <u>430-1-0</u>
Contact: Nathan Laing	Sampled By: OSPA Engineering Services
Phone/Fax: 518-709-9959	Date / Time Collected: June 30, 2023

### ALL NEGATIVE PLM NOB'S ARE TO IMMEDIATELY GO TO TEM AT 24HR TAT Turnaround Time: 24HR 48HR 5 Day Standard Other:\_\_\_\_\_

Log No.	Sample No.	Sample Location	Sample Material	Analysis	Results
	YPL-1	Compression	Yellow Paint	LEAD	
M		Expansion Tank Pipes			
002	BPL-1	Exterior Pipe and Stringers	Brown Paint	LEAD	
003	GRPL-1	Chiller Exterior Unit Components	Grey Paint	LEAD	

Disposition of Samples: Accept \_\_\_\_ Reject \_\_\_\_ Comments:

Relinquished By:	Received By;	Date:	Time:
Mul Cost		713/23	3:120
- <u>y</u>			ł





Experience is the solution 314 North Pearl Street Albany, New York 12207 (800) 848-4983 (518) 434-4546 Fax (518) 434-0891

July 24, 2023

Nathan Laing OSPA Engineering 800 Route 146 Bldg #200 Suite 280 Clifton Park, NY 12065

TEL: 518-636-9956

Work Order No: 230713063

Project# : OSPA 430-1-0

RE:

Orangeburg Cook Chill Center

Adirondack Environmental Services, Inc received 3 samples on 7/13/2023 for the analyses presented in the following report.

Please see case narrative for specifics on analysis.

If you have any questions regarding these tests results, please feel free to call.

Sincerely,

Java Danik

ELAP#: 10709

Tara Daniels Laboratory Director

### **OSPA Engineering**

Orangeburg Cook Chill Center

Sample containers were not supplied by Adirondack Environmental Services.

### Definitions - RL: Reporting Limit DF: Dilution factor

Qualifiers:	ND : Not Detected at reporting limit	C: CCV below acceptable Limits
	J: Analyte detected below quantitation limit	C+: CCV above acceptable Limits
	B: Analyte detected in Blank	S: LCS Spike recovery is below acceptable limits
	X : Exceeds maximum contamination limit	S+: LCS Spike recovery is above acceptable limits
	H: Hold time exceeded	Z: Duplication outside acceptable limits
	N: Matrix Spike below acceptable limits	T : Tentatively Identified Compound-Estimated
	N+: Matrix Spike is above acceptable limits	E :Above quantitation range-Estimated

Note : All Results are reported as wet weight unless noted

The results relate only to the items tested. Information supplied by the client is assumed to be correct.

### **CASE NARRATIVE**

**Date:** 24-Jul-23

Lab WorkOrder: 230713063

CLIENT:	OSPA Engineering	(	Client Sample	<b>ID:</b> GC-1	
Work Order:	230713063		Collection D	ate: 6/30/2	023
<b>Reference:</b>	/ Orangeburg Cook Chill Center		Lab Sample	<b>D:</b> 23071	3063-001
PO#:			Ma	trix: SOLII	)
	<b>Project# : OSPA 430-1-0</b>				
Analyses	Result	RL Qual	Units	DF	Date Analyzed
POLYCHLORIN	ATED BIPHENYLS - EPA 8082A				Analyst: KF
(Pre	p: SW 3580A - 7/14/2023 )				
PCB, Total	ND	1.0	µg/g	1	7/14/2023 12:08:43 PM

51.3-143

90.0

%REC

### Adirondack Environmental Services, Inc

Surr: Decachlorobiphenyl

**Date:** 24-Jul-23

1

7/14/2023 12:08:43 PM

CLIENT: Work Order:	OSPA Engineering 230713063	Collection Date: 6/30/2023													
<b>Reference:</b>	/ Orangeburg Cook Chill Center	Lab Sample ID: 230713063-002													
PO#:			Ma	trix: SOLII	)										
	<b>Project# : OSPA 430-1-0</b>														
Analyses	Result	RL Qı	al Units	DF	Date Analyzed										
	ATED BIPHENYLS - EPA 8082A p: SW 3580A - 7/14/2023 )				Analyst: KF										
PCB, Total	ND	10	μg/g	10	7/19/2023 6:17:33 PM										

51.3-143

120

%REC

Date: 24-Jul-23

10

7/19/2023 6:17:33 PM

### Adirondack Environmental Services, Inc

Surr: Decachlorobiphenyl

CLIENT:	OSPA Engineering	(	Client Sample	<b>ID:</b> JF-1			
Work Order:	230713063		Collection I	ate: 6/30/2	023		
<b>Reference:</b>	/ Orangeburg Cook Chill Center	Lab Sample ID: 230713063-003					
PO#:			Ma	trix: SOLII	)		
	<b>Project# : OSPA 430-1-0</b>						
Analyses	Result	RL Qua	l Units	DF	Date Analyzed		
	ATED BIPHENYLS - EPA 8082A				Analyst: KF		
	p: SW 3580A - 7/14/2023 )						

51.3-143

130

%REC

Date: 24-Jul-23

10

7/19/2023 6:31:37 PM

### Adirondack Environmental Services, Inc

Surr: Decachlorobiphenyl

230713063

### **CHAIN OF CUSTODY – PCB's**

Client: OSPA Engineering 800 Route 146 Bldg. 200 Suite 280 Clifton Park, NY 12065 Contact: Nathan Laing

Phone/Fax: 518-709-9959

\_\_\_\_\_ Sample

Email: <u>nlaing@ospaengineering.com</u> Project Number: <u>OSPA 430-1-0</u> Sampled By: <u>OSPA Engineering</u> Date / Time Collected: <u>6/30/2023</u>

Project: Orangeburg Cook Chill Center

Turnaround Time: 24HR 48HR

5 Day

Standard

Other:\_\_\_\_


Log	Sample No.	Sample	Sample Material	Analysis	Results
No.	-	Location			
	GC-1	Exterior Unit Pipe	Grey Caulk	PCB's	
00 i		Joints	-		
	WC-1	Chiller Pump Pipe	White Caulk	PCB's	
)0 Z		Run End Sections			
	JF-1	Exterior Chiller	Grey Caulk	PCB's	
003		Pipe Joint Face			


Disposition of Samples: Accept\_\_\_\_\_ Reject\_\_\_\_ Comments:


Relinquished By:	Received By:	Date:	Time:
Millo	O $A$	1/12/23	3:12p




Page \_\_\_\_\_of \_\_\_\_\_

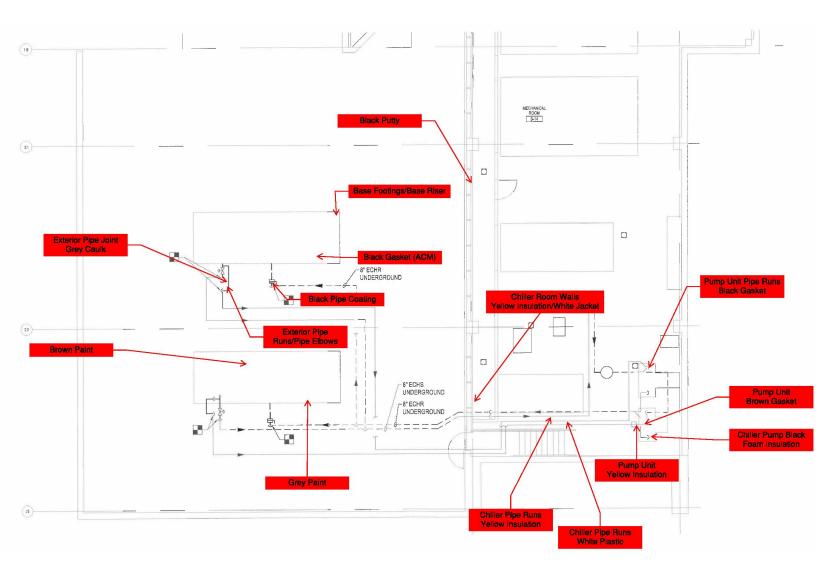

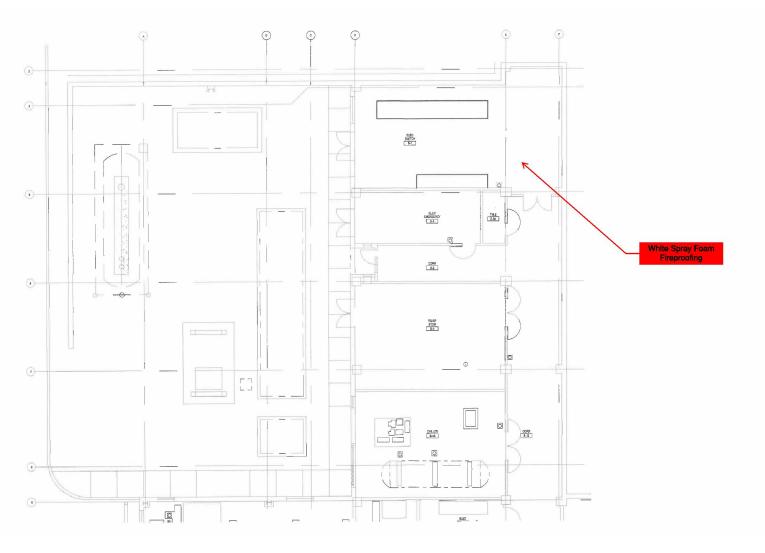

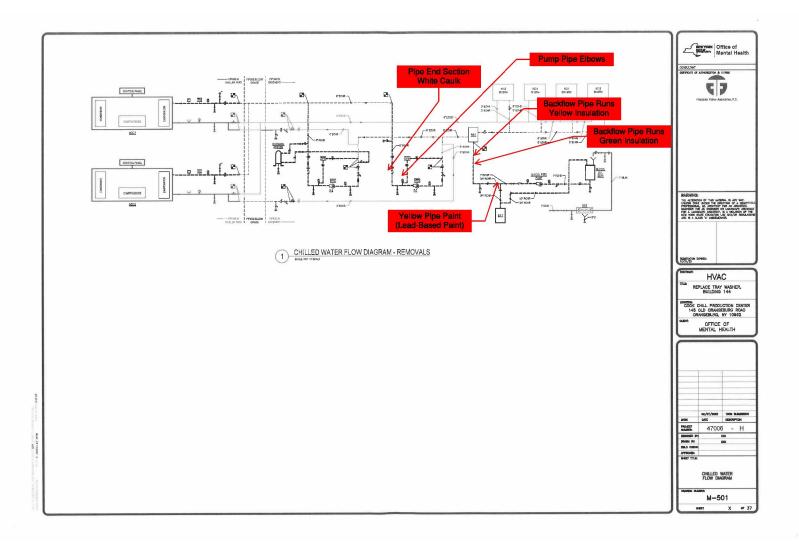

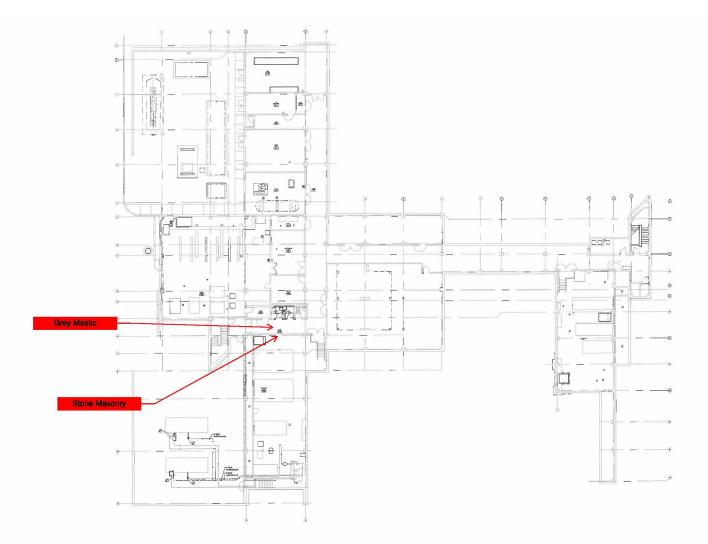

Material	Location	Estimated Quantity
Yellow Pipe Paint	Backflow Pipes	68 LF
Black Compressor Gasket	Exterior Chillers	4 SF

### **Total Existing Material Quantities**

## Appendix C Asbestos License





## NANAN **an** in ananan in an

IF FOUND RETURN TO: NYSDOL - L&C UNIT ROOM 161A BUILDING 12 STATE OFFICE CAMPUS ALBANY NY 12240



### Office of Minority and Women-Owned Business Enterprises

### **Design and Construction**

AN ISO 9001:2015 CERTIFIED ORGANIZATION

Office of Minority and Women-Owned Business Enterprises, 29th Floor, Corning Tower The Governor Nelson A. Rockefeller Empire State Plaza Albany, New York 12242

Phone: (518) 486-9284

FAX: (518) 486-9285

### CONTRACTOR'S MWBE UTILIZATION PLAN

Revised Plan

### Contract No.:

REMINDER: Utilize the New York State Contract System located at <u>https://ny.newnycontracts.com/Default.asp?TN=ny&XID=8353</u> to report MWBE payments on a monthly basis. Making false representations or including information evidencing a lack of good faith as part of, or in conjunction with, the submission of a Utilization Plan is prohibited by law and may result in penalties including, but not limited to, termination of a contract for cause, loss of eligibility to submit future bids, and/or withholding of payments. Firms that do not perform commercially useful functions may not be counted toward MWBE utilization.

Contractor's Name, Address and Federal ID No.:	Contract Description/Location:		Date Proposal Approved:	Date Printed:		Bid Date:		MWBE GOALS		LS	
									MBE%	- VVE	3E%
	Work/Job	Order:		OGS Project Number:	Work	Order Value:	Contrac	t Amount:			
Federal ID No.:											
Certified MBE/WBE Name, Address and Phone No.	MBE	WBE	Descriptio	n of Subcontracting/Supplies		Anticipate performance/pu date(s)	Irchase	Dollar Va Subcontract			SEE BDC 328.1
Federal ID No.:										7	
Federal ID No.:										GS USE ONLY	
Federal ID No.:										FOR 00	
Federal ID No.:											

Pursuant to Executive Law Article 15-A, my firm v		Contractor's Comments:				
faith effort to achieve the MWBE goals on this co	ntract.					
Contractor's Signature:						
-						
Enter Name:						
		FOR OGS USE ONLY				
Title:		Accepted	d 🗌 Accepte	d as Noted	Notice of Defic	ciency Issued
		MBE %	MBE \$	WBE %	WBE \$	
E-Mail Address:	Date:	OGS Authorized Signatu	re:	Enter Name:		Date:



Office of Minority and Women-Owned Business Enterprises **Design and Construction** 

AN ISO 9001:2015 CERTIFIED ORGANIZATION

Office of Minority and Women-Owned Business Enterprises, 29th Floor, Corning Tower The Governor Nelson A. Rockefeller Empire State Plaza Albany, New York 12242

Phone: (518) 486-9284 FAX: (518) 486-9285

### CONTRACTOR'S LIST OF SUBCONTRACTORS/SUPPLIERS

Contract No.

Contractor's Name, Address and Fede	eral ID No.:	Project De	scription/Loc	ation:			Date Submitted:		Bid Date:		MWBE Goals		SDVOB Goal
											MBE	WBE	
		Constr	ruction Contr	acts Exc	eeding \$	100,000	Submittal No	D.:	Contract Amoun	ıť:			
		Comm \$25,00	odity or Serv	vice Cont	racts Exc	eeding							
Federal ID No.					01 <i>In-</i> 12 P								
Date Proposal Approved:	Date Printe	ed:		OG	S Project	Number:		Work/Job Or	der:		Work Order	Value:	
Subcontractor/Supplier Name, Address, Phone No. and Feder (Do not list information previously submitted	al ID No. .)	Sub/Supplier (Check One) Sub Supplier		MBE	WBE	SDVOB	General Description of Work		of Work	Subcontractor/ Supplier Dollar Value		OGS Use Only	
Federal ID No.:													
Federal ID No.:													
Federal ID No.:													
Federal ID No.:	-												
Pursuant to Executive Law Article 15-A and Article 17-B, my firm proposes to use the certified firms listed above.		OGS Use Or	nly				Proposed Goal Attainments:						
		MBE %		_		WBE 9	% SD			DVOB %			
Contractor's Signature			cepted			epted as Note	b	Not Accepted					
		Reason: _											
Title		-											
Date		OGS A	OGS Authorized Signature							_	Date _		

### APPENDIX

### **COMMISSIONING PROCESS**

### PART 1 - GENERAL

### 1.01 **DESCRIPTION**

A. This Document describes the overall commissioning process and is provided for information only. Commissioning requires the participation of all members of a Commissioning Team as described in this Document. The goal of Commissioning is to ensure that all systems are operating in a manner consistent with the Contract Documents. Each contractor designated as responsible for a commissioned system shall be familiar with all parts of this Document and the responsibilities that are required of each contractor as relates to all other Commissioning Team members. Each contractor shall be responsible for following a Commissioning Plan to be issued by the Commissioning Agent and shall execute all Commissioning responsibilities assigned to them in this and all other related Contract Documents.

### 1.02 COMMISSION TEAM AND COMMISSIONING TERM DESCRIPTIONS

- A. Architect / Engineer (A/E): The prime consultant (architect) and sub-consultants who comprise the design team, generally the HVAC mechanical designer/engineer and the electrical designer/engineer.
- B. Commissioning authority (CA): An independent agent. The CA directs and coordinates the commissioning activities. The CA does not take an oversight role. The CA is part of the Director's team.
- C. Commissioning Plan (Cx Plan): An overall plan that provides the structure, schedule and coordination planning for the commissioning process.
- D. Commissioning Team (Cx Team): The members of the commissioning team consist of the Commissioning Authority, the Director's Representative, the Commissioning Team Contractors, Subcontractor's, equipment Vendors and the Architect and design Engineers. The owner and the building or plant operator/engineer also may be members of the commissioning team.
- E. Commissioning Team Contractor: (Cx Team Contractor) Contractors responsible for providing the systems specified for Commissioning in Section 019113 – General Commissioning Requirements, of their respective contracts. The Cx Team Contractors are totally responsible for their various Subcontractors and Vendors. Note that each system may have multiple Cx Team Contractors; i.e. - HVAC contractor installs a variable speed drive, and Electrical contractor provides power wiring to the drive.
- F. Director's Representative (DR): The OGS Project Manager or Engineer in Charge of the Construction project, hired and acting on behalf of the Owner.

- G. HVAC Contractor (HC): Cx Contractor responsible for all Commissioning activities associated with the HVAC contract, and all those of HVAC subcontractors and HVAC equipment vendors for Commissioned equipment supplied under the HVAC contract.
  - 1. Typical HVAC Subcontractors.
    - a. Testing and Air Balancing Contractor (TAB).
    - b. Controls Contractor (CC).
- H. Electrical Contractor (EC): Cx Contractor responsible for all Commissioning activities associated with the Electrical contract, and all those of Electrical subcontractors and Electrical equipment vendors for Commissioned equipment supplied under the Electrical contract.
- I. Owner: Client or facility representatives.
- J. Subcontractors (Subs): The subcontractors to the Cx Contractors who provide and install building components and systems.
- K. Vendor: Supplier of equipment.
- L. Functional Performance Test (FT): Test of the dynamic function and operation of equipment and systems using manual (direct observation) or monitoring methods. Functional testing is the dynamic testing of systems (rather than just components) under full operation. Systems are tested under various modes, such as during low cooling or heating loads, high loads, component failures, unoccupied, varying outside air temperatures, fire alarm, power failure, etc. The CA develops the functional test procedures in sequential written form. The CA coordinates, oversees and documents the actual testing. The Contractor performs the functional tests. FTs are performed after prefunctional checklists and startup are complete.
- M. Prefunctional Checklist (PC): A list of items to inspect and component tests to conduct to verify proper installation of equipment.
- N. Deferred Testing: Functional test procedures approved by the CA and DR to be performed after Functional Completion and post Substantial Completion of the project. Deferred testing may be required due to occupancy requirements, seasonal requirements for testing or deficiencies approved for correction at a later date by the DR.
- O. Functional Completion: Final written approval by the DR that all Commissioning work is complete.

# 1.03 SUMMARY

- A Commissioning: Commissioning is a systematic process of ensuring that (selected) building systems perform interactively according to the design intent and the Owner's operational needs. Commissioning during the construction phase is intended to achieve the following specific objectives according to the Contract Documents:
  - 1. Verify that applicable equipment and systems are installed according to the manufacturer's recommendations and to industry accepted minimum standards and that they receive adequate operational checkout by installing contractors.
  - 2. Verify and document proper performance of (selected) equipment and systems.
  - 3. Verify that O&M documentation left on site is complete.

- 4. Verify that the Owner's operating personnel are adequately trained.
- B. The commissioning process does not take away from or reduce the responsibility of the installing contractors to provide a finished and fully functioning product.

# 1.04 COMMISSIONING PROCESS

- A. Management:
  - The CA is hired by, and works for, the Director's Representative and/or Owner. The CA directs and coordinates the commissioning activities. All Commissioning Team members work together to fulfill their contracted responsibilities and to meet the objectives of the Contract Documents.
  - 2. It is noted that the services for the A/E and Commissioning Authority are not provided for in this contract. That is, the Cx Team contractors are not responsible for providing the CA's or A/E's services. Their responsibilities and tasks are listed in this Document to clarify the commissioning process.
- B. Commissioning Process: The following narrative provides a brief overview of the typical commissioning tasks during construction and the general order in which they occur.
  - 1. Commissioning begins prior to construction with a scoping meeting planned, scheduled and conducted by the CA where the commissioning process is reviewed with the commissioning team members. The CA will provide the initial schedule of primary commissioning events at the commissioning scoping meeting. Meeting minutes will be distributed to all parties by the CA.
  - 2. The CA will develop a commissioning plan to provide guidance in the execution of the commissioning process. A draft copy of the plan will be presented at the scoping meeting for discussion.
  - 3. The CA will work with the Cx Team contractors according to established protocols to list and schedule the commissioning activities, using his initial listing of events from the draft Cx Plan as a basis. The HC will integrate all commissioning activities into the Construction Progress or Master Schedule.
  - 4. Additional meetings will be required throughout construction, scheduled by the CA with necessary Commissioning Team members attending, to plan, scope, coordinate, schedule future activities and resolve deficiencies. These meetings will be held monthly or bi-weekly during initial construction and can increase in frequency to as often as one per week in the final months or critical periods of each phase of construction.
  - 5. After the initial commissioning scoping meeting the CA will update the plan which is then considered the "final" plan, though it may be revised as the project progresses. The Contract Specifications will take precedence over the Commissioning Plan.
  - 6. Equipment documentation, including O&M manuals are submitted to the CA during the submittal process, including detailed start-up procedures. The CA reviews the O&M documentation for completeness.
  - 7. The CA works with the Cx Team contractors and their subcontractors to develop startup plans and startup documentation formats for commissioned equipment and systems. This includes providing prefunctional checklists to be completed, during the startup process.
  - 8. The CA develops specific equipment and system functional performance test procedures. The Cx Team contractors and Subs review the procedures and submit suggestions or comments. Procedures are finalized by the CA.

- 9. The Cx Team contractors and their subcontractors, under their own direction, execute and document the prefunctional checklists and perform startup and initial checkout for all commissioned systems. The CA documents that the checklists and startup were completed according to the approved plans and will spot check selected equipment prior to performing functional testing.
- 10. The procedures for Functional Testing are executed by the Cx Team contractors and subcontractors, under the direction of, and documented by the CA.
- 11. In general, the checkout and performance verification proceeds from simple to complex; from component level to equipment to systems and intersystem levels with prefunctional checklists being completed before functional testing.
- 12. Items of non-compliance in material, installation or setup are corrected at the Cx Team contractors' expense and the system is retested.
- 13. Commissioning (Functional Completion) is completed before Project Substantial Completion.
- 14. The CA reviews, pre-approves and coordinates the training provided by the Cx Team contractors and their subcontractors and verifies that it is completed.
- 15. Deferred testing is conducted, as specified or required.

# 1.05 COMMISSIONING RESPONSIBILITIES

- A. All Commissioning Team Members:
  - 1. Follow the Commissioning Plan.
  - 2. Attend commissioning scoping meeting and additional meetings, as necessary.
- B. Architect/Engineer (A/E):
  - 1. **Pre-Construction and Construction Phase**:
    - a. Attend the commissioning scoping meeting and selected commissioning team meetings as needed.
    - b. Provide Design Intent and Basis of Design documents.
    - c. Provide any design narrative documentation requested by the CA.
    - d. Perform normal submittal review, construction observation as contracted.
    - e. Any on-site observations required by contract should be completed just prior to system startup.
    - f. Coordinate resolution of system deficiencies identified during commissioning, according to the contract documents.
    - g. Prepare and submit final as-built design intent documentation for inclusion in the O&M manuals.
- C. Commissioning Authority (CA):
  - 1. The CA is not responsible for design concept, design criteria, compliance with codes, design or construction scheduling, cost estimating, or construction management. The CA may assist with problem-solving, non-conformance or deficiencies, but ultimately that responsibility resides with the Director's Representative, the Cx Team contractors and the A/E. The primary role of the CA is to develop and coordinate the execution of a testing plan and to observe and document that systems are functioning in accordance with the documented design intent, in accordance with the Contract Documents. The Contractors will provide all tools or the use of tools to start, check-out and functionally test equipment and systems, except for specified testing with portable data-loggers, which shall be supplied and installed by the CA.

- 2. Pre-Construction and Construction Phase
  - a. Coordinates and directs the commissioning activities in a logical, sequential and efficient manner using consistent protocols and forms, centralized documentation, clear and regular communications and consultations with all necessary parties, frequently updated timelines, schedules and technical expertise.
  - b. Coordinate the commissioning work and, with the DR and Cx Team contractors, ensure that all commissioning activities are scheduled into the Construction Progress Schedule.
  - c. Plan and conduct a commissioning scoping meeting and other commissioning meetings.
  - d. Revise, as necessary, the Commissioning Plan.
  - e. Request and review information (including O&M materials) required to perform commissioning tasks and develop system start-up and checkout procedures.
  - f. Review and approve normal Contractor submittals applicable to systems being commissioned for compliance with commissioning needs, concurrent with the A/E reviews.
  - g. Develop an enhanced start-up and initial systems checkout plan with Cx Team contractors.
  - h. Write and distribute prefunctional tests and checklists.
  - i. With necessary assistance and review from installing contractors, write the functional performance test procedures for equipment and systems. This may include energy management control system trending, standalone data logger monitoring or manual functional testing. Submit to Cx Team contractors for review.
  - j. Perform site visits, as necessary, to observe component and system installations. Attend selected planning and job-site meetings to obtain information on construction progress. Review construction meeting minutes for revisions/substitutions relating to the commissioning process. Assist in resolving any discrepancies.
  - k. Witness all or part of any test, flushing or start-up procedures, sufficient to be confident that proper procedures were followed. Document this testing and include the documentation in O&M manuals. Notify Director's Representative of any deficiencies in results or procedures.
  - 1. Approve prefunctional tests and checklist completion by reviewing prefunctional checklist reports and by selected site observation and spot checking.
  - m. Approve system startup by reviewing start-up reports and by selected site observations.
  - n. Review TAB execution plan.
  - o. Oversee and approve functional testing of Commissioned systems.
  - p. Coordinate, witness, and approve manual functional performance tests performed by installing contractors. Coordinate retesting as necessary until satisfactory performance is achieved.
  - q. Analyze any functional performance trend logs and monitoring data to verify system performance.
  - r. Approve air and water systems balancing by spot testing, by reviewing completed reports or by selected site observation.

- s. Maintain a master deficiency and resolution log and a separate testing record. Provide the Director's Representative with written progress reports and test results with recommended actions.
- t. Review and approve the preparation of the O&M manuals.
- u. Review equipment warranties to ensure that the Director's responsibilities are clearly defined.
- v. Oversee and approve the training of the Owners operating personnel.
- w. Compile and maintain a commissioning record and building systems book(s).
- x. Provide a final commissioning report (as described in this Document).
- 3. Warranty Period:
  - a. Coordinate and supervise required seasonal or deferred testing.
  - b. Return to the site at 10 months into the 12 month warranty period and review with facility staff the current building operation and the condition of outstanding issues related to the original and seasonal commissioning. Also interview facility staff and identify problems or concerns they have operating the building as originally intended. Make suggestions for improvements and for recording these changes in the O&M manuals. Identify areas that may come under warranty or under the original construction contract. Assist facility staff in developing reports, documents and requests for services to remedy outstanding problems.
- D. Director's Representative:
  - 1. Pre-Construction and Construction Phase:
    - a. Manage the contract of the A/E and of the Cx Team contractors.
    - b. Attend a commissioning scoping meeting and other commissioning team meetings.
    - c. Arrange for facility operating and maintenance personnel to attend various field commissioning activities and field training sessions according to the Commissioning Plan.
    - d. Facilitate the coordination of the commissioning work by the CA and Cx Team contractors; ensure that commissioning activities are being scheduled into the Construction Progress schedule.
    - e. Review and approve the final Commissioning Plan.
    - f. Furnish a copy of all construction documents, addenda, change orders and approved submittals and shop drawings related to commissioned equipment to the CA.
    - g. Observe and witness prefunctional checklists, startup and functional testing of selected equipment.
    - h. Review commissioning progress and deficiency reports.
    - i. Coordinate the resolution of non-compliance and design deficiencies identified in all phases of commissioning.
    - j. Assist in coordinating the training of Owner's personnel.
    - k. Provide final approval for the completion of the commissioning work.
  - 2. Warranty Period:
    - a. Assist the CA as necessary in the seasonal or deferred testing.

- E. Commissioning Team Contractors (Includes Subcontractors and Vendors):
  - 1. Pre-Construction and Construction Phase
    - a. Designate in writing a company representative to act as "coordinator" for all commissioning activities. (Coordinator can be project supervisor or manager).
    - b. Facilitate the coordination of the commissioning work by the CA, and with the CA ensure that commissioning activities are being scheduled into the Construction Progress Schedule.
    - c. Include the cost of commissioning responsibilities in the total contract price. Provide requested documentation, prior to or during the submittal period (prior to normal O&M manual submittals), to the CA for development of start-up and functional testing procedures.
      - Typically this will include detailed manufacturer installation and start-up, operating, troubleshooting and maintenance procedures, fan and pump curves, full factory testing reports, if any, and full warranty information, including all responsibilities of the Owner to keep the warranty in force clearly identified. In addition, installation, start-up and checkout materials that are shipped inside the equipment and field checkout sheet forms to be used by the factory or field technicians shall be submitted to the Commissioning Agent.
      - 2) The Commissioning Agent may request further documentation necessary for the commissioning process.
    - d. In each purchase order or subcontract written, include appropriate requirements for submittal data, O&M data, commissioning tasks and training.
    - e. Ensure that all subcontractors execute their commissioning responsibilities according to the Contract Documents and schedule.
    - f. Provide a copy of the O&M manuals and submittals of commissioned equipment, through the DR, to the CA for review and approval.
    - g. Provide assistance to the CA in preparing the specific functional performance test procedures. The Cx Team contractors shall review test procedures to ensure feasibility, safety and equipment protection and provide necessary written alarm limits to be used during the tests. Assist in clarifying the operation and control of commissioned equipment in areas where the specifications, control drawings or equipment documentation is not sufficient for writing detailed testing procedures.
    - h. Develop a full start-up and testing plan using manufacturer's start-up procedures and the prefunctional checklists from the CA for all commissioned equipment. Submit to CA for review and approval prior to startup.
    - i. During the startup and initial checkout process, execute all portions of the prefunctional checklists for all commissioned equipment.
    - j. Perform and clearly document all completed startup and system operational checkout procedures, providing a copy to the CA.
    - k. Address current punch list items before functional testing. Air and water TAB shall be completed with deficiencies and problems remedied before functional testing of the respective air- or water-related systems.
    - 1. Provide skilled technicians to execute starting of equipment and to execute the functional performance tests under the direction of the CA. Ensure that they are available and present during the agreed upon

schedules and for sufficient duration to complete the necessary tests, adjustments and problem-solving. Assist the CA in interpreting the monitoring data, as necessary.

- m. Correct deficiencies (differences between specified and observed performance) as interpreted by the CA, Director's Representative and A/E and retest the equipment.
- n. Prepare O&M manuals according to the Contract Documents, including clarifying and updating the original sequences of operation to as-built conditions.
- o. Coordinate with equipment manufacturers to determine specific requirements to maintain the validity of all warranties.
- p. During construction, maintain as-built red-line drawings for all drawings and provide final CAD as-builts for contractor-generated coordination drawings. Update after completion of commissioning (excluding deferred testing).
- q. Provide training of the Owners operating staff using expert qualified personnel, as specified.
- 2. Warranty Period
  - a. Execute seasonal or deferred functional performance testing, witnessed by the CA, according to the specifications.
  - b. Ensure that Cx Team contractors correct deficiencies and make necessary adjustments to O&M manuals and as-built drawings for applicable issues identified in any seasonal testing.
- F. Vendors:
  - 1. Provide all requested submittal data, including detailed start-up procedures and specific responsibilities for the Owner to keep warranties in force.
  - 2. Provide information requested by CA regarding equipment sequence of operation and testing procedures.
  - 3. Through the contractors they supply products to, analyze specified products and verify that the designer has specified the newest most updated equipment reasonable for this project's scope and budget.
  - 4. Review test procedures for equipment installed by factory representatives.
  - 5. Assist in equipment testing per agreements with the Cx Team contractors and subcontractors.
  - 6. Include all special tools and instruments (only available from vendor and specific to a piece of equipment) required for testing equipment according to these Contract Documents, except for stand-alone data logging equipment that may be used by the CA.

# 1.06 **PREREQUISITES TO FUNCTIONAL COMPLETION**

- A. All Commissioning must be complete prior to Functional Completion, unless approved in writing by the Director's Representative. Exceptions to this are planned system training performed after occupancy and any required seasonal or approved deferred testing. This includes for all systems, but is not limited to:
  - 1. Completed and signed start-up and prefunctional checklist documentation.
  - 2. Requested trend log data
  - 3. Submission of final approved TAB report.
  - 4. Completion of all required controls work.
  - 5. Completion of all functional testing.

- 6. Required training of O&M personnel completed and approved.
- 7. Submission of the approved O&M manuals.
- 8. All identified deficiencies have been corrected or are approved as exceptions to this milestone by the Director's Representative.
- B. The Director's Representative will determine the date of Functional Completion after reviewing the Commissioning Agent's recommendation for Functional Completion.

# PART 2 - PRODUCTS (Not Used)

# PART 3 - EXECUTION

# 3.01 REPORTING

- A. The CA will provide regular reports to the DR with increasing frequency as construction and commissioning progresses. Standard forms will be provided and/or referenced in the Commissioning Plan.
- B. The CA will regularly communicate with all members of the commissioning team, keeping them apprised of commissioning progress and scheduling changes through memos, progress reports, etc.
- C. Testing or review approvals and non-conformance and deficiency reports are made regularly.
- D. A final summary report by the CA will be provided to the DR, focusing on evaluating commissioning process issues and identifying areas where the process could be improved. All acquired documentation, logs, minutes, reports, deficiency lists, communications, findings, unresolved issues, etc., will be compiled in appendices and provided with the summary report. Prefunctional checklists, functional tests and monitoring reports will not be part of the final report, but will be stored in the Commissioning Record in the O&M manuals.

# 3.02 SUBMITTALS

A. The CA will provide appropriate contractors with a specific request for the type of submittal documentation the CA requires to facilitate the commissioning work. These requests will be integrated into the normal submittal process and protocol of the construction team. At minimum, the request will include the manufacturer and model number, the manufacturer's printed installation and detailed start-up procedures, full sequences of operation, O&M data, performance data, any performance test procedures, control drawings, wiring diagrams and details of factory tests. In addition, the installation and checkout materials that are shipped inside the equipment and the field checkout sheet forms to be used by the factory or field technicians shall be submitted to the Commissioning authority. All documentation requested by the CA will be included by the Cx Team contractors in their O&M manual contributions.

- B. The CA may request additional design narrative from the A/E and the Cx Team Contractors, depending on the completeness of the design intent documentation and sequences provided with the Specifications.
- C. The Commissioning authority will review and approve submittals related to the commissioned equipment for conformance to the Contract Documents as it relates to the commissioning process, to the functional performance of the equipment and adequacy for developing test procedures. This review is intended primarily to aid in the development of functional testing procedures and only secondarily to verify compliance with equipment specifications. The Commissioning authority will notify the DR of items missing or areas that are not in conformance with Contract Documents which may affect the commissioning and which require resubmission.
- D. Submittals to the CA do not constitute compliance for O&M manual documentation. The compilation and submission of O&M manuals is the responsibility of the Contractor. The CA will review and approve individual O&M documents.

# 3.03 START-UP, PREFUNCTIONAL CHECKLISTS AND INITIAL CHECKOUT

- A. The following procedures apply to all equipment to be commissioned.
- B. The project will require startup and initial checkout to be executed in phases. This phasing will be planned and scheduled in a coordination meeting of the CA, DR and the Cx Team contractors. Results will be added to the Construction Progress Schedule and Commissioning Plan.
- C. General. Prefunctional checklists are important to ensure that the equipment and systems are installed and operational. It ensures that functional performance testing (in-depth system checkout) may proceed without unnecessary delays. The prefunctional testing for a given system must be successfully completed prior to formal functional performance testing of equipment or subsystems of the given system.
- D. Start-up and Initial Checkout Plan. The CA shall assist the Commissioning Team contractors responsible for startup of any equipment in developing detailed start-up plans. The primary role of the CA in this process is to ensure that there is written documentation that each of the manufacturer-recommended procedures have been completed.
  - 1. The prefunctional checklists and procedures indicate required procedures to be executed as part of startup and initial checkout of the systems and the party responsible for their execution.
  - 2. The prefunctional checklists and tests are provided by the CA to the Contractor. The Contractor determines which trade is responsible for executing and documenting each of the line item tasks and notes that trade on the form. Each form will have more than one trade responsible for its execution.
  - 3. Any Cx Team contractor responsible for providing equipment and systems designated for Commissioning, develops the full start-up plan by combining (or adding to) the CA's prefunctional checklists with the manufacturer's detailed start-up and checkout procedures. The Cx Team contractor shall make use of the manufacturers O&M manual and the normally used field checkout sheets in developing the complete start-up plan. The plan will include checklists and procedures with specific boxes or lines for recording and documenting the checking and inspections of each procedure and a summary statement with a signature block at the end of the plan. The full start-up plan could consist of something as simple as:

- a. The CA's prefunctional checklists.
- b. The manufacturer's standard written start-up procedures copied from the installation manuals with check boxes by each procedure and a signature block added by hand at the end.
  - The manufacturer's normally used field checkout sheets.
- The contractor submits the full startup plan to the CA for review and approval.
- 5. The CA reviews and approves the procedures and the format for documenting them, noting any procedures that need to be added.
- 6. The full start-up procedures and the approval form may be provided to the DR for review and approval, depending on management protocol.
- E. Execution of Prefunctional Checklists and Startup.

c.

4.

- 1. Prior to startup, the Cx Team contractors, subcontractors and vendors schedule startup and checkout with the DR and CA. The performance of the prefunctional checklists, startup and checkout are directed and executed by the Cx Team Contractor, subcontractor or Vendor responsible for the equipment.
- 2. The CA shall observe, at minimum, the procedures for each piece of primary equipment, unless there are multiple units, (in which case a sampling strategy may be used as approved by the DR). In no case will the number of units witnessed be less than four nor less than 20% of the total number of identical or very similar units.
- 3. For lower-level components of equipment, (e.g., VAV boxes, sensors, controllers), the CA shall observe a sampling of the prefunctional and start-up procedures. The sampling procedures are identified in the commissioning plan.
- 4. The Cx Team contractors, subcontractors and vendors shall execute startup and provide the CA with a signed and dated copy of the completed start-up and prefunctional tests and checklists.
- 5. Only individuals that have direct knowledge and witnessed that a line item task on the prefunctional checklist was performed shall initial or check that item off.
- F. Deficiencies, Non-Conformance and Approval in Checklists and Startup.
  - 1. The contractors shall clearly list any outstanding items of the initial start-up and prefunctional procedures that were not completed successfully, at the bottom of the procedures form or on an attached sheet. The procedures form and any outstanding deficiencies are provided to the CA within two days of test completion.
  - 2. The CA reviews the report and submits either a non-compliance report or an approval form to the DR. The installing Cx Team contractors, subcontractors or vendors shall correct all areas that are deficient or incomplete in the checklists and tests in a timely manner, and shall notify the CA as soon as outstanding items have been corrected and resubmit an updated start-up report and a Statement of Correction on the original non-compliance report. When satisfactorily completed, the CA recommends approval of the execution of the checklists and startup of each system to the DR using a standard form.
  - 3. Items left incomplete, which later cause deficiencies or delays during functional testing may result in back-charges to the responsible party.
- G. Functional testing is intended to begin upon completion of a system. Functional testing may proceed prior to the completion of systems or sub-systems at the discretion of the CA and DR. Beginning system testing before full completion does not relieve the Contractor from fully completing the system, including all prefunctional checklists as soon as possible.

H. The Cx Team contractors have start-up, prefunctional and functional testing responsibility and are required to complete systems and sub-systems so they are fully functional, meeting the design objectives of the Contract Documents. The commissioning procedures and functional testing do not relieve or lessen this responsibility or shift that responsibility partially to the Commissioning Agent or Director's Representative.

# 3.04 FUNCTIONAL PERFORMANCE TESTING

- A. This article applies to all commissioning functional testing for all divisions.
- B. Objectives and Scope.
  - 1. The objective of functional performance testing is to demonstrate that each system is operating according to the documented design intent and Contract Documents. Functional testing facilitates bringing the systems from a state of physical completion to full dynamic operation. Additionally, during the testing process, areas of deficient performance are identified and corrected, improving the operation and functioning of the systems. In general, each system should be operated through all modes of operation (seasonal, occupied, unoccupied, warmup, cool-down, part- and full-load) where there is a specified system response. Verifying each sequence in the sequences of operation is required. Proper responses to such modes and conditions as power failure, freeze condition, low oil pressure, no flow, equipment failure, etc. shall also be tested.
- C. Test Methods.
  - 1. Functional performance testing and verification may be achieved by manual testing (persons manipulate the equipment and observe performance). When a control system is part of the project, functional performance testing may use the controls to monitor the performance and analyze the results using the control system's trend log capabilities or by stand-alone data loggers. The CA may substitute specified methods or require an additional method to be executed, other than what was specified, with the approval of the DR. The CA will determine which method is most appropriate for tests that do not have a method specified.
  - 2. Setup. Each function and test shall be performed under conditions that simulate actual conditions as close as is practically possible. The Contractor executing the test shall provide all necessary materials, system modifications, etc. to produce the necessary flows, pressures, temperatures, etc. necessary to execute the test according to the specified conditions. At completion of the test, the Contractor shall return all affected building equipment and systems, due to these temporary modifications, to their pre-test condition.
  - 3. Simulated Conditions. Simulating conditions (not by an overwritten value) shall be allowed, though timing the testing to experience actual conditions is encouraged wherever practical.
  - 4. Overwritten Values. Overwriting sensor values to simulate a condition, such as overwriting the outside air temperature reading in a control system to be something other than it really is, shall be allowed, but shall be used with caution and avoided when possible. Such testing methods often can only test a part of a system, as the interactions and responses of other systems will be erroneous or not applicable. Simulating a condition is preferable (i.e., for the above case, the outside air sensor could be heated with a hair blower rather than overwriting the

value, or by altering the appropriate setpoint to see the desired response). Before simulating conditions or overwriting values, sensors, transducers and devices shall have been calibrated.

- 5. Simulated Signals. Using a signal generator which creates a simulated signal to test and calibrate transducers and DDC constants is generally recommended over using the sensor to act as the signal generator via simulated conditions or overwritten values.
- 6. Altering Setpoints. Rather than overwriting sensor values, and when simulating conditions is difficult, altering setpoints to test a sequence is acceptable. For example, to see the AC compressor lockout work at an outside air temperature below 55F, when the outside air temperature is above 55F, temporarily change the lockout setpoint to be 2F above the current outside air temperature.
- 7. Indirect Indicators. Relying on indirect indicators for responses or performance shall be allowed only after visually and directly verifying and documenting, over the range of the tested parameters, that the indirect readings through the control system represent actual conditions and responses. Much of this verification is completed during prefunctional testing.
- D. Problem Solving. The CA will recommend solutions to testing problems; however the burden of responsibility to solve, correct and retest problems is with the Cx Team contractors, subcontractors and A/E.

# 3.05 DOCUMENTATION, NON-CONFORMANCE AND APPROVAL OF TESTS

- A. Documentation.
  - 1. The CA shall witness and document the results of all functional performance tests using the specific procedural forms developed for that purpose. Prior to testing, these forms are provided to the DR for review and approval and to the Cx Team contractors for review. The CA will include the filled out forms in the Final Commissioning Report.
- B. Non-Conformance.
  - 1. The CA will record the results of the functional test on the procedure or test form. All deficiencies or non-conformance issues shall be noted and reported to the DR.
  - 2. Corrections of minor deficiencies identified may be made during the tests at the discretion of the CA. In such cases the deficiency and resolution will be documented on the procedure form.
  - 3. Every effort will be made to expedite the testing process and minimize unnecessary delays, while not compromising the integrity of the procedures.
  - 4. As tests progress and a deficiency is identified, the CA discusses the issue with the executing contractor.
    - a. When there is no dispute on the deficiency and the Contractor accepts responsibility to correct it:
      - The CA documents the deficiency and the Contractor's response and intentions and they go on to another test or sequence. The CA submits the non-compliance reports to the DR for signature, if required. A copy is provided to the Cx Team contractors and CA. The Cx Team contractors correct the deficiency, sign the statement of correction at the bottom of the non-compliance form certifying that the equipment is ready to be retested and send it back to the CA.

- 2) The CA reschedules the test and the test is repeated.
- b. If there is a dispute about a deficiency, regarding whether it is a deficiency or who is responsible:
  - 1) The deficiency shall be documented on the non-compliance form with the Cx Team contractor's response and a copy given to the DR and to the Cx Team contractor.
  - 2) Resolutions are made at the lowest management level possible. Other parties are brought into the discussions as needed. Final interpretive authority is with the DR. Final acceptance authority is with the DR.
  - 3) Once the interpretation and resolution have been decided, the appropriate party corrects the deficiency, signs the statement of correction on the non-compliance form and provides it to the CA. The Contractor reschedules the test and the test is repeated until satisfactory performance is achieved.
- 5. Cost of Retesting.
  - a. The cost for the Cx Team contractor to retest a prefunctional or functional test, if they are responsible for the deficiency, shall be theirs. If they are not responsible, any cost recovery for retesting costs shall be negotiated with the DR.
  - b. For a deficiency identified, not related to any prefunctional checklist or start-up fault, the following shall apply: The CA will direct the retesting of the equipment once at no "charge" to the project for their time. However, the CA's time for a second retest will be charged to the Cx Team contractors.
  - c. The time for the CA to direct, attend or witness any retesting required because a specific prefunctional checklist or start-up test item, reported to have been successfully completed, but determined during functional testing to be faulty, will be back-charged to the Cx Team contractors.
- 6. The Contractor shall respond in writing to the CA and DR concerning the status of each apparent outstanding discrepancy identified during commissioning. Discussion shall cover explanations of any disagreements and proposals for their resolution.
- 7. The CA retains the original non-conformance forms until the end of the project.
- 8. Any required retesting by any contractor shall not be considered a justified reason for a claim of delay or for a time extension by the prime contractor.
- C. Failure Due to Manufacturer Defect:
  - 1. If 10 percent, or three units, whichever is greater, of identical pieces (size alone does not constitute a difference) of equipment fail to perform to the Contract Documents (mechanically or substantively) due to manufacturing defect, not allowing it to meet its submitted performance specification, all identical units may be considered unacceptable by the DR. In such case, the Contractor shall provide the Director's Representative with the following:
    - a. Within one week of notification from the DR, the Contractor or manufacturer's representative shall examine all other identical units making a record of the findings. Within two weeks of the original notice, a signed and dated, written explanation of the findings, problems, cause of failures, etc. and all proposed solutions shall be provided to the DR. The proposed solutions shall not significantly exceed the specification requirements of the original installation.

- b. The DR will determine whether a replacement of all identical units or a repair is acceptable.
- c. Two examples of the proposed solution will be installed by the Contractor and the installations will be tested for up to one week, upon which the DR and CA will decide whether to accept the solution.
- d. Upon acceptance, the Contractor and/or manufacturer shall replace or repair all identical items, at their expense and extend the warranty accordingly, if the original equipment warranty had begun. The replacement/repair work shall proceed with reasonable speed beginning within one week from when parts can be obtained.
- D. Approval:
  - 1. The CA notes each satisfactorily demonstrated function on the test form. Formal approval of the functional test is made later after review by the CA and by the DR, if necessary. The CA recommends acceptance of each test to the DR using a standard form. The DR gives final approval on each test using the same form, providing a signed copy to the CA and the Contractor.

# 3.06 OPERATION AND MAINTENANCE MANUALS

- A. Standard O&M Manuals.
  - 1. Additional content and format requirements for the standard O&M manuals are detailed in Section 017716 and individual equipment sections.
  - 2. The following O&M manual requirements do not replace O&M manual documentation requirements elsewhere in these specifications.
- B. Review and Approvals.
  - 1. CA Review and Approval. Prior to substantial completion, the CA shall review the O&M manuals, documentation and redline as-builts for systems that were commissioned, concurrently with the A/E. The CA will communicate concerns about the manuals to the DR. Upon a successful review of the corrections, the CA recommends approval and acceptance of these Sections, with respect to the commissioning, to the DR. The CA also reviews each equipment warranty and verifies that all requirements to keep the warranty valid are clearly stated. This work does not supersede the A/E's review of the O&M manuals according to the A/E's contract.

# 3.07 TRAINING OF OWNERS OPERATING AND MAINTENANCE PERSONNEL

- A. The Cx Team contractors and CA shall be responsible for training coordination, scheduling and ultimately for ensuring that training is completed.
- B. The CA shall be responsible for reviewing and approving the content and adequacy of the training of Owners personnel for commissioned equipment.
  - 1. Hands-on training shall include start-up, operation in all modes possible, including manual, shut-down and any emergency procedures and preventative maintenance for all pieces of equipment.
  - 2. Training shall occur after functional testing is complete, unless approved otherwise by the DR.

3. Duration of Training: The Cx Team contractor shall provide training on each piece of equipment according to the durations in individual equipment specifications.

# 3.08 DEFERRED TESTING


- A. Unforeseen Deferred Tests:
  - 1. If any check or test cannot be completed due to the building structure, required occupancy condition or other deficiency, execution of checklists and functional testing may be delayed upon approval of the DR. These tests will be conducted in the same manner as the seasonal tests as soon as possible. Services of necessary contractors, vendors etc., will be negotiated.
- B. Seasonal Testing:
  - 1. During the warranty period, seasonal testing (tests delayed until weather conditions are closer to the system's design) specified in Section 019113 shall be completed as part of this contract. The CA shall coordinate this activity. Tests will be executed, documented and deficiencies corrected by the appropriate contractors, with facilities staff and the CA witnessing. Any final adjustments to the O&M manuals and as-builds due to testing will be made.

# 3.09 WRITTEN WORK PRODUCTS

- A. The commissioning process generates a number of written work products described in various Sections of the Specifications. The Commissioning Plan lists all the formal written work products, describes briefly their contents, who is responsible to create them, their due dates, who receives and approves them and the location of the specification to create them. In summary, the written products are:
  - 1. Product Developed By:
    - a. Final Commissioning Plan: CA.
    - b. Commissioning Meeting Minutes: CA.
    - c. Commissioning Schedules: CA with Cx Team contractors and DR.
    - d. Equipment Documentation Submittals: Cx Team contractors.
    - e. Sequence Clarifications: Cx Team contractors, and A/E as needed.
    - f. Prefunctional Checklists: CA.
    - g. Startup and Initial Checkout Plan: Cx Team contractors and CA (compilation of documents).
    - h. Startup and Initial Checkout Forms Filled Out: Cx Team contractors.
    - i. Final TAB Report: TAB.
    - j. Issues Log (deficiencies): CA.
    - k. Commissioning Progress Record: CA.
    - 1. Deficiency Reports: CA.
    - m. Functional Test Forms: CA.
    - n. Filled Out Functional Tests: CA.
    - o. O&M Manuals: Cx Team contractors.
    - p. Commissioning Record Book: CA.
    - q. Overall Training Plan: CA and Cx Team contractors.
    - r. Specific Training Agendas: Cx Team contractors.
    - s. Final Commissioning Report: CA.
    - t. Miscellaneous Approvals: CA.

# **END OF SECTION**

Roberta Reardon, Commissioner





Angela Lewis, Administrative Assistant Contract Management 35th Fl. Corning Tower Empire State Plaza Albany NY 12242

Schedule Year Date Requested 12/26/2023 PRC#

2023 through 2024 2023014800

Cook Chill Production Center Location Proiect ID# 47430 Project Type Replace Building Chillers, Building 144

# PREVAILING WAGE SCHEDULE FOR ARTICLE 8 PUBLIC WORK PROJECT

Attached is the current schedule(s) of the prevailing wage rates and prevailing hourly supplements for the project referenced above. A unique Prevailing Wage Case Number (PRC#) has been assigned to the schedule(s) for your project.

The schedule is effective from July 2023 through June 2024. All updates, corrections, posted on the 1st business day of each month, and future copies of the annual determination are available on the Department's website www.labor.ny.gov. Updated PDF copies of your schedule can be accessed by entering your assigned PRC# at the proper location on the website.

It is the responsibility of the contracting agency or its agent to annex and make part, the attached schedule, to the specifications for this project, when it is advertised for bids and /or to forward said schedules to the successful bidder(s), immediately upon receipt, in order to insure the proper payment of wades.

Please refer to the "General Provisions of Laws Covering Workers on Public Work Contracts" provided with this schedule, for the specific details relating to other responsibilities of the Department of Jurisdiction.

Upon completion or cancellation of this project, enter the required information and mail **OR** fax this form to the office shown at the bottom of this notice. OR fill out the electronic version via the NYSDOL website.

# NOTICE OF COMPLETION / CANCELLATION OF PROJECT

Date Completed:

Date Cancelled: \_

Name & Title of Representative: \_

Phone: (518) 457-5589 Fax: (518) 485-1870 W. Averell Harriman State Office Campus, Bldg. 12, Room 130, Albany, NY 12226

# General Provisions of Laws Covering Workers on Article 8 Public Work Contracts

# Introduction

The Labor Law requires public work contractors and subcontractors to pay laborers, workers, or mechanics employed in the performance of a public work contract not less than the prevailing rate of wage and supplements (fringe benefits) in the locality where the work is performed.

# **Responsibilities of the Department of Jurisdiction**

A Department of Jurisdiction (Contracting Agency) includes a state department, agency, board or commission: a county, city, town or village; a school district, board of education or board of cooperative educational services; a sewer, water, fire, improvement and other district corporation; a public benefit corporation; and a public authority awarding a public work contract.

The Department of Jurisdiction (Contracting Agency) awarding a public work contract MUST obtain a Prevailing Rate Schedule listing the hourly rates of wages and supplements due the workers to be employed on a public work project. This schedule may be obtained by completing and forwarding a "Request for wage and Supplement Information" form (PW 39) to the Bureau of Public Work. The Prevailing Rate Schedule MUST be included in the specifications for the contract to be awarded and is deemed part of the public work contract.

Upon the awarding of the contract, the law requires that the Department of Jurisdiction (Contracting Agency) furnish the following information to the Bureau: the name and address of the contractor, the date the contract was let and the approximate dollar value of the contract. To facilitate compliance with this provision of the Labor Law, a copy of the Department's "Notice of Contract Award" form (PW 16) is provided with the original Prevailing Rate Schedule.

The Department of Jurisdiction (Contracting Agency) is required to notify the Bureau of the completion or cancellation of any public work project. The Department's PW 200 form is provided for that purpose.

Both the PW 16 and PW 200 forms are available for completion online.

## Hours

No laborer, worker, or mechanic in the employ of a contractor or subcontractor engaged in the performance of any public work project shall be permitted to work more than eight hours in any day or more than five days in any week, except in cases of extraordinary emergency. The contractor and the Department of Jurisdiction (Contracting Agency) may apply to the Bureau of Public Work for a dispensation permitting workers to work additional hours or days per week on a particular public work project.

# Wages and Supplements

The wages and supplements to be paid and/or provided to laborers, workers, and mechanics employed on a public work project shall be not less than those listed in the current Prevailing Rate Schedule for the locality where the work is performed. If a prime contractor on a public work project has not been provided with a Prevailing Rate Schedule, the contractor must notify the Department of Jurisdiction (Contracting Agency) who in turn must request an original Prevailing Rate Schedule form the Bureau of Public Work. Requests may be submitted by: mail to NYSDOL, Bureau of Public Work, State Office Bldg. Campus, Bldg. 12, Rm. 130, Albany, NY 12226; Fax to Bureau of Public Work (518) 485-1870; or electronically at the NYSDOL website www.labor.ny.gov.

Upon receiving the original schedule, the Department of Jurisdiction (Contracting Agency) is REQUIRED to provide complete copies to all prime contractors who in turn MUST, by law, provide copies of all applicable county schedules to each subcontractor and obtain from each subcontractor, an affidavit certifying such schedules were received. If the original schedule expired, the contractor may obtain a copy of the new annual determination from the NYSDOL website www.labor.ny.gov.

The Commissioner of Labor makes an annual determination of the prevailing rates. This determination is in effect from July 1st through June 30th of the following year. The annual determination is available on the NYSDOL website www.labor.ny.gov.

# **Payrolls and Payroll Records**

Every contractor and subcontractor MUST keep original payrolls or transcripts subscribed and affirmed as true under penalty of perjury. As per Article 6 of the Labor law, contractors and subcontractors are required to establish, maintain, and preserve for not less than six (6) years, contemperaneous, true, and accurate payroll records. At a minimum, payrolls must show the following information for each person employed on a public work project: Name, Address, Last 4 Digits of Social Security Number, Classification(s) in which the worker was employed, Hourly wage rate(s) paid, Supplements paid or provided, and Daily and weekly number of hours worked in each classification.

The filing of payrolls to the Department of Jurisdiction is a condition of payment. Every contractor and subcontractor shall submit to the Department of Jurisdiction (Contracting Agency), within thirty (30) days after issuance of its first payroll and every thirty (30) days thereafter, a transcript of the original payrolls, subscribed and affirmed as true under penalty of perjury. The Department of Jurisdiction (Contracting Agency) shall collect, review for facial validity, and maintain such payrolls.

In addition, the Commissioner of Labor may require contractors to furnish, with ten (10) days of a request, payroll records sworn to as their validity and accuracy for public work and private work. Payroll records include, but are not limited to time cards, work description sheets, proof that supplements were provided, cancelled payroll checks and payrolls. Failure to provide the requested information within the allotted ten (10) days will result in the withholding of up to 25% of the contract, not to exceed \$100,000.00. If the contractor or subcontractor does not maintain a place of business in New York State and the amount of the contract exceeds \$25,000.00, payroll records and certifications must be kept on the project worksite.

The prime contractor is responsible for any underpayments of prevailing wages or supplements by any subcontractor.

All contractors or their subcontractors shall provide to their subcontractors a copy of the Prevailing Rate Schedule specified in the public work contract as well as any subsequently issued schedules. A failure to provide these schedules by a contractor or subcontractor is a violation of Article 8, Section 220-a of the Labor Law.

All subcontractors engaged by a public work project contractor or its subcontractor, upon receipt of the original schedule and any subsequently issued schedules, shall provide to such contractor a verified statement attesting that the subcontractor has received the Prevailing Rate Schedule and will pay or provide the applicable rates of wages and supplements specified therein. (See NYS Labor Laws, Article 8. Section 220-a).

# Determination of Prevailing Wage and Supplement Rate Updates Applicable to All Counties

The wages and supplements contained in the annual determination become effective July 1st whether or not the new determination has been received by a given contractor. Care should be taken to review the rates for obvious errors. Any corrections should be brought to the Department's attention immediately. It is the responsibility of the public work contractor to use the proper rates. If there is a question on the proper classification to be used, please call the district office located nearest the project. Any errors in the annual determination will be corrected and posted to the NYSDOL website on the first business day of each month. Contractors are responsible for paying these updated rates as well, retroactive to July 1st.

When you review the schedule for a particular occupation, your attention should be directed to the dates above the column of rates. These are the dates for which a given set of rates is effective. To the extent possible, the Department posts rates in its possession that cover periods of time beyond the July 1st to June 30th time frame covered by a particular annual determination. Rates that extend beyond that instant time period are informational ONLY and may be updated in future annual determinations that actually cover the then appropriate July 1st to June 30th time period.

# Withholding of Payments

When a complaint is filed with the Commissioner of Labor alleging the failure of a contractor or subcontractor to pay or provide the prevailing wages or supplements, or when the Commissioner of Labor believes that unpaid wages or supplements may be due, payments on the public work contract shall be withheld from the prime contractor in a sufficient amount to satisfy the alleged unpaid wages and supplements, including interest and civil penalty, pending a final determination.

When the Bureau of Public Work finds that a contractor or subcontractor on a public work project failed to pay or provide the requisite prevailing wages or supplements, the Bureau is authorized by Sections 220-b and 235.2 of the Labor Law to so notify the financial officer of the Department of Jurisdiction (Contracting Agency) that awarded the public work contract. Such officer MUST then withhold or cause to be withheld from any payment due the prime contractor on account of such contract the amount indicated by the Bureau as sufficient to satisfy the unpaid wages and supplements, including interest and any civil penalty that may be assessed by the Commissioner of Labor. The withholding continues until there is a final determination of the underpayment by the Commissioner of Labor or by the court in the event a legal proceeding is instituted for review of the determination of the Commissioner of Labor.

The Department of Jurisdiction (Contracting Agency) shall comply with this order of the Commissioner of Labor or of the court with respect to the release of the funds so withheld.

# **Summary of Notice Posting Requirements**

The current Prevailing Rate Schedule must be posted in a prominent and accessible place on the site of the public work project. The prevailing wage schedule must be encased in, or constructed of, materials capable of withstanding adverse weather conditions and be titled "PREVAILING RATE OF WAGES" in letters no smaller than two (2) inches by two (2) inches.

The "Public Work Project" notice must be posted at the beginning of the performance of every public work contract, on each job site.

Every employer providing workers. compensation insurance and disability benefits must post notices of such coverage in the format prescribed by the Workers. Compensation Board in a conspicuous place on the jobsite.

Every employer subject to the NYS Human Rights Law must conspicuously post at its offices, places of employment, or employment training centers, notices furnished by the State Division of Human Rights.

Employers liable for contributions under the Unemployment Insurance Law must conspicuously post on the jobsite notices furnished by the NYS Department of Labor.

# **Apprentices**

Employees cannot be paid apprentice rates unless they are individually registered in a program registered with the NYS Commissioner of Labor. The allowable ratio of apprentices to journeyworkers in any craft classification can be no greater than the statewide building trade ratios promulgated by the Department of Labor and included with the Prevailing Rate Schedule. An employee listed on a payroll as an apprentice who is not registered as above or is performing work outside the classification of work for which the apprentice is indentured, must be paid the prevailing journeyworker's wage rate for the classification of work the employee is actually performing.

NYSDOL Labor Law, Article 8, Section 220-3, require that only apprentices individually registered with the NYS Department of Labor may be paid apprenticeship rates on a public work project. No other Federal or State Agency of office registers apprentices in New York State.

Persons wishing to verify the apprentice registration of any person must do so in writing by mail, to the NYSDOL Office of Employability Development / Apprenticeship Training, State Office Bldg. Campus, Bldg. 12, Albany, NY 12226 or by Fax to NYSDOL Apprenticeship Training (518) 457-7154. All requests for verification must include the name and social security number of the person for whom the information is requested.

The only conclusive proof of individual apprentice registration is written verification from the NYSDOL Apprenticeship Training Albany Central office. Neither Federal nor State Apprenticeship Training offices outside of Albany can provide conclusive registration information.

It should be noted that the existence of a registered apprenticeship program is not conclusive proof that any person is registered in that program. Furthermore, the existence or possession of wallet cards, identification cards, or copies of state forms is not conclusive proof of the registration of any person as an apprentice.

# **Interest and Penalties**

In the event that an underpayment of wages and/or supplements is found:

- Interest shall be assessed at the rate then in effect as prescribed by the Superintendent of Banks pursuant to section 14-a of the Banking Law, per annum from the date of underpayment to the date restitution is made.
- A Civil Penalty may also be assessed, not to exceed 25% of the total of wages, supplements, and interest due.

## Debarment

Any contractor or subcontractor and/or its successor shall be ineligible to submit a bid on or be awarded any public work contract or subcontract with any state, municipal corporation or public body for a period of five (5) years when:

- Two (2) willful determinations have been rendered against that contractor or subcontractor and/or its successor within any consecutive six (6) year period.
- There is any willful determination that involves the falsification of payroll records or the kickback of wages or supplements.

# **Criminal Sanctions**

Willful violations of the Prevailing Wage Law (Article 8 of the Labor Law) may be a felony punishable by fine or imprisonment of up to 15 years, or both.

# Discrimination

No employee or applicant for employment may be discriminated against on account of age, race, creed, color, national origin, sex, disability or marital status.

No contractor, subcontractor nor any person acting on its behalf, shall by reason of race, creed, color, disability, sex or national origin discriminate against any citizen of the State of New York who is qualified and available to perform the work to which the employment relates (NYS Labor Law, Article 8, Section 220-e(a)).

No contractor, subcontractor, nor any person acting on its behalf, shall in any manner, discriminate against or intimidate any employee on account of race, creed, color, disability, sex, or national origin (NYS Labor Law, Article 8, Section 220e(b) ). The Human Rights Law also prohibits discrimination in employment because of age, marital status, or religion.

There may be deducted from the amount payable to the contractor under the contract a penalty of \$50.00 for each calendar day during which such person was discriminated against or intimidated in violation of the provision of the contract (NYS Labor Law, Article 8, Section 220-e(c)).

The contract may be cancelled or terminated by the State or municipality. All monies due or to become due thereunder may be forfeited for a second or any subsequent violation of the terms or conditions of the anti-discrimination sections of the contract (NYS Labor Law, Article 8, Section 220-e(d)).

Every employer subject to the New York State Human Rights Law must conspicuously post at its offices, places of employment, or employment training centers notices furnished by the State Division of Human Rights.

# Workers' Compensation

In accordance with Section 142 of the State Finance Law, the contractor shall maintain coverage during the life of the contract for the benefit of such employees as required by the provisions of the New York State Workers' Compensation Law.

A contractor who is awarded a public work contract must provide proof of workers' compensation coverage prior to being allowed to begin work.

The insurance policy must be issued by a company authorized to provide workers' compensation coverage in New York State. Proof of coverage must be on form C-105.2 (Certificate of Workers' Compensation Insurance) and must name this agency as a certificate holder.

If New York State coverage is added to an existing out-of-state policy, it can only be added to a policy from a company authorized to write workers' compensation coverage in this state. The coverage must be listed under item 3A of the information page.

The contractor must maintain proof that subcontractors doing work covered under this contract secured and maintained a workers' compensation policy for all employees working in New York State.

Every employer providing worker's compensation insurance and disability benefits must post notices of such coverage in the format prescribed by the Workers' Compensation Board in a conspicuous place on the jobsite.

# **Unemployment Insurance**

Employers liable for contributions under the Unemployment Insurance Law must conspicuously post on the jobsite notices furnished by the New York State Department of Labor.

Roberta Reardon, Commissioner



Kathy Hochul, Governor

Design & construction

Angela Lewis, Administrative Assistant Contract Management 35th Fl. Corning Tower Empire State Plaza Albany NY 12242 Schedule Year Date Requested PRC#

2023 through 2024 12/26/2023 2023014800

LocationCook Chill Production CenterProject ID#47430Project TypeReplace Building Chillers, Building 144

# Notice of Contract Award

New York State Labor Law, Article 8, Section 220.3a requires that certain information regarding the awarding of public work contracts, be furnished to the Commissioner of Labor. One "Notice of Contract Award" (PW 16, which may be photocopied), **MUST** be completed for **EACH** prime contractor on the above referenced project.

Upon notifying the successful bidder(s) of this contract, enter the required information and mail **OR** fax this form to the office shown at the bottom of this notice, **OR** fill out the electronic version via the NYSDOL website.

Federal Employer Identification Number:						
Name:Address:			_			
City: Amount of Contract: Approximate Starting Date: Approximate Completion Date:	ss	State:       Zip:         Contract Type:         [] (01) General Construction         [] (02) Heating/Ventilation         [] (03) Electrical         [] (04) Plumbing         [] (05) Other :				

# **Contractor Information** All information must be supplied

Phone: (518) 457-5589 Fax: (518) 485-1870 W. Averell Harriman State Office Campus, Bldg. 12, Room 130, Albany, NY 12226

# Social Security Numbers on Certified Payrolls:

The Department of Labor is cognizant of the concerns of the potential for misuse or inadvertent disclosure of social security numbers. Identity theft is a growing problem and we are sympathetic to contractors' concern regarding inclusion of this information on payrolls if another identifier will suffice.

For these reasons, the substitution of the use of the last four digits of the social security number on certified payrolls submitted to contracting agencies on public work projects is now acceptable to the Department of Labor. This change does not affect the Department's ability to request and receive the entire social security number from employers during its public work/ prevailing wage investigations.

# Construction Industry Fair Play Act: Required Posting for Labor Law Article 25-B § 861-d

Construction industry employers must post the "Construction Industry Fair Play Act" notice in a prominent and accessible place on the job site. Failure to post the notice can result in penalties of up to \$1,500 for a first offense and up to \$5,000 for a second offense. The posting is included as part of this wage schedule. Additional copies may be obtained from the NYS DOL website, https://dol.ny.gov/public-work-and-prevailing-wage

If you have any questions concerning the Fair Play Act, please call the State Labor Department toll-free at 1-866-435-1499 or email us at: <u>dol.misclassified@labor.ny.gov</u>.

# Worker Notification: (Labor Law §220, paragraph a of subdivision 3-a)

# Effective June 23, 2020

This provision is an addition to the existing wage rate law, Labor Law §220, paragraph a of subdivision 3-a. It requires contractors and subcontractors to provide written notice to all laborers, workers or mechanics of the *prevailing wage and supplement rate* for their particular job classification *on each pay stub*\*. It also requires contractors and subcontractors to *post a notice* at the beginning of the performance of every public work contract *on each job site* that includes the telephone number and address for the Department of Labor and a statement informing laborers, workers or mechanics of their right to contact the Department of Labor if he/she is not receiving the proper prevailing rate of wages and/or supplements for his/her job classification. The required notification will be provided with each wage schedule, may be downloaded from our website *www.labor.ny.gov* or be made available upon request by contacting the Bureau of Public Work at 518-457-5589. \*In the event the required information will suffice.

(12.20)

# To all State Departments, Agency Heads and Public Benefit Corporations IMPORTANT NOTICE REGARDING PUBLIC WORK ENFORCEMENT FUND

# **Budget Policy & Reporting Manual**

# **B-610**

# **Public Work Enforcement Fund**

effective date December 7, 2005

# 1. Purpose and Scope:

This Item describes the Public Work Enforcement Fund (the Fund, PWEF) and its relevance to State agencies and public benefit corporations engaged in construction or reconstruction contracts, maintenance and repair, and announces the recently-enacted increase to the percentage of the dollar value of such contracts that must be deposited into the Fund. This item also describes the roles of the following entities with respect to the Fund:

- New York State Department of Labor (DOL),
- The Office of the State of Comptroller (OSC), and
- State agencies and public benefit corporations.

# 2. Background and Statutory References:

DOL uses the Fund to enforce the State's Labor Law as it relates to contracts for construction or reconstruction, maintenance and repair, as defined in subdivision two of Section 220 of the Labor Law. State agencies and public benefit corporations participating in such contracts are required to make payments to the Fund.

Chapter 511 of the Laws of 1995 (as amended by Chapter 513 of the Laws of 1997, Chapter 655 of the Laws of 1999, Chapter 376 of the Laws of 2003 and Chapter 407 of the Laws of 2005) established the Fund.

# 3. Procedures and Agency Responsibilities:

The Fund is supported by transfers and deposits based on the value of contracts for construction and reconstruction, maintenance and repair, as defined in subdivision two of Section 220 of the Labor Law, into which all State agencies and public benefit corporations enter.

Chapter 407 of the Laws of 2005 increased the amount required to be provided to this fund to .10 of one-percent of the total cost of each such contract, to be calculated at the time agencies or public benefit corporations enter into a new contract or if a contract is amended. The provisions of this bill became effective August 2, 2005.

# To all State Departments, Agency Heads and Public Benefit Corporations IMPORTANT NOTICE REGARDING PUBLIC WORK ENFORCEMENT FUND

OSC will report to DOL on all construction-related ("D") contracts approved during the month, including contract amendments, and then DOL will bill agencies the appropriate assessment monthly. An agency may then make a determination if any of the billed contracts are exempt and so note on the bill submitted back to DOL. For any instance where an agency is unsure if a contract is or is not exempt, they can call the Bureau of Public Work at the number noted below for a determination. Payment by check or journal voucher is due to DOL within thirty days from the date of the billing. DOL will verify the amounts and forward them to OSC for processing.

For those contracts which are not approved or administered by the Comptroller, monthly reports and payments for deposit into the Public Work Enforcement Fund must be provided to the Administrative Finance Bureau at the DOL within 30 days of the end of each month or on a payment schedule mutually agreed upon with DOL.

Reports should contain the following information:

- Name and billing address of State agency or public benefit corporation;
- State agency or public benefit corporation contact and phone number;
- Name and address of contractor receiving the award;
- Contract number and effective dates;
- Contract amount and PWEF assessment charge (if contract amount has been amended, reflect increase or decrease to original contract and the adjustment in the PWEF charge); and
- Brief description of the work to be performed under each contract.

Checks and Journal Vouchers, payable to the "New York State Department of Labor" should be sent to:

Department of Labor Administrative Finance Bureau-PWEF Unit Building 12, Room 464 State Office Campus Albany, NY 12226

Any questions regarding billing should be directed to NYSDOL's Administrative Finance Bureau-PWEF Unit at (518) 457-3624 and any questions regarding Public Work Contracts should be directed to the Bureau of Public Work at (518) 457-5589.



Required Notice under Article 25-B of the Labor Law

# Attention All Employees, Contractors and Subcontractors: You are Covered by the Construction Industry Fair Play Act

# The law says that you are an employee unless:

- You are free from direction and control in performing your job, and
- You perform work that is not part of the usual work done by the business that hired you, and
- You have an independently established business.

Your employer cannot consider you to be an independent contractor unless all three of these facts apply to your work.

# It is against the law for an employer to misclassify employees as independent contractors or pay employees off the books.

**Employee Rights:** If you are an employee, you are entitled to state and federal worker protections. These include:

- Unemployment Insurance benefits, if you are unemployed through no fault of your own, able to work, and otherwise qualified,
- Workers' compensation benefits for on-the-job injuries,
- Payment for wages earned, minimum wage, and overtime (under certain conditions),
- Prevailing wages on public work projects,
- The provisions of the National Labor Relations Act, and
- A safe work environment.

It is a violation of this law for employers to retaliate against anyone who asserts their rights under the law. Retaliation subjects an employer to civil penalties, a private lawsuit or both.

# Independent Contractors: If you are an independent contractor, you must pay all taxes and Unemployment Insurance contributions required by New York State and Federal Law.

**Penalties** for paying workers off the books or improperly treating employees as independent contractors:

Civil Penalty	First offense: Up to \$2,500 per employee
	Subsequent offense(s): Up to \$5,000 per employee
Criminal Penalty	First offense: Misdemeanor - up to 30 days in jail, up to a \$25,000 fine and debarment from performing public work for up to one year.
	Subsequent offense(s): Misdemeanor - up to 60 days in jail or up to a \$50,000 fine and debarment from performing public work for up to 5 years.

If you have questions about your employment status or believe that your employer may have violated your rights and you want to file a complaint, call the Department of Labor at (866) 435-1499 or send an email to <u>dol.misclassified@labor.ny.gov</u>. All complaints of fraud and violations are taken seriously. You can remain anonymous.

Employer Name: IA 999 (09/16)

WE ARE YOUR DOL



New York State Department of Labor Bureau of Public Work

# **Attention Employees**

THIS IS A:

# PUBLIC WORK PROJECT

If you are employed on this project as a **worker**, **laborer**, **or mechanic** you are entitled to receive the **prevailing wage and supplements rate** for the classification at which you are working.

Your pay stub and wage notice received upon hire must clearly state your wage rate and supplement rate.

Chapter 629 of the Labor Laws of 2007: These wages are set by law and must be posted at the work site. They can also be found at: https://dol.ny.gov/bureau-public-work



If you feel that you have not received proper wages or benefits, please call our nearest office.\*

Albany(518) 457-2744Binghamton(607) 721-8005Buffalo(716) 847-7159Garden City(516) 228-3915New York City(212) 932-2419Newburgh(845) 568-5287

Patchogue Rochester Syracuse Utica White Plains (631) 687-4882 (585) 258-4505 (315) 428-4056 (315) 793-2314 (914) 997-9507

\* For New York City government agency construction projects, please contact the Office of the NYC Comptroller at (212) 669-4443, or <u>www.comptroller.nyc.gov</u> – click on Bureau of Labor Law.

Contractor Name:

Project Location:

# **Requirements for OSHA 10 Compliance**

Article 8 §220-h requires that when the advertised specifications, for every contract for public work, is \$250,000.00 or more the contract must contain a provision requiring that every worker employed in the performance of a public work contract shall be certified as having completed an OSHA 10 safety training course. The clear intent of this provision is to require that all employees of public work contractors, required to be paid prevailing rates, receive such training "prior to the performing any work on the project."

### The Bureau will enforce the statute as follows:

All contractors and sub contractors must attach a copy of proof of completion of the OSHA 10 course to the first certified payroll submitted to the contracting agency and on each succeeding payroll where any new or additional employee is first listed.

Proof of completion may include but is not limited to:

- Copies of bona fide course completion card (Note: Completion cards do not have an expiration date.)
- Training roster, attendance record of other documentation from the certified trainer pending the issuance of the card.
- Other valid proof

\*\*A certification by the employer attesting that all employees have completed such a course is not sufficient proof that the course has been completed.

Any questions regarding this statute may be directed to the New York State Department of Labor, Bureau of Public Work at 518-457-5589.

### WICKS

Public work projects are subject to the Wicks Law requiring separate specifications and bidding for the plumbing, heating and electrical work, when the total project's threshold is \$3 million in Bronx, Kings, New York, Queens and, Richmond counties; \$1.5 million in Nassau, Suffolk and Westchester counties; and \$500,000 in all other counties.

For projects below the monetary threshold, bidders must submit a sealed list naming each subcontractor for the plumbing, HVAC and electrical and the amount to be paid to each. The list may not be changed unless the public owner finds a legitimate construction need, including a change in specifications or costs or the use of a Project Labor Agreement (PLA), and must be open to public inspection.

Allows the state and local agencies and authorities to waive the Wicks Law and use a PLA if it will provide the best work at the lowest possible price. If a PLA is used, all contractors shall participate in apprentice training programs in the trades of work it employs that have been approved by the Department of Labor (DOL) for not less than three years. They shall also have at least one graduate in the last three years and use affirmative efforts to retain minority apprentices. PLA's would be exempt from Wicks, but deemed to be public work subject to prevailing wage enforcement.

The Commissioner of Labor shall have the power to enforce separate specification requirement s on projects, and may issue stopbid orders against public owners for non-compliance.

Other new monetary thresholds, and similar sealed bidding for non-Wicks projects, would apply to certain public authorities including municipal housing authorities, NYC Construction Fund, Yonkers Educational Construction Fund, NYC Municipal Water Finance Authority, Buffalo Municipal Water Finance Authority, Westchester County Health Care Association, Nassau County Health Care Corp., Clifton-Fine Health Care Corp., Erie County Medical Center Corp., NYC Solid Waste Management Facilities, and the Dormitory Authority.

Contractors must pay subcontractors within a 7 days period.

(07.19)

# Introduction to the Prevailing Rate Schedule

### Information About Prevailing Rate Schedule

This information is provided to assist you in the interpretation of particular requirements for each classification of worker contained in the attached Schedule of Prevailing Rates.

### Classification

It is the duty of the Commissioner of Labor to make the proper classification of workers taking into account whether the work is heavy and highway, building, sewer and water, tunnel work, or residential, and to make a determination of wages and supplements to be paid or provided. It is the responsibility of the public work contractor to use the proper rate. If there is a question on the proper classification to be used, please call the district office located nearest the project. District office locations and phone numbers are listed below.

Prevailing Wage Schedules are issued separately for "General Construction Projects" and "Residential Construction Projects" on a countyby-county basis.

General Construction Rates apply to projects such as: Buildings, Heavy & Highway, and Tunnel and Water & Sewer rates.

Residential Construction Rates generally apply to construction, reconstruction, repair, alteration, or demolition of one family, two family, row housing, or rental type units intended for residential use.

Some rates listed in the Residential Construction Rate Schedule have a very limited applicability listed along with the rate. Rates for occupations or locations not shown on the residential schedule must be obtained from the General Construction Rate Schedule. Please contact the local Bureau of Public Work office before using Residential Rate Schedules, to ensure that the project meets the required criteria.

### Payrolls and Payroll Records

Contractors and subcontractors are required to establish, maintain, and preserve for not less that six (6) years, contemporaneous, true, and accurate payroll records.

Every contractor and subcontractor shall submit to the Department of Jurisdiction (Contracting Agency), within thirty (30) days after issuance of its first payroll and every thirty (30) days thereafter, a transcript of the original payrolls, subscribed and affirmed as true under penalty of perjury.

### **Paid Holidays**

Paid Holidays are days for which an eligible employee receives a regular day's pay, but is not required to perform work. If an employee works on a day listed as a paid holiday, this remuneration is in addition to payment of the required prevailing rate for the work actually performed.

### Overtime

At a minimum, all work performed on a public work project in excess of eight hours in any one day or more than five days in any workweek is overtime. However, the specific overtime requirements for each trade or occupation on a public work project may differ. Specific overtime requirements for each trade or occupation are contained in the prevailing rate schedules.

Overtime holiday pay is the premium pay that is required for work performed on specified holidays. It is only required where the employee actually performs work on such holidays.

The applicable holidays are listed under HOLIDAYS: OVERTIME. The required rate of pay for these covered holidays can be found in the OVERTIME PAY section listings for each classification.

### **Supplemental Benefits**

Particular attention should be given to the supplemental benefit requirements. Although in most cases the payment or provision of supplements is straight time for all hours worked, some classifications require the payment or provision of supplements, or a portion of the supplements, to be paid or provided at a premium rate for premium hours worked. Supplements may also be required to be paid or provided on paid holidays, regardless of whether the day is worked. The Overtime Codes and Notes listed on the particular wage classification will indicate these conditions as required.

### Effective Dates

When you review the schedule for a particular occupation, your attention should be directed to the dates above the column of rates. These are the dates for which a given set of rates is effective. The rate listed is valid until the next effective rate change or until the new annual determination which takes effect on July 1 of each year. All contractors and subcontractors are required to pay the current prevailing rates of wages and supplements. If you have any questions please contact the Bureau of Public Work or visit the New York State Department of Labor website (www.labor.ny.gov) for current wage rate information.

### Apprentice Training Ratios

The following are the allowable ratios of registered Apprentices to Journey-workers.

For example, the ratio 1:1,1:3 indicates the allowable initial ratio is one Apprentice to one Journeyworker. The Journeyworker must be in place on the project before an Apprentice is allowed. Then three additional Journeyworkers are needed before a second Apprentice is allowed. The last ratio repeats indefinitely. Therefore, three more Journeyworkers must be present before a third Apprentice can be hired, and so on.

Please call Apprentice Training Central Office at (518) 457-6820 if you have any questions.

Title (Trade)	Ratio
Boilermaker (Construction)	1:1,1:4
Boilermaker (Shop)	1:1,1:3
Carpenter (Bldg.,H&H, Pile Driver/Dockbuilder)	1:1,1:4
Carpenter (Residential)	1:1,1:3
Electrical (Outside) Lineman	1:1,1:2
Electrician (Inside)	1:1,1:3
Elevator/Escalator Construction & Modernizer	1:1,1:2
Glazier	1:1,1:3
Insulation & Asbestos Worker	1:1,1:3
Iron Worker	1:1,1:4
Laborer	1:1,1:3
Mason	1:1,1:4
Millwright	1:1,1:4
Op Engineer	1:1,1:5
Painter	1:1,1:3
Plumber & Steamfitter	1:1,1:3
Roofer	1:1,1:2
Sheet Metal Worker	1:1,1:3
Sprinkler Fitter	1:1,1:2

If you have any questions concerning the attached schedule or would like additional information, please contact the nearest BUREAU of PUBLIC WORK District Office or write to:

New York State Department of Labor Bureau of Public Work State Office Campus, Bldg. 12 Albany, NY 12226

District Office Locations:	Telephone #	FAX #
Bureau of Public Work - Albany	518-457-2744	518-485-0240
Bureau of Public Work - Binghamton	607-721-8005	607-721-8004
Bureau of Public Work - Buffalo	716-847-7159	716-847-7650
Bureau of Public Work - Garden City	516-228-3915	516-794-3518
Bureau of Public Work - Newburgh	845-568-5287	845-568-5332
Bureau of Public Work - New York City	212-932-2419	212-775-3579
Bureau of Public Work - Patchogue	631-687-4882	631-687-4902
Bureau of Public Work - Rochester	585-258-4505	585-258-4708
Bureau of Public Work - Syracuse	315-428-4056	315-428-4671
Bureau of Public Work - Utica	315-793-2314	315-793-2514
Bureau of Public Work - White Plains	914-997-9507	914-997-9523
Bureau of Public Work - Central Office	518-457-5589	518-485-1870

## **Rockland County General Construction**

### Boilermaker

### JOB DESCRIPTION Boilermaker

### **ENTIRE COUNTIES**

Bronx, Dutchess, Kings, Nassau, New York, Orange, Putnam, Queens, Richmond, Rockland, Suffolk, Sullivan, Ulster, Westchester MAGES

Per Hour:	07/01/2023	01/01/2024
Boilermaker	\$ 65.88	\$ 67.38
Repairs & Renovations	65.88	67.38

Repairs & Renovation: Includes Repairing, Renovating replacement of parts to an existing unit(s).

### SUPPLEMENTAL BENEFITS

Per Hour:

Boilermaker	33.5% of hourly	33.5% of Hourly
Repair \$ Renovations	Wage Paid	Wage Paid
	+ \$ 26.49	+ \$26.85

NOTE: "Hourly Wage Paid" shall include any and all premium(s) pay.

Repairs & Renovation Includes replacement of parts and repairs & renovation of existing unit.

### **OVERTIME PAY**

See (\*B, O, \*\*U) on OVERTIME PAGE Note:\* Includes 9th & 10th hours, double for 11th or more. \*\* Labor Day ONLY, if worked.

Repairs & Renovation see (B,E,Q) on OT Page

### HOLIDAY

Paid:	See (1) on HOLIDAY PAGE
Overtime:	See (5, 6, 11, 12, 15, 25, 26, 29) on HOLIDAY PAGE

## **REGISTERED APPRENTICES**

Wage per hour:

(1/2) Year Terms at the following percentage of Boilermaker's Wage

1st	2nd	3rd	4th	5th	6th	7th
65%	70%	75%	80%	85%	90%	95%

Supplemental Benefits Per Hour:

Apprentice(s)	33.5% of Hourly Wage Paid Plus Amount Below	33.5% of Hourly Wage Paid Plus Amount Below
1st Term 2nd Term 3rd Term 4th Term 5th Term	\$ 20.12 21.03 21.95 22.83 23.76	\$ 20.36 21.28 22.22 23.12 24.07 25.00
6th Term 7th Term	24.67 25.58	25.00 25.93

NOTE: "Hourly Wage Paid" shall include any and all premium(s)

### Carpenter

# JOB DESCRIPTION Carpenter

**ENTIRE COUNTIES** 

Bronx, Kings, Nassau, New York, Putnam, Queens, Richmond, Rockland, Suffolk, Westchester

# WAGES

Per hour:

12/01/2023

# **DISTRICT** 4

4-5

### **DISTRICT** 8

Piledriver	\$ 59.16 + 9.79*
Dockbuilder	\$ 59.16 + 9.79*

### \*This portion is not subject to overtime premiums

### SUPPLEMENTAL BENEFITS

Per hour:

Journeyworker \$ 45.34

### **OVERTIME PAY**

See (B, E2, O) on OVERTIME PAGE

### HOLIDAY Paid:

See (1) on HOLIDAY PAGE.

Paid: f	or 1st &	2nd	yr.
Apprer	ntices		

See (5,6,11,13,25)

Overtime: See (5,6,11,13,25) on HOLIDAY PAGE.

### **REGISTERED APPRENTICES**

Wages per hour

(1)year terms:				
	1st	2nd	3rd	4th
	\$25.60	\$31.20	\$39.58	\$47.97
	+ 5.30*	+ 5.30*	+ 5.30*	+ 5.30*

\$ 31.83

\*This portion is not subject to overtime premiums

Supplemental benefits per hour:

All Terms:

8-1556 Db

12/01/2023

# Carpenter

### JOB DESCRIPTION Carpenter

### **ENTIRE COUNTIES**

Bronx, Kings, Nassau, New York, Queens, Richmond, Rockland, Suffolk, Westchester

### WAGES

07/01/2023 Per hour:

Carpet/Resilient Floor Coverer

\$ 55.05 + 8.25\*

\*This portion is not subject to overtime premiums

INCLUDES HANDLING & INSTALLATION OF ARTIFICIAL TURF AND SIMILAR TURF INDOORS/OUTDOORS.

### SUPPLEMENTAL BENEFITS

Per hour:

\$ 39.45

### **OVERTIME PAY** See (B, E, Q) on OVERTIME PAGE

### HOLIDAY

Paid: See (18, 19) on HOLIDAY PAGE.

Paid for 1st & 2nd yr.	
Apprentices	See (5,6,11,13,16,18,19,25)
Overtime:	See (5,6,11,13,16,18,19,25) on HOLIDAY PAGE.

# **REGISTERED APPRENTICES**

Wage per	hour - (1	) year terms:
----------	-----------	---------------

1st	2nd	3rd	4th
\$ 25.20	\$ 28.20	\$ 32.45	\$ 40.33

### **DISTRICT** 8

Prevailing Wage Rates for Last Published on Dec 01 2		)/2024			Published by the New York State Department of Labo PRC Number 2023014800 Rockland County
	+ 1.85*	+ 2.35*	+ 2.85*	+ 3.85*	
This portion is not subje	ct to overtime pre	emiums			
Supplemental benefits pe	er hour:				
	1st	2nd	3rd	4th	
	\$ 15.22	\$ 16.22	\$ 19.32	\$ 20.32	8-228
Carpenter					12/01/2023
JOB DESCRIPTION	Carpenter				DISTRICT 8
ENTIRE COUNTIES Bronx, Dutchess, Kings,	Nassau, New Yo	rk, Orange, Pı	utnam, Queens	s, Richmond, Ro	ckland, Suffolk, Westchester
WAGES					
Per Hour:	07/01/2023				
Marine Construction:					
Marine Diver	\$ 74.03				
	+ 9.79*				
Marine Tender	\$ 53.57 + 9.79*				
This portion is not subje SUPPLEMENTAL BEI <sup>P</sup> er Hour:	-	emiums			
Journeyworker	\$ 45.34				
<b>OVERTIME PAY</b> See (B, E, E2, Q) on OVI	ERTIME PAGE				
<b>HOLIDAY</b> Paid: Overtime:	See (18, 19) o See (5, 6, 10,	on HOLIDAY F 11, 13, 16, 18	PAGE 3, 19) on HOLI	DAY PAGE	
<b>REGISTERED APPRE</b> Wages per hour: One (1) year terms.	INTICES				
1st year	\$ 25.60				
2nd year	+ 5.30* 31.20				
3rd year	+ 5.30* 39.58				
4th year	+ 5.30* 47.97 + 5.05*				
*This portion is not subje	ct to overtime pre	emiums			
Supplemental Benefits Per Hour:					
All terms	\$ 31.83				8-1456MC
Carpenter					12/01/2023
	Dormonto-				
JOB DESCRIPTION C ENTIRE COUNTIES	Jarpenter				DISTRICT 8
Bronx, Kings, Nassau, No WAGES	ew York, Putnam	, Queens, Ric	hmond, Rockl	and, Suffolk, We	stchester

07/01/2023
------------

Per hour:

Building Millwright \$ 58.70 + 12.62\*

\*This portion is not subject to overtime premiums

#### SUPPLEMENTAL BENEFITS

Per hour:

Millwright

#### **OVERTIME PAY**

See (B, E, Q) on OVERTIME PAGE

HOLIDAY Paid:

See (18,19) on HOLIDAY PAGE.

\$ 44.31

Overtime

See (5,6,8,11,13,18,19,25) on HOLIDAY PAGE.

#### **REGISTERED APPRENTICES**

Wages per hour:

One (1) year terms:

1st.	2nd.	3rd.	4th.
\$31.74	\$37.19	\$42.64	\$53.54
+ 6.75*	+ 7.92*	+ 9.09*	+ 11.43*

\*This portion is not subject to overtime premiums

Supplemental benefits per hour:

One (1) year te	rms:			
	1st.	2nd.	3rd.	4th.
	\$29.81	\$32.34	\$35.52	\$39.94

Carpenter

#### JOB DESCRIPTION Carpenter

ENTIRE COUNTIES

Bronx, Kings, Nassau, New York, Queens, Richmond, Rockland, Westchester

# PARTIAL COUNTIES

Orange: South of but including the following, Waterloo Mills, Slate Hill, New Hampton, Goshen, Blooming Grove, Mountainville, east to the Hudson River.

Putnam: South of but including the following, Cold Spring, TompkinsCorner, Mahopac, Croton Falls, east to Connecticut border. Suffolk: West of Port Jefferson and Patchogue Road to Route 112 to the Atlantic Ocean.

WAGES Per hour:	07/01/2023
Core Drilling: Driller	\$ 43.88 + 2.50*
Driller Helper	\$ 34.47 + 2.50*

Note: Hazardous Waste Pay Differential:

For Level C, an additional 15% above wage rate per hour

For Level B, an additional 15% above wage rate per hour

For Level A, an additional 15% above wage rate per hour

Note: When required to work on water: an additional \$ 3.00 per hour.

\*This portion is not subject to overtime premiums

#### SUPPLEMENTAL BENEFITS

Per hour:

Driller and Helper \$ 28.85

OVERTIME PAY See (B, G, P) on OVERTIME PAGE **DISTRICT** 8

8-740.1

12/01/2023

\$ 1.25\*\*

See (5, 6) on HOLIDAY PAGE See (5, 6) on HOLIDAY PAGE

8-1536-CoreDriller

12/01/2023

# Carpenter - Building / Heavy&Highway DISTRICT 11 DISTRICT 11 ENTIRE COUNTIES Putnam, Rockland, Westchester WAGES WAGES VAGES:(per hour) Applies to CAPRENTER BUILDING/HEAVY & HIGHWAY/TUNNEL: 07/01/2023 07/01/2023 07/01/2024 07/01/2025 07/01/2023 07/01/2024 07/01/2025

+\$6.71\*

\*For all hours paid straight or premium.

\*\*To be allocated at a later date.

SHIFT DIFFERENTIAL: When it is mandated by a Government Agency irregular or off shift can be worked. The Carpenter shall receive an additional fifteen percent (15%) of wage plus applicable benefits.

\$ 1.25\*\*

\$ 1.25\*\*

#### SUPPLEMENTAL BENEFITS

Per hour:

Base Wage

Paid: Overtime:

Journeyworker \$ 33.22

#### OVERTIME PAY See (B, E, Q) on OVERTIME PAGE

#### HOLIDAY

 BUILDING:

 Paid:
 See (1) on HOLIDAY PAGE.

 Overtime:
 See (5, 6, 16, 25) on HOLIDAY PAGE.

 - Holidays that fall on Sunday will be observed Monday.

\$ 39.80

#### HEAVY&HIGHWAY/TUNNEL:

Paid:See ( 5, 6, 25 ) on HOLIDAY PAGEOvertime:See ( 5, 6 ) on HOLIDAY PAGE

- Holidays that fall on Sunday will be observed Monday

- Must be employed during the five (5) work days immediately preceding a holiday or during the five (5) work days following the paid holiday to receive holiday pay

- If Employee is entitled to a paid holiday, the Employee is paid the Holiday wage and supplemental benefits whether they work or not. If Employee works the Holiday, the Employee will receive holiday pay (including supplemental benefits), plus the applicable premium wage for working the Holiday. If Employee works in excess of 8 hours on Holiday, then benefits will be paid for any hours in excess of 8 hours.

#### **REGISTERED APPRENTICES**

1 year terms at the following wage rates:

1st \$ 19.90 +3.58* *For all hours	2nd \$ 23.88 +3.58* paid straight o	3rd \$ 25.87 +3.58* pr premium	4th \$ 27.86 +3.58*	5th \$ 31.84 +3.58*	
SUPPLEMENTAL BENEFITS per hour:					
All terms				\$ 16.27	
Electrician					

#### JOB DESCRIPTION Electrician

**ENTIRE COUNTIES** Orange, Putnam, Rockland

PARTIAL COUNTIES

Dutchess: Towns of Fishkill, East Fishkill, and Beacon.

# WAGES

Per hour:

DISTRICT 11

11-279.1B/HH 12/01/2023

	07/01/2023	04/01/2024
Electrician Wireman/Technician	\$ 49.50	\$ 50.50
	+9.00*	+ 9.50*

SHIFT DIFFERENTIAL: On Public Work in New York State when shift work is mandated either in the job specifications or by the contracting agency, the following rates apply when shift is worked:

Between 4:30pm & 12:30am	\$ 58.08	\$ 59.30
	+ 9.00*	+ 9.50*
Between 12:30am & 8:30am	\$ 65.06	\$66.35
	+ 9.00*	+ 9.50*

\*For all hours paid straight or premium, not to be included in 3% calculation for supplemental benefits.

NOTE ADDITIONAL AMOUNTS PAID FOR THE FOLLOWING WORK LISTED BELOW (subject to overtime premiums):

- On jobs where employees are required to work from boatswain chairs, swinging scaffolds, etc., forty (40) feet or more above the ground, or under compressed air, using Scottair packs, or gas masks, they shall receive an additional \$2.00 per hour above the regular straight time rate.

- Journeyman Wireman working in Shafts, Tunnels or on Barges: \$5.00 above the Journeyman Wireman rate of pay

- Journeyman Wireman when performing welding or cable splicing: \$3.00 above the Journeyman Wireman rate of pay

- Journeyman Wireman required to have a NYS Asbestos Certificate: \$3.00 above the Journeyman Wireman rate of pay

- Journeyman Wireman required to have a CDL: \$3.00 above the Journeyman Wireman rate of pay.

#### SUPPLEMENTAL BENEFITS

Per hour:	07/01/2023	04/01/2024
Journeyman	\$ 28.68 plus	\$ 29.68 plus
	3% of straight	3% of straight
	or premium wage	or premium wage

# **OVERTIME PAY**

See (B, E, Q) on OVERTIME PAGE

HOLIDAY Paid:

See (1) on HOLIDAY PAGE See (5, 6, 13, 15, 16, 25) on HOLIDAY PAGE

Overtime: When the holiday falls on a Saturday it is observed the Friday before. When the holiday falls on a Sunday it is observed on the Monday after.

#### **REGISTERED APPRENTICES**

WAGES:

(1)year terms at the following rates

07/01/2023	1st	2nd	3rd	4th	5th	6th
1st Shift	\$ 14.25	\$ 19.00	\$ 23.75	\$ 28.50	\$ 33.25	\$ 35.63
	+1.00*	+1.00*	+1.50*	+2.00*	+2.50*	+2.50*
2nd Shift	16.72	22.29	27.86	33.43	39.00	41.79
	+1.00*	+1.00*	+1.50*	+2.00*	+2.50*	+2.50*
3rd Shift	18.72	24.97	31.21	37.45	43.69	46.82
	+1.00*	+1.00*	+1.50*	+2.00*	+2.50*	+2.50*
	1.00	1.00	1.50	12.00	12.00	12.00
09/01/2023	1st	2nd	3rd	4th	5th	6th
1st Shift	\$ 15.68	\$ 19.00	\$ 23.75	\$ 28.50	\$ 33.25	\$ 35.63
	+1.00*	+1.00*	+1.50*	+2.00*	+2.50*	+2.50*
2nd Shift	18.39	22.29	27.86	33.43	39.00	41.79
	+1.00*	+1.00*	+1.50*	+2.00*	+2.50*	+2.50*
3rd Shift	20.60	24.97	31.21	47.45	43.69	46.82
	+1.00*	+1.00*	+1.50*	+2.00*	+2.50*	+2.50*
04/01/2024	1st	2nd	3rd	4th	5th	6th
1st Shift	\$ 16.01	\$ 19.40	\$ 24.25	\$ 29.10	\$ 33.95	\$ 36.38
	+1.00*	+1.00*	+1.50*	+2.00*	+2.50*	+2.50*
2nd Shift	18.78	22.76	28.45	34.13	39.82	42.67
	+1.00*	+1.00*	+1.50*	+2.00*	+2.50*	+2.50*
3rd Shift	21.04	25.49	31.86	38.24	44.61	47.80
	+1.00*	+1.00*	+1.50*	+2.00*	+2.50*	+2.50*
09/01/2024	1st	2nd	3rd	4th	5th	6th
1st Shift	\$ 16.01	\$ 19.40	\$ 24.25	\$ 29.10	\$ 33.95	\$ 36.38
	+1.00*	+1.00*	+1.00*	+2.00*	+2.50*	+2.50*
2nd Shift	18.78	22.76	28.45	34.13	39.82	42.67
	+1.00*	+1.00*	+1.00*	+2.00*	+2.50*	+2.50*

3rd Shift	21.04 +1.00*	25.49 +1.00*	31.86 +1.00*	38.24 +2.00*	44.61 +2.50*	47.80 +2.50*
04/01/2025	1st	2nd	3rd	4th	5th	6th
1st Shift	\$ 16.34	\$ 19.80	\$ 24.75	\$ 29.70	\$ 34.65	\$ 37.13
2nd Shift	+1.00* 19.17	+1.00* 23.23	+1.00* 29.03	+2.00* 34.84	+2.50* 40.64	+2.50* 43.55
	+1.00*	+1.00*	+1.00*	+2.00*	+2.50*	+2.50*
3rd Shift	21.47 +1.00*	26.02 +1.00*	32.52 +1.00*	39.03 +2.00*	45.53 +2.50*	48.79 +2.50*

\*For all hours paid straight or premium, not to be included in 3% calculation for supplemental benefits.

#### SUPPLEMENTAL BENEFITS per hour:

07/01/2023 1st term 2nd term 3rd term 4th term 5th term 6th term	<ul> <li>\$ 16.28 plus 3% of straight or premium wage</li> <li>\$ 16.28 plus 3% of straight or premium wage</li> <li>\$ 18.28 plus 3% of straight or premium wage</li> <li>\$ 18.78 plus 3% of straight or premium wage</li> <li>\$ 20.28 plus 3% of straight or premium wage</li> <li>\$ 20.28 plus 3% of straight or premium wage</li> </ul>
09/01/2024 1st term 2nd term 3rd term 4th term 5th term 6th term	<ul> <li>\$ 16.28 plus 3% of straight or premium wage</li> <li>\$ 17.78 plus 3% of straight or premium wage</li> <li>\$ 18.78 plus 3% of straight or premium wage</li> <li>\$ 19.78 plus 3% of straight or premium wage</li> <li>\$ 21.28 plus 3% of straight or premium wage</li> <li>\$ 21.28 plus 3% of straight or premium wage</li> </ul>

**Elevator Constructor** 

12/01/2023

11-363/1

JOB DESCRIPTION Elevator Constructor

**DISTRICT** 4

#### ENTIRE COUNTIES

Bronx, Kings, Nassau, New York, Queens, Richmond, Suffolk

#### PARTIAL COUNTIES

Rockland: Entire County except for the Township of Stony Point

Westchester: Entire County except for the Townships of Bedford, Lewisboro, Cortland, Mt. Kisco, North Salem, Pound Ridge, Somers and Yorktown.

#### WAGES

Per hour:	07/01/2023
Elevator Constructor	\$ 77.49
Modernization & Service/Repair	\$ 60.89

NOTE - The 'Employer Registration' (30.1) use of a '4 Day/10 Hour Work schedules' will no longer be accepted or processed. All registered projects prior to June 30,2023 will expire within the granted time frame.

For Pre-Registered Projects Four (4), Ten (10) hour days may be worked at straight time during a week, Monday thru Thursday. Friday may be used as a make-up day. Tuesday thru Friday may be worked with no make-up day. For further clarification contact your local Bureau Office.

# SUPPLEMENTAL BENEFITS

Per Hour:

Modernization & Service/Repairs	44.412
Elevator Constructor	\$ 45.574

#### OVERTIME PAY

Constructor See ( D, M, T ) on OVERTIME PAGE.

Modern/Service See ( B, F, S ) on OVERTIME PAGE.

#### HOLIDAY

 Paid:
 See (5, 6, 8, 11, 15, 16, 25) on HOLIDAY PAGE

 Overtime:
 See (5, 6, 8, 11, 15, 16, 25) on HOLIDAY PAGE

#### **REGISTERED APPRENTICES**

WAGES PER HOUR:

\*Note:1st, 2nd, 3rd Terms are based on Average wage of Constructor & Modernization. Terms 4 thru 9 Based on Journeyman's wage of classification Working in.

#### 6 MONTH TERMS:

1st Term* 50%	2nd & 3rd Term* 50%	4th & 5th Term 55%	6th & 7th Term 65%	8th & 9th Term 75%
SUPPLEMENTAL BENEF Elevator Constructor 1st Term 2nd & 3rd Term 4th & 5th Term 6th & 7th Term 8th & 9th Term	TTS \$ 0.00 36.024 36.943 38.448 39.953			
Modernization & Service/Repair 1st Term 2nd & 3rd Term 4th & 5th Term 6th & 7th Term 8th & 9th Term	\$ 0.00 35.694 36.525 37.948 39.38			

#### Elevator Constructor

#### JOB DESCRIPTION Elevator Constructor

#### **ENTIRE COUNTIES**

Columbia, Dutchess, Greene, Orange, Putnam, Sullivan, Ulster

#### PARTIAL COUNTIES

Delaware: Towns of Andes, Bovina, Colchester, Davenport, Delhi, Harpersfield, Hemdon, Kortright, Meredith, Middletown, Roxbury, Hancock & Stamford

Rockland: Only the Township of Stony Point.

Westchester: Ónly the Townships of Bedford, Lewisboro, Cortland, Mt. Kisco, North Salem, Pound Ridge, Somers and Yorktown.

Per Hour	07/01/2023	01/01/2024
Mechanic	\$ 67.35	\$ 70.15
Helper	70% of Mechanic Wage Rate	70% of Mechanic Wage Rate

NOTE - The "Employer Registration" (30.1) use of a '4 Day/10 Hour Work schedules' will no longer be accepted or processed. All registered projects prior to June 30, 2023 will expire within the granted time frame.

For Pre-Registered Projects Four (4), Ten (10) hour days may be worked at straight time during a week, Monday thru Thursday. Friday may be used as a make-up day. Tuesday thru Friday may be worked with no make-up day. For further clarification contact your local Bureau Office.

#### SUPPLEMENTAL BENEFITS

Per	hour
-----	------

	07/01/2023	01/01/2024
Journeyperson/Helper	\$ 37.335*	\$ 37.885*

(\*)Plus 6% of regular hourly if less than 5 years of service. Plus 8% of regular hourly rate if more than 5 years of service.

( )	terror at the terror attended
OVERTIME PAY	
See (D, O) on OVERTIM	E PAGE
HOLIDAY	
Paid:	See (5

See (5, 6, 15, 16) on HOLIDAY PAGE

12/01/2023

**DISTRICT** 1

4-1

**DISTRICT** 8

1-138

Overtime: See (5, 6, 15, 16) on HOLIDAY PAGE Note: When a paid holiday falls on Saturday, it shall be observed on Friday. When a paid holiday falls on Sunday, it shall be observed on Monday.

#### **REGISTERED APPRENTICES**

Wages per h	our:			
0-6 mo*	6-12 mo	2nd yr	3rd yr	4th yr
50 %	55 %	65 %	70 %	80 %

(\*)Plus 6% of the hourly rate, no additional supplemental benefits.

Supplemental Benefits per hour worked:

Same as Journeyperson/Helper

Glazier	12/01/2023

#### JOB DESCRIPTION Glazier

#### **ENTIRE COUNTIES**

Bronx, Dutchess, Kings, Nassau, New York, Orange, Putnam, Queens, Richmond, Rockland, Suffolk, Sullivan, Ulster, Westchester WAGES

Per hour:	7/01/2023
Glazier & Glass Tinting \$ 61.64 *Scaffolding Window Film	65.64
**Repair & Maintenance	30.76

\*Scaffolding includes swing scaffold, mechanical equipment, scissor jacks, man lifts, booms & buckets 30' or more, but not pipe scaffolding.

\*\*Repair & Maintenance- All repair & maintenance work on a particular building whenever performed, where the total cumulative Repair & Maintenance contract value is under \$184,000.

#### SUPPLEMENTAL BENEFITS

Per hour:	7/01/2023
Glazier & Glass Tinting	\$ 40.20
Window Film Repair & Maintenance	23.19

#### **OVERTIME PAY**

See (B, E, Q, V) on OVERTIME PAGE For 'Repair & Maintenance' see (B, B2, I, S) on overtime page.

#### HOLIDAY

Paid:See (1) on HOLIDAY PAGEOvertime:See (4, 6, 16, 25) on HOLIDAY PAGEFor 'Repair & Maintenance'Paid: See(5, 6, 16, 25)Overtime:See(5, 6, 16, 25)

#### **REGISTERED APPRENTICES**

Wage per hour:

(1) year terms at the following wage rates:	
	7/01/2023

1st term 2nd term 3rd term 4th term	\$ 21.93 30.05 39.95 48.97
Supplemental Benefits:	
(Per hour)	
1st term	\$ 18.25
2nd term	25.97
3rd term	31.27

8-1087 (DC9 NYC)

Insulator -	Heat &	Frost
-------------	--------	-------

4th term

# 12/01/2023

JOB DESCRIPTION Insulator - Heat & Frost ENTIRE COUNTIES Dutchess, Orange, Putnam, Rockland, Westchester		DISTRICT 8
WAGES Per hour:	07/01/2023	06/01/2024
Insulator	\$ 59.25	+ \$ 2.50
Discomfort & Additional Training**	62.31	+ \$ 2.50
Fire Stop Work*	31.77	+ \$ 2.50

\* Applies on all exclusive Fire Stop Work (When contract is for Fire Stop work only). No apprentices on these contracts only.

\*\*Applies to work requiring; garb or equipment worn against the body not customarily worn by insulators; psychological evaluation ;special training, including but not limited to "Yellow Badge" radiation training

Note: Additional \$0.50 per hour for work 30 feet or more above floor or ground level.

34.32

# SUPPLEMENTAL BENEFITS

Per hour:

Journeyworker	\$ 37.35
Discomfort & Additional Training Fire Stop Work: Journeyworker	39.39 19.03

# OVERTIME PAY

See (B, E, E2, Q, \*T) on OVERTIME PAGE

#### HOLIDAY Paid:

See (1) on HOLIDAY PAGE

Note: Last working day preceding Christmas and New Years day, workers shall work no later than 12:00 noon and shall receive 8 hrs pay.

Overtime: See (2\*, 4, 6, 16, 25) on HOLIDAY PAGE. \*Note: Labor Day triple time if worked.

# REGISTERED APPRENTICES

(1) year terms:

Insulator Appi 1st \$ 31.77	rentices: 2nd \$ 37.26	3rd \$ 42.76	4th \$ 48.26	
Discomfort & Additional Training Apprentices:				
1st	2nd	3rd	4th	
\$ 33.30	\$ 39.09	\$ 44.90	\$ 50.71	
Supplemental Benefits paid per hour:				

Insulator Apprentices:	
1st term	\$ 19.03
2nd term	22.69
3rd term	26.36
4th term	30.03

Discomfort & Additional Training Apprentice	s:
1st term	\$ 20.06
2nd term	23.92
3rd term	27.78
4th term	31.66

JOB DESCRIPTION Ironworker

Ironworker

**ENTIRE COUNTIES** 

**DISTRICT** 4

#### 8-91

12/01/2023

#### Bronx, Kings, Nassau, New York, Queens, Richmond, Suffolk, Westchester PARTIAL COUNTIES Rockland: Southern section - south of Convent Road and east of Blue Hills Road. WAGES 07/01/2023 Per hour: Reinforcing & Metal Lathing \$ 56.95 "Base" Wage \$ 55.20 plus \$ 1.75 "Base" Wage is used to calculate overtime hours only. SUPPLEMENTAL BENEFITS Per hour: Reinforcing & \$ 42.72 Metal Lathing **OVERTIME PAY** See (B, E, Q, \*X) on OVERTIME PAGE \*Only \$23.50 per Hour for non worked hours Supplemental Benefit Premiums for Overtime Hours worked: Time & One Half \$ 49.47 Double Time \$ 56.22 HOLIDAY See (1) on HOLIDAY PAGE Paid: See (5, 6, 11, 13, \*18, \*\*19, 25) on HOLIDAY PAGE Overtime: \*Note: Work performed after first 4 Hours. **REGISTERED APPRENTICES** (1) year terms at the following wage rates: 1st term 2nd term 3rd term 4th Term Wage Per Hour: \$ 22.55 \$ 34.68 \$ 37.18 \$ 28.38 "Base" Wage \$ 26.80 \$ 35.60 \$21.00 \$ 33.10 plus \$1.55 plus \$1.58 plus \$1.58 plus \$1.58 "Base" Wage is used to calculate overtime hours ONLY. SUPPLEMENTAL BENIFITS Per Hour: 4th Term 1st term 2nd term 3rd term \$18.17 \$21.34 \$ 22.00 \$ 22.50

#### Ironworker

#### JOB DESCRIPTION Ironworker

**ENTIRE COUNTIES** 

Dutchess, Orange, Putnam, Rockland, Sullivan, Ulster

# WAGES

Per hour:

07/01/2023

07/01/2024 Additional

07/01/2025 Additional

4-46Reinf

#### 12/01/2023

07/01/2026 Additional

#### **DISTRICT** 11

Page 30

Structural	\$ 52.63	\$ 2.00*	\$ 2.00*	\$2.00*
Reinforcing*	52.63	2.00*	2.00*	2.00*
Ornamental	52.63	2.00*	2.00*	2.00*
Chain Link Fence	52.63	2.00*	2.00*	2.00*

#### \* To be allocated at a later date.

NOTE: For Reinforcing classification ONLY, Ironworker 4-46Reinf rates apply in Rockland County's southern section (south of Convent Road and east of Blue Hills Road).

On Government Mandated Irregular Work Days or Shift Work, the following wage will be paid:

1st Shift	\$ 52.63
2nd Shift	67.34
3rd Shift	72.24
**Nista Any abift that wayles want	10,00 midnight shall up

\*\*Note- Any shift that works past 12:00 midnight shall receive the 3rd shift differential.

#### SUPPLEMENTAL BENEFITS

Per hour:

Journeyman \$43.47

OVERTIME PAY

See (B1, Q, V) on OVERTIME PAGE

#### HOLIDAY

 Paid:
 See (1) on HOLIDAY PAGE

 Overtime:
 See (5, 6, 16) on HOLIDAY PAGE

 If a holiday falls on Saturday, it will be observed Friday.
 If a holiday falls on Sunday, it will be observed Monday.

# REGISTERED APPRENTICES

#### Wages:

(1) year terms at the following wage:

	1st yr	2nd yr	3rd yr	4th yr
1st Shift	\$ 26.32	\$ 31.58	\$ 36.85	\$ 42.10
2nd Shift	36.16	42.40	48.64	54.86
3rd Shift	39.45	46.00	52.57	59.12

Supplemental Benefits per hour:

1st year	\$ 37.35
2nd year	38.57
3rd year	39.80
4th year	41.02

#### Laborer - Building

JOB DESCRIPTION Laborer - Building

#### **ENTIRE COUNTIES**

Rockland

#### WAGES

Class 1: Custodial and janitorial work, general cleanup, and flag person.

Class 2: Concrete laborer, mason tending, hod carrier, signal person, pressure blasting and washing, chainsaw, demo saw, jackhammers, general labor.

Class 3: Jumping jack, air track drills, grading, explosive handler and blaster, grade checker. When OSHA requires negative pressure respirator.

Class 4: Environmental work including but not limited to asbestos abatement, toxic and hazardous abatement, lead abatement work, mold remediation and biohazards.

WAGES: (per hour)	07/01/2023	06/01/2024	06/01/2025	06/01/2025
		Additional	Additional	Additional
Class 1	\$ 41.48	\$ 2.51*	\$ 2.60*	\$ 2.69*
Class 2	44.59	2.62*	2.71*	2.81*
Class 3	45.72	2.66*	2.75*	2.85*
Class 4	46.91	2.70*	2.80*	2.89*

11-417 **12/01/2023** 

#### DISTRICT 11

\*To be allocated at a later date.

SHIFT DIFFERENTIAL: On all Governmental mandated or irregular or off shift work, an additional 25% of the wage will be paid hourly.

NOTE: All work five feet or more outside the building foundation line shall be deemed Heavy & Highway

#### SUPPLEMENTAL BENEFITS

Per Hour:

Journeyman	\$ 29.50
Shift Differential	\$ 36.37

#### OVERTIME PAY

See (B, \*E, E5, \*\*Q) on OVERTIME PAGE

\*For first 8 hours on Saturday

\*\*When an employee is required to work on a holiday which falls on a Sunday the employee shall be paid three (3) times the hourly rate and one (1) hour benefits for every hour worked. When an employee is required to work on a holiday which falls on a Saturday the employee shall be paid two and a half (2.5) times the hourly rate and one hour benefits for every hour worked.

#### HOLIDAY

Paid:See (1) on HOLIDAY PAGE.Overtime:See (5, 6, 16, 25) on HOLIDAY PAGE.

#### **REGISTERED APPRENTICES**

(1000) hour terms at the following wages.

07/01/2023 06/01/2024
1st term \$ 27.05 \$ 28.05
2nd term 31.25 32.35
3rd term 35.40 36.70
4th term 39.55 41.00
Supplemental Benefits per hour:
All Terms Regular \$28.50 \$29.40
All Terms Shift Rate 35.12 TBD

#### Laborer - Heavy&Highway

**JOB DESCRIPTION** Laborer - Heavy&Highway

#### **ENTIRE COUNTIES**

Rockland

#### WAGES

CLASS 1: Flagperson, gateperson.

CLASS 2: General laborer, chuck tender, nipper, powder carrier, magazine tender, concrete men, vibrator men, mason tender, mortar men, traffic control, custodial work, temporary heat, pump men, pit men, dump men, asphalt men, joint setter, signalman, pipe men, riprap, dry stone layers, jack hammer, bush hammer, pavement breaker, men on mulching & seeding machines, all seeding & sod laying, landscape work, walk behind self-propelled power saws, grinder, walk behind rollers and tampers of all types, burner men, filling and wiring of baskets for gabion walls, chain saw operator, railroad track laborers, power buggy, power brush cutter, retention liners, walk behind surface planer, chipping hammer, manhole, catch basin or inlet installing, mortar mixer, laser men. \*Micropaving and crack sealing.

CLASS 3: Asbestos, toxic, bio-remediation and phyto-remediation, lead or hazardous materials abatement when certification or license is required, Drilling Equipment Only Where a Separate Air Compressor Unit Supplies Power.

CLASS 4: Asphalt screedman, blaster, all laborers involved in pipejacking and boring operations not exceeding more than 10 feet into pipe, boring or drilled area.

WAGES: (per hour)	07/01/2023	06/01/2024
		Additional
Class 1	\$ 43.75	\$ 2.25**
Class 2	47.35	2.35**
Class 3	51.65	2.45**
Class 4	55.05	4.10**

\* When laborers are performing micro paving, crack sealing or slurry application when not part of asphalt prep operations laborers shall receive an additional \$2.50 per hour over rate.

\*\* To be allocated at a later date.

DISTRICT 11

11-754B

12/01/2023

SHIFT DIFFERENTIAL: Night work and irregular shift require 20% increase on wages for all Government mandated night and irregular shift work.

NOTE - The 'Employer Registration' (30.1) use of a '4 Day/10 Hour Work schedules' will no longer be accepted or processed. All registered projects prior to June 30,2023 will expire within the granted time frame.

For Pre-Registered Projects Four (4), Ten (10) hour days may be worked at straight time during a week, Monday thru Thursday. Friday may be used as a make-up day. Tuesday thru Friday may be worked with no make-up day. For further clarification contact your local Bureau Office.

#### SUPPLEMENTAL BENEFITS

\$ 29.38
34.87

#### **OVERTIME PAY**

See (B, E, P, \*R, \*\*S, \*\*\*T, X) on OVERTIME PAGE \*For Mon-Fri Holidays, Double Benefits to be paid for all hours worked. \*\*For Saturday Holidays, Two and one Half Benefits for all hours worked. \*\*\*For Sunday Holidays, Triple Benefits for all hours worked.

#### HOLIDAY

Paid:	See (5, 6, 15, 25) on HOLIDAY PAGE
Overtime:	See (5, 6, 15, 25) on HOLIDAY PAGE

To be eligible for a paid holiday, an employee must work at least two (2) days in the calendar week or payroll week in which the holiday falls. **REGISTERED APPRENTICES** 

(1000) hour terms at the following wages.

	07/01/2023	06/01/2024
1st term	\$ 27.05	\$ 28.05
2nd term	31.25	32.35
3rd term	35.40	36.70
4th term	39.55	41.00
Supplemental Benefits per hour:		
All Terms Regular	\$ 28.50	\$ 29.40
All Terms Shift Rate	33.79	TBD

#### Laborer - Tunnel

#### JOB DESCRIPTION Laborer - Tunnel

# **ENTIRE COUNTIES**

Columbia, Dutchess, Greene, Orange, Otsego, Putnam, Rockland, Sullivan, Ulster, Westchester

#### PARTIAL COUNTIES

Chenango: Townships of Columbus, Sherburne and New Berlin. Delaware: Townships of Andes, Bovina, Middletown, Roxbury, Franklin, Hamden, Stamford, Delhi, Kortright, Harpersfield, Merideth and Davenport.

#### WAGES

Class 1: All support laborers/sandhogs working above the shaft or tunnel.

Class 2: All laborers/sandhogs working in the shaft or tunnel.

Class 4: Safety Miners

Class 5: Site work related to Shaft/Tunnel

WAGES: (per hour)

	07/01/2023	06/01/2024	06/01/2025
Class 1	\$ 55.55	\$ 57.05	\$ 58.55
Class 2	57.70	59.20	60.70
Class 4	64.10	65.60	67.10
Class 5	47.65	49.90	51.40

Toxic and hazardous waste, lead abatement and asbestos abatement work will be paid an additional \$ 3.00 an hour.

SHIFT DIFFERENTIAL...On all Government mandated irregular shift work:

- Employee shall be paid at time and one half the regular rate Monday through Friday.

- Saturday shall be paid at 1.65 times the regular rate.

**DISTRICT** 11

12/01/2023

- Sunday shall be paid at 2.15 times the regular rate.

#### SUPPLEMENTAL BENEFITS

Per hour:

Benefit 1	\$ 35.73	\$ 36.98	\$ 38.23
Benefit 2	51.01	TBD	TBD
Benefit 3	71.28	TBD	TBD

Benefit 1 applies to straight time hours, paid holidays not worked.

Benefit 2 applies to over 8 hours in a day (M-F), irregular shift work hours worked, and Saturday hours worked. Benefit 3 applies to Sunday and Holiday hours worked.

#### **OVERTIME PAY**

See (B, E, Q, X) on OVERTIME PAGE

#### HOLIDAY

Paid: Overtime: See (5, 6, 15, 25) on HOLIDAY PAGE See (5, 6, 15, 16, 25) on HOLIDAY PAGE

When a recognized Holidays falls on Saturday or Sunday, holidays falling on Saturday shall be recognized or observed on Friday and holidays falling on Sunday shall be recognized or observed on Monday. Employees ordered to work on the Saturday or Sunday of the holiday or on the recognized or the observed Friday or Monday for those holidays falling on Saturday or Sunday shall receive double time the established rate and benefits for the holiday.

#### **REGISTERED APPRENTICES**

FOR APPRENTICE RATES, refer to the appropriate Laborer Heavy & Highway wage rate contained in the wage schedule for the County and location where the work is to be performed.

11-17/60/235/754Tun

12/01/2023

#### Lineman Electrician

#### JOB DESCRIPTION Lineman Electrician

# **DISTRICT** 6

#### ENTIRE COUNTIES

Albany, Allegany, Broome, Cattaraugus, Cayuga, Chautauqua, Chemung, Chenango, Clinton, Columbia, Cortland, Delaware, Dutchess, Erie, Essex, Franklin, Fulton, Genesee, Greene, Hamilton, Herkimer, Jefferson, Lewis, Livingston, Madison, Monroe, Montgomery, Niagara, Oneida, Onondaga, Ontario, Orange, Orleans, Oswego, Otsego, Putnam, Rensselaer, Rockland, Saratoga, Schenectady, Schoharie, Schuyler, Seneca, St. Lawrence, Steuben, Sullivan, Tioga, Tompkins, Ulster, Warren, Washington, Wayne, Wyoming, Yates

#### WAGES

A Lineman/Technician shall perform all overhead aerial work. A Lineman/Technician on the ground will install all electrical panels, connect all grounds, install and connect all electrical conductors, assembly of all electrical materials, conduit, pipe, or raceway; placing of fish wire; pulling of cables, wires or fiber optic cable through such raceways; splicing of conductors; dismantling of such structures, lines or equipment.

A Groundman/Truck Driver shall: Build and set concrete forms, handle steel mesh, set footer cages, transport concrete in a wheelbarrow, hand or machine concrete vibrator, finish concrete footers, mix mortar, grout pole bases, cover and maintain footers while curing in cold weather, operate jack hammer, operate hand pavement breaker, tamper, concrete and other motorized saws, as a drill helper, operate and maintain generators, water pumps, chainsaws, sand blasting, operate mulching and seeding machine, air tools, electric tools, gas tools, load and unload materials, hand shovel and/or broom, prepare and pour mastic and other fillers, assist digger operator/equipment operator in ground excavation and restoration, landscape work and painting. Only when assisting a lineman technician, a groundman/truck driver may assist in installing conduit, pipe, cables and equipment.

NOTE: Includes Teledata Work within ten (10) feet of High Voltage Transmission Lines. Also includes digging of holes for poles, anchors, footer, and foundations for electrical equipment.

Below rates applicable on all overhead and underground distribution and maintenance work, and all overhead and underground transmission line work and the installation of fiber optic cable where no other construction trades are or have been involved. (Ref #14.01.01)

Per hour:	07/01/2023	05/06/2024
Lineman, Technician	\$ 57.40	\$ 58.90
Crane, Crawler Backhoe	57.40	58.90
Welder, Cable Splicer	57.40	58.90
Digging Mach. Operator	51.66	53.01
Tractor Trailer Driver	48.79	50.07
Groundman, Truck Driver	45.92	47.12
Equipment Mechanic	45.92	47.12
Flagman	34.44	35.34

Additional \$1.00 per hour for entire crew when a helicopter is used.

Below rates applicable on all electrical sub-stations, switching structures, fiber optic cable and all other work not defined as "Utility outside electrical work". (Ref #14.02.01-A)

Lineman, Technician	\$ 57.40	\$ 58.90
Crane, Crawler Backhoe	57.40	58.90
Cable Splicer	63.14	64.79
Certified Welder,		
Pipe Type Cable	60.27	61.85
Digging Mach. Operator	51.66	53.01
Tractor Trailer Driver	48.79	50.07
Groundman, Truck Driver	45.92	47.12
Equipment Mechanic	45.92	47.12
Flagman	34.44	35.34

Additional \$1.00 per hour for entire crew when a helicopter is used.

Below rates apply on switching structures, maintenance projects, railroad catenary install/maintenance third rail installation, bonding of rails and pipe type cable and installation of fiber optic cable. (Ref #14.02.01-B)

Lineman, Tech, Welder	\$ 58.72	\$ 60.22
Crane, Crawler Backhoe	58.72	60.22
Cable Splicer	64.59	66.24
Certified Welder,		
Pipe Type Cable	61.66	63.23
Digging Mach. Operator	52.85	54.20
Tractor Trailer Driver	49.91	51.19
Groundman, Truck Driver	46.98	48.18
Equipment Mechanic	46.98	48.18
Flagman	35.23	36.13

Additional \$1.00 per hour for entire crew when a helicopter is used.

Below rates applicable on all overhead and underground transmission line work & fiber optic cable where other construction trades are or have been involved. This applies to transmission line work only, not other construction. (Ref #14.03.01)

Lineman, Tech, Welder	\$ 59.91	\$ 61.41
Crane, Crawler Backhoe	59.91	61.41
Cable Splicer	59.91	61.41
Digging Mach. Operator	53.92	55.27
Tractor Trailer Driver	50.92	52.20
Groundman, Truck Driver	47.93	49.13
Equipment Mechanic	47.93	49.13
Flagman	35.95	36.85

Additional \$1.00 per hour for entire crew when a helicopter is used.

NOTE: THE FOLLOWING RATES WILL APPLY ON ALL CONTRACTING AGENCY MANDATED MULTIPLE SHIFTS OF AT LEAST FIVE (5) DAYS DURATION WORKED BETWEEN THE HOURS LISTED BELOW:

1ST SHIFT	8:00 AM to 4:30 PM REGULAR RATE
2ND SHIFT	4:30 PM to 1:00 AM REGULAR RATE PLUS 17.3 %
3RD SHIFT	12:30 AM to 9:00 AM REGULAR RATE PLUS 31.4 %

NOTE - The "Employer Registration" (30.1) use of a '4 Day/10 Hour Work schedules' will no longer be accepted or processed. All registered projects prior to June 30, 2023 will expire within the granted time frame.

For Pre-Registered Projects Four (4), Ten (10) hour days may be worked at straight time during a week, Monday thru Thursday. Friday may be used as a make-up day. Tuesday thru Friday may be worked with no make-up day. For further clarification contact your local Bureau Office.

#### SUPPLEMENTAL BENEFITS

Per hour:

	07/01/2023	05/06/2024
Lineman, Technician,	\$ 29.40	\$ 30.90
or Equipment Operators	*plus 7% of	*plus 7% of
with Crane License	the hourly	the hourly

Page 35

	wage paid	wage paid
All other	\$ 26.40	\$ 26.90
Journeyman	*plus 7% of	*plus 7% of
	the hourly	the hourly
	wage paid	wage paid

\*The 7% is based on the hourly wage paid, straight time or premium time.

#### **OVERTIME PAY**

See (B, E, Q, X) on OVERTIME PAGE. \*Note\* Double time for all emergency work designated by the Dept. of Jurisdiction.

NOTE: WAGE CAP - Double the straight time hourly base wage shall be the maximum hourly wage compensation for any hour worked. Contractor is still responsible to pay the hourly benefit amount for each hour worked.

#### HOLIDAY

Paid	See (5, 6, 8, 13, 25) on HOLIDAY PAGE plus Governor of NYS Election Day.
Overtime	See (5, 6, 8, 13, 25) on HOLIDAY PAGE plus Governor of NYS Election Day.

NOTE: All paid holidays falling on Saturday shall be observed on the preceding Friday. All paid holidays falling on Sunday shall be observed on the following Monday. Supplements for holidays paid at straight time.

#### **REGISTERED APPRENTICES**

WAGES per hour: 1000 hour terms at the following percentage of the applicable Journeyman Lineman wage.

1st 60%	2nd 65%	3rd 70%	4th 75%	5th 80%	6th 85%	7th 90%
SUPPLEME	NTAL BENEFI	TS per hour:	07/01/2023		05/06/2024	
\$ 26.40 \$ 26.90 *plus 7% of *plus 7% of the hourly the hourly wage paid wage paid						
*The 7% is b	ased on the ho	ourly wage pai	d. straight time	e or premium t	ime.	

Lineman Electrician - Tele	data

JOB DESCRIPTION Lineman Electrician - Teledata

#### **DISTRICT** 6

6-1249a

12/01/2023

#### **ENTIRE COUNTIES**

Albany, Allegany, Broome, Cattaraugus, Cayuga, Chautauqua, Chemung, Chenango, Clinton, Columbia, Cortland, Delaware, Dutchess, Erie, Essex, Franklin, Fulton, Genesee, Greene, Hamilton, Herkimer, Jefferson, Lewis, Livingston, Madison, Monroe, Montgomery, Niagara, Oneida, Onondaga, Ontario, Orange, Orleans, Oswego, Otsego, Putnam, Rensselaer, Rockland, Saratoga, Schenectady, Schoharie, Schuyler, Seneca, St. Lawrence, Steuben, Sullivan, Tioga, Tompkins, Ulster, Warren, Washington, Wayne, Westchester, Wyoming, Yates

#### WAGES

#### Per hour:

For outside work, stopping at first point of attachment (demarcation).

	07/01/2023	01/01/2024	01/01/2025
Cable Splicer	\$ 37.73	\$ 39.24	\$ 40.81
Installer, Repairman	\$ 35.81	\$ 37.24	\$ 38.73
Teledata Lineman	\$ 35.81	\$ 37.24	\$ 38.73
Tech., Equip. Operator	\$ 35.81	\$ 37.24	\$ 38.73
Groundman	\$ 18.98	\$ 19.74	\$ 20.53

NOTE: EXCLUDES Teledata work within ten (10) feet of High Voltage (600 volts and over) transmission lines. For this work please see LINEMAN.

NOTE: THE FOLLOWING RATES WILL APPLY ON ALL CONTRACTING AGENCY MANDATED MULTIPLE SHIFTS OF AT LEAST FIVE (5) DAYS DURATION WORKED:

1ST SHIFT	REGULAR RATE
2ND SHIFT	REGULAR RATE PLUS 10%
3RD SHIFT	<b>REGULAR RATE PLUS 15%</b>

#### SUPPLEMENTAL BENEFITS

**DISTRICT** 6

Per hour:	07/01/2023	01/01/2024	01/01/2025	
Journeyman	\$ 5.70 *plus 3% of the hourly wage paid	\$ 5.70 *plus 3% of the hourly wage paid	\$ 5.70 *plus 3% of the hourly wage paid	

\*The 3% is based on the hourly wage paid, straight time rate or premium rate.

#### **OVERTIME PAY**

See (B, E, Q) on OVERTIME PAGE

NOTE: WAGE CAP - Double the straight time hourly base wage shall be the maximum hourly wage compensation for any hour worked. Contractor is still responsible to pay the hourly benefit amount for each hour worked.

н	0	LI	n	Δ	v	
	v	_	υ.	~		

Paid: Overtime:

See (1) on HOLIDAY PAGE
See (5, 6, 16) on HOLIDAY PAGE

6-1249LT - Teledata

Lineman Electrician - Traffic Signal, Lighting	12/01/2023

JOB DESCRIPTION Lineman Electrician - Traffic Signal, Lighting

ENTIRE COUNTIES

Columbia, Dutchess, Orange, Putnam, Rockland, Ulster

#### WAGES

Lineman/Technician shall perform all overhead aerial work. A Lineman/Technician on the ground will install all electrical panels, connect all grounds, install and connect all electrical conductors which includes, but is not limited to road loop wires; conduit and plastic or other type pipes that carry conductors, flex cables and connectors, and to oversee the encasement or burial of such conduits or pipes.

A Groundman/Truck Driver shall: Build and set concrete forms, handle steel mesh, set footer cages, transport concrete in a wheelbarrow, hand or machine concrete vibrator, finish concrete footers, mix mortar, grout pole bases, cover and maintain footers while curing in cold weather, operate jack hammer, operate hand pavement breaker, tamper, concrete and other motorized saws, as a drill helper, operate and maintain generators, water pumps, chainsaws, sand blasting, operate mulching and seeding machine, air tools, electric tools, gas tools, load and unload materials, hand shovel and/or broom, prepare and pour mastic and other fillers, assist digger operator/equipment operator in ground excavation and restoration, landscape work and painting. Only when assisting a lineman technician, a groundman/truck driver may assist in installing conduit, pipe, cables and equipment.

A flagger's duties shall consist of traffic control only. (Ref #14.01.02)

Per hour:	07/01/2023	05/06/2024
Lineman, Technician	\$ 50.60	\$ 51.82
Crane, Crawler Backhoe	50.60	51.82
Certified Welder	53.13	54.41
Digging Machine	45.54	46.64
Tractor Trailer Driver	43.01	44.05
Groundman, Truck Driver	40.48	41.46
Equipment Mechanic	40.48	41.46
Flagman	30.36	31.09

Above rates are applicable for installation, testing, operation, maintenance and repair on all Traffic Control (Signal) and Illumination (Lighting) projects, Traffic Monitoring Systems, and Road Weather Information Systems. Includes digging of holes for poles, anchors, footer foundations for electrical equipment; assembly of all electrical materials or raceway; placing of fish wire; pulling of cables, wires or fiber optic cable through such raceways; splicing of conductors; dismantling of such structures, lines or equipment.

NOTE: THE FOLLOWING RATES WILL APPLY ON ALL CONTRACTING AGENCY MANDATED MULTIPLE SHIFTS OF AT LEAST FIVE (5) DAYS DURATION WORKED BETWEEN THE HOURS LISTED BELOW:

1ST SHIFT	8:00 AM TO 4:30 PM REGULAR RATE
2ND SHIFT	4:30 PM TO 1:00 AM REGULAR RATE PLUS 17.3%
3RD SHIFT	12:30 AM TO 9:00 AM REGULAR RATE PLUS 31.4%

NOTE - The "Employer Registration" (30.1) use of a '4 Day/10 Hour Work schedules' will no longer be accepted or processed. All registered projects prior to June 30, 2023 will expire within the granted time frame.

For Pre-Registered Projects Four (4), Ten (10) hour days may be worked at straight time during a week, Monday thru Thursday. Friday may be used as a make-up day. Tuesday thru Friday may be worked with no make-up day. For further clarification contact your local Bureau Office.

#### SUPPLEMENTAL BENEFITS

Per hour worked (but also required on non-worked holidays):

	07/01/2023	05/06/2024
Lineman, Technician, or Equipment Operators with Crane License	\$ 29.40 *plus 7% of the hourly wage paid	\$ 30.90 *plus 7% of the hourly wage paid
All other Journeyman	\$ 26.40 *plus 7% of the hourly wage paid	\$ 26.90 *plus 7% of the hourly wage paid

\*The 7% is based on the hourly wage paid, straight time or premium time.

#### **OVERTIME PAY**

See (B, E, Q) on OVERTIME PAGE. \*Note\* Double time for all emergency work designated by the Dept. of Jurisdiction. NOTE: WAGE CAP - Double the straight time hourly base wage shall be the maximum hourly wage compensation for any hour worked. Contractor is still responsible to pay the hourly benefit amount for each hour worked.

#### HOLIDAY

Paid: See (5, 6, 8, 13, 25) on HOLIDAY PAGE and Governor of NYS Election Day. Overtime: See (5, 6, 8, 13, 25) on HOLIDAY PAGE and Governor of NYS Election Day.

NOTE: All paid holidays falling on Saturday shall be observed on the preceding Friday. All paid holidays falling on Sunday shall be observed on the following Monday. Supplements for holidays paid at straight time.

#### **REGISTERED APPRENTICES**

WAGES per hour: 1000 hour terms at the following percentage of the applicable Journeyman Lineman wage.

1st	2nd	3rd	4th	5th	6th	7th
60%	65%	70%	75%	80%	85%	90%

SUPPLEMENTAL BENEFITS per hour:

 07/01/2023
 05/06/2024

 \$ 26.40
 \$ 26.90

 \*plus 7% of
 \*plus 7% of

 the hourly
 the hourly

 wage paid
 wage paid

\*The 7% is based on the hourly wage paid, straight time or premium time.

Lineman Electrician - Tree Trimmer

JOB DESCRIPTION Lineman Electrician - Tree Trimmer

#### **ENTIRE COUNTIES**

Albany, Allegany, Broome, Cattaraugus, Cayuga, Chautauqua, Chemung, Chenango, Clinton, Columbia, Cortland, Delaware, Dutchess, Erie, Essex, Franklin, Fulton, Genesee, Greene, Hamilton, Herkimer, Jefferson, Lewis, Livingston, Madison, Monroe, Montgomery, Niagara, Oneida, Onondaga, Ontario, Orange, Orleans, Oswego, Otsego, Putnam, Rensselaer, Rockland, Saratoga, Schenectady, Schoharie, Schuyler, Seneca, St. Lawrence, Steuben, Sullivan, Tioga, Tompkins, Ulster, Warren, Washington, Wayne, Wyoming, Yates

#### WAGES

Applies to line clearance, tree work and right-of-way preparation on all new or existing energized overhead or underground electrical, telephone and CATV lines. This also would include stump removal near underground energized electrical lines, including telephone and CATV lines.

Per hour:	07/01/2023	12/31/2023
Tree Trimmer	\$ 29.80	\$ 31.44
Equipment Operator	26.35	27.80
Equipment Mechanic	26.35	27.80
Truck Driver	21.95	23.15
Groundman	18.07	19.07

6-1249aReg8LT **12/01/2023** 

#### **DISTRICT** 6

Flag person	14.20	14.20*

\*NOTE- Rate effective on 01/01/2024 - \$15.00 due to minimum wage increase

#### SUPPLEMENTAL BENEFITS

Per hour:

	07/01/2023	12/31/2023
Journeyman	\$ 10.48 *plus 4.5% of the hourly wage paid	\$ 10.48 *plus 4.5% of the hourly wage paid

\* The 3% is based on the hourly wage paid, straight time rate or premium rate.

#### **OVERTIME PAY**

See (B, E, Q, X) on OVERTIME PAGE

NOTE: WAGE CAP - Double the straight time hourly base wage shall be the maximum hourly wage compensation for any hour worked. Contractor is still responsible to pay the hourly benefit amount for each hour worked.

## HOLIDAY

Paid:	See (5, 6, 8, 15) on HOLIDAY PAGE
Overtime:	See (5, 6, 8, 15, 16, 25) on HOLIDAY PAGE
NOTE: All paid holidays fall	ing on a Saturday shall be observed on the preceding Friday.
All paid holidays falling on a	a Sunday shall be observed on the following Monday.

6-1249TT

Mason - Building				12/01/2023
JOB DESCRIPTION Mason - Building	g		DISTRICT 9	
ENTIRE COUNTIES Nassau, Rockland, Suffolk, Westchester	r			
WAGES Per hour:	07/01/2023	12/04/2023	06/03/2024	
	0110 112023	12/04/2023	00/00/2024	
Tile Finisher	\$ 48.36	\$ 48.80	Additional \$ 0.59	
SUPPLEMENTAL BENEFITS				
Per Hour:	\$ 22.56*	\$ 22.71*		
	+ \$9.86	+ \$9.86		
This portion of benefits subject to same	premium rate as show	n for overtime wages		
<b>OVERTIME PAY</b> See (B, E, Q, *V) on OVERTIME PAGE 'Work beyond 10 hours on a Saturday s	hall be paid at double t	he hourly wage rate.		
HOLIDAY Paid: See (1) on F	HOLIDAY PAGE			
	1, 15, 16, 25) on HOLIE	DAY PAGE		9-7/88A-ti
Mason - Building				12/01/2023
JOB DESCRIPTION Mason - Building	a		DISTRICT 9	
ENTIRE COUNTIES Nassau, Rockland, Suffolk, Westchester	- ſ			
WAGES				
Per hour:	07/01/2023	12/04/2023	06/05/2024 Additional	
Tile Setters	\$ 62.98	\$ 63.50	\$ 0.72	
SUPPLEMENTAL BENEFITS Per Hour:				
	\$ 25.61*	\$25.81*		
	+ \$10.04	+ \$10.04		

\* This portion of benefits subject to same premium rate as shown for overtime wages.

#### OVERTIME PAY

See (B, E, Q, V) on OVERTIME PAGE

Work beyond 10 hours on Saturday shall be paid at double the hourly wage rate.

Wage per hour:

(750 hour) term at the following wage rate:

Term:									
1st	2nd	3rd	4th	5th	6th	7th	8th	9th	10th
1-	751-	1501-	2251-	3001-	3751-	4501-	5251-	6001-	6501-
750	1500	2250	3000	3750	4500	5250	6000	6750	7000
07/04/0000									
07/01/2023	<b>\$</b> 06.66	¢00.75	¢20.00	¢40.05	¢45 70	¢40.00	\$54.23	¢57.00	<b>\$61.05</b>
\$21.70	\$26.66	\$33.75	\$38.69	\$42.25	\$45.70	\$49.29	\$04.Z3	\$57.09	\$61.25
12/04/2023									
\$21.96	\$26.95	\$34.10	\$39.08	\$42.68	\$46.16	\$49.79	\$54.77	57.66	\$61.90
				• .=					
Supplementa	I Benefits per	hour:							
1st	2nd	3rd	4th	5th	6th	7th	8th	9th	10th
07/01/2023									
\$12.55*	\$12.55*	\$15.36*	\$15.36*	\$16.36*	\$17.86*	\$18.86*	\$18.86*	\$16.86*	\$22.11*

\$12.55*	\$12.55*	\$15.36*	\$15.36*	\$16.36*	\$17.86*	\$18.86*	\$18.86*	\$16.86*	\$22.11*
+\$.73	+\$.78	+\$.88	+\$.88	+\$1.37	+\$1.42	+\$1.83	+\$1.88	+\$6.03	+\$6.61
12/04/2023 \$12.55* +\$0.73	\$12.55* +\$0.78	\$15.63* +\$0.89	\$15.36* +\$0.94	\$16.36* +\$1.38	\$17.86* +\$1.43	\$18.86* +\$1.84	\$18.86* +\$1.89	\$16.86* +\$6.04	\$22.11* +\$6.62

\* This portion of benefits subject to same premium rate as shown for overtime wages.

#### Mason - Building

#### JOB DESCRIPTION Mason - Building

ENTIRE COUNTIES Putnam, Rockland, Westchester

# PARTIAL COUNTIES

Orange: Only the Township of Tuxedo.

#### WAGES

Per hour:

		07/01/2023
Bricklayer\$ 45.89Cement Mason45.89Plasterer/Stone Mason45.89Pointer/Caulker45.89	Plasterer/Stone Mason	45.89

Additional \$1.00 per hour for power saw work

Additional \$0.50 per hour for swing scaffold or staging work

SHIFT WORK: When shift work or an irregular workday is mandated or required by state, federal, county, local or other governmental agency contracts, the following premiums apply:

Irregular workday requires 15% premium Second shift an additional 15% of wage plus benefits to be paid Third shift an additional 25% of wage plus benefits to be paid

#### SUPPLEMENTAL BENEFITS

Per hour:

Journeyman

DISTRICT 11

9-7/52A

12/01/2023

ov	ER	<b>TIME</b>	PAY
----	----	-------------	-----

Cement Maso All Others	<b>PAY</b>		, W ) on OVEF ) on OVERTI					
		See (5, 6, 16		DAY PAGE	rved on Mon	day. Wheneve	r any of the above	holidays fall on
REGISTERE Wages per ho	ED APPREN							
750 hour term	ns at the follow	wing percentag	ge of Journeym	ıan's wage				
1st 50%	2nd 55%	3rd 60%	4th 65%	5th 70%	6th 75%	7th 80%	8th 85%	
Supplementa	l Benefits per	hour						
750 hour term 1st 50%	ns at the follov 2nd 55%	wing percentag 3rd 60%	je of journeym 4th 65%	an supplemer 5th 70%	ts 6th 75%	7th 80%	8th 85%	
Apprentices i	ndentured bef	fore June 1st, 2	2011 receive fu	ull journeymar	benefits			11-5wp-b
Mason - Bu	ilding							12/01/2023
JOB DESCF	RIPTION Ma	ason - Building					<b>DISTRICT</b> 9	
ENTIRE CO Bronx, Dutche		assau, New Yo	ork, Orange, Pi	utnam, Queen	s, Richmond	, Rockland, Su	ffolk, Sullivan, Ulst	er, Westchester
WAGES Per Hour:								
				07/01/2023		7/03/2023		
Marble Cutter		FITS		07/01/2023 \$ 62.82		7/03/2023 \$ 63.12		
Marble Cutter <b>SUPPLEME</b> Per Hour:		EFITS						
<b>SUPPLEME</b> Per Hour: Journeyworke	NTAL BENE	EFITS						
SUPPLEME Per Hour: Journeyworke OVERTIME See (B, E, Q,	NTAL BENE er PAY			\$ 62.82		\$ 63.12		
SUPPLEME Per Hour: Journeyworke OVERTIME See (B, E, Q, HOLIDAY Paid:	NTAL BENE er PAY	TIME PAGE See (1) on H		\$ 62.82 \$ 39.03		\$ 63.12		
SUPPLEME Per Hour: Journeyworke OVERTIME See (B, E, Q, HOLIDAY Paid: Overtime: REGISTERE Wage Per Ho	NTAL BENE er PAY V) on OVER ED APPREN	TIME PAGE See (1) on H See (5, 6, 8,	OLIDAY PAGE 11, 15, 16, 25;	\$ 62.82 \$ 39.03		\$ 63.12		
SUPPLEME Per Hour: Journeyworke OVERTIME See (B, E, Q, HOLIDAY Paid: Overtime: REGISTERE Wage Per Ho 07/01/2023 750 hour term	NTAL BENE er PAY V) on OVER <sup>T</sup> ED APPREN ur: ns at the follov	TIME PAGE See (1) on H See (5, 6, 8, I <b>TICES</b> wing wage	11, 15, 16, 25)	\$ 62.82 \$ 39.03 = ) on HOLIDAY	PAGE	\$ 63.12 \$ 39.34	Oth	
SUPPLEME Per Hour: Journeyworke OVERTIME See (B, E, Q, HOLIDAY Paid: Overtime: REGISTERE Wage Per Ho 07/01/2023 750 hour term 1st	NTAL BENE er PAY V) on OVER ED APPREN ur: ns at the follov 2nd	TIME PAGE See (1) on H See (5, 6, 8, I <b>TICES</b> wing wage 3rd	11, 15, 16, 25 <u>)</u> 4th	\$ 62.82 \$ 39.03 = ) on HOLIDAY 5th	PAGE 6th	\$ 63.12 \$ 39.34 7th	8th	
SUPPLEME Per Hour: Journeyworke OVERTIME See (B, E, Q, HOLIDAY Paid: Overtime: REGISTERE Wage Per Ho 07/01/2023 750 hour term	NTAL BENE er PAY V) on OVER <sup>T</sup> ED APPREN ur: ns at the follov	TIME PAGE See (1) on H See (5, 6, 8, I <b>TICES</b> wing wage	11, 15, 16, 25)	\$ 62.82 \$ 39.03 = ) on HOLIDAY	PAGE	\$ 63.12 \$ 39.34	8th 7500+	
SUPPLEME Per Hour: Journeyworke OVERTIME See (B, E, Q, HOLIDAY Paid: Overtime: REGISTERE Wage Per Ho 07/01/2023 750 hour term 1st	NTAL BENE PAY V) on OVER ED APPREN uur: ns at the follow 2nd 3001-	TIME PAGE See (1) on H See (5, 6, 8, I <b>TICES</b> wing wage 3rd 3751-	11, 15, 16, 25 4th 4501-	\$ 62.82 \$ 39.03 = ) on HOLIDAY 5th 5251-	PAGE 6th 6001-	\$ 63.12 \$ 39.34 7th 6751-		
SUPPLEME Per Hour: Journeyworke OVERTIME See (B, E, Q, HOLIDAY Paid: Overtime: REGISTERE Wage Per Ho 07/01/2023 750 hour term 1st 0- 3000 \$ 26.42 Supplementa	NTAL BENE PAY V) on OVER ED APPREN ur: ns at the follow 2nd 3001- 3750 \$ 39.62	TIME PAGE See (1) on H See (5, 6, 8, I <b>TICES</b> wing wage 3rd 3751- 4500 \$ 42.91	11, 15, 16, 25) 4th 4501- 5250	\$ 62.82 \$ 39.03 ) on HOLIDAY 5th 5251- 6000	PAGE 6th 6001- 6750	\$ 63.12 \$ 39.34 7th 6751- 7500	7500+	
SUPPLEME Per Hour: Journeyworke OVERTIME See (B, E, Q, HOLIDAY Paid: Overtime: REGISTERE Wage Per Ho 07/01/2023 750 hour term 1st 0- 3000 \$ 26.42	NTAL BENE PAY V) on OVER ED APPREN ur: ns at the follow 2nd 3001- 3750 \$ 39.62	TIME PAGE See (1) on H See (5, 6, 8, I <b>TICES</b> wing wage 3rd 3751- 4500 \$ 42.91	11, 15, 16, 25) 4th 4501- 5250	\$ 62.82 \$ 39.03 ) on HOLIDAY 5th 5251- 6000	PAGE 6th 6001- 6750	\$ 63.12 \$ 39.34 7th 6751- 7500	7500+	

07/03/2023

Wage Per Hour:

12/01/2023

750 hour ter 1st	ms at the follo 2nd	wing wage. 3rd	4th	5th	6th	7th	8th	
0- 3000	3001- 3750	3751- 4500	4501- 5250	5251- 6000	6001- 6750	6751- 7500	7500+	
\$ 26.60	\$ 39.82	\$ 43.13	\$ 46.45	\$ 49.78	\$ 53.64	\$ 59.95	\$ 63.12	
Supplement	al Benefits Pe	r Hour:						
1st	2nd	3rd	4th	5th	6th	7th	8th	
\$ 25.54	\$ 29.09	\$ 29.97	\$ 30.84	\$ 31.72	\$ 36.73	\$ 38.48	\$ 39.34	

#### Mason - Heavy&Highway

#### JOB DESCRIPTION Mason - Heavy&Highway

#### ENTIRE COUNTIES

Putnam, Rockland, Westchester

#### PARTIAL COUNTIES

Orange: Only the Township of Tuxedo.

#### WAGES

Per hour:

0110112020
\$ 46.39
46.39
46.39
46.39
46.39

Additional \$1.00 per hour for power saw work Additional \$0.50 per hour for swing scaffold or staging work

SHIFT WORK: When shift work or an irregular workday is mandated or required by state, federal, county, local or other governmental contracts, the following rates apply:

Irregular workday requires 15% premium Second shift an additional 15% of wage plus benefits to be paid Third shift an additional 25% of wage plus benefits to be paid

07/01/2023

#### SUPPLEMENTAL BENEFITS

Per hour:

Journeyman	\$ 37.95
------------	----------

#### **OVERTIME PAY**

 Cement Mason
 See ( B, E, Q, W )

 All Others
 See ( B, E, Q, )

#### HOLIDAY

Paid: See (5, 6 Overtime: See (5, 6

See (5, 6, 16, 25) on HOLIDAY PAGE See (5, 6, 16, 25) on HOLIDAY PAGE

- Whenever any of the above holidays fall on Sunday, they will be observed on Monday. Whenever any of the above holidays fall on Saturday, they will be observed on Friday.

- Supplemental Benefits are not paid for paid Holiday

- If Holiday is worked, Supplemental Benefits are paid for hours worked.

- Whenever an Employee works within three (3) calendar days before a holiday, the Employee shall be paid for the Holiday.

#### **REGISTERED APPRENTICES**

Wages per hour:

750 hour terms at the following percentage of Journeyman's wage

1st	2nd	3rd	4th	5th	6th	7th	8th
50%	55%	60%	65%	70%	75%	80%	85%

Supplemental Benefits per hour

DISTRICT 11

Prevailing Wage Rates for 07/01/2023 - 06/30/2024 Last Published on Dec 01 2023						Pu		ork State Department of Labor 2023014800 Rockland County
750 hour	terms at the f	ollowing perce	ntage of journ	eyman supple	ments			
1st	2nd	3rd	4th	5th	6th	7th	8th	
50%	55%	60%	65%	70%	75%	80%	85%	
Apprentic	ces indentured	before June 1	lst, 2011 recei	ve full journey	man benefits			11-5WP-H/H

Operating Engineer - Building / Heavy&Highway 12/01/20	Operating Engineer - Building / Heavy&Highway	12/01/2023
--	---	------------

**DISTRICT** 11

#### **JOB DESCRIPTION** Operating Engineer - Building / Heavy&Highway

# **ENTIRE COUNTIES**

Delaware, Orange, Rockland, Sullivan, Ulster

#### WAGES

CLASS A5: Cranes, Derricks and Pile Drivers 100 tons or more and Tower Cranes, with 140ft boom and over. CLASS A4: Cranes, Derricks and Pile Drivers 100 tons or more and Tower Cranes, with 100ft to 139ft boom. CLASS A3: Cranes, Derricks and Pile Drivers 100 tons or more and Tower Cranes with a boom under 100ft. CLASS A2: Cranes, Derricks and Pile Drivers less than 100 tons with 140ft boom and over. CLASS A1: Cranes, Derricks and Pile Drivers less than 100 tons with 140ft boom and over. CLASS A1: Cranes, Derricks and Pile Drivers less than 100 tons with a 100ft to 139ft boom.

CLASS A: Cranes, Derricks and Pile Drivers less than 100 tons with a boom under 100ft.; Autograde Combination Subgrader, Base Material Spreader and Base Trimmer (CMI and Similar Types); Autograde Pavement profiler (CMI and Similar Types); Autograde Pavement Profiler and Recycle type (CMI and Similar Type); Autograde Placer-Trimmer-Spreader Comb. (CMI & Similar types); Autograde Slipform Paver (CMI & Similar Types); Central Power Plants (all types); Chief of Party; Concrete Paving Machines; Drill (Bauer, AMI and Similar Types); Drillmaster, Quarrymaster (Down the Hole Drill), Rotary Drill, Self-Propelled Hydraulic Drill, Self-Powered Drill; Draglines; Elevator Graders; Excavator; Front End Loaders (5 yds. and over); Gradalls; Grader-Rago; Helicopters (Co-Pilot); Helicopters (Communications Engineer);Juntann Pile Driver; Locomotive (Large); Mucking Machines; Pavement & Concrete Breaker, i.e., Superhammer & Hoe Ram; Roadway Surface Grinder; Prentice Truck; Scooper (Loader and Shovel); Shovels; Tree Chopper with Boom; Trench Machines (Cable Plow); Tunnel Boring Machine; Vacuum Truck

CLASS B: "A" Frame; Backhoe (Combination); Boom Attachment on Loaders (Rate based on size of Bucket) not applicable to Pipehook; Boring and Drilling Machines; Brush Chopper, Shredder and Tree Shredder, Tree Shearer; Bulldozer(Fine Grade); Cableways; Carryalls; Concrete Pump; Concrete Pumping System, Pump Concrete and Similar Types; Conveyors (125 ft. and over); Drill Doctor (duties incl. Dust Collector Maintenance); Front End Loaders (2 yds. but less than 5 yds.); Graders (Finish); Groove Cutting Machine (Ride on Type); Heater Planer; Hoists (all type Hoists, shall also include Steam, Gas, Diesel, Electric, Air Hydraulic, Single and Double Drum, Concrete, Brick Shaft Caisson, Snorkel Roof, and/or any other Similar Type Hoisting Machines, portable or stationary, except Chicago Boom Type); Long Boom Rate to be applied if Hoist is "Outside Material Tower Hoist"\*\*; Hydraulic Cranes-10 tons and under; Hydraulic Dredge; Hydro-Axe; Hydro Blaster; Jacks-Screw Air Hydraulic Power Operated Unit or Console Type (not hand Jack or Pile Load Test Type); Log Skidder; Pans; Pavers (all) concrete; Plate and Frame Filter Press; Pumpcrete Machines, Squeezecrete & Concrete Pumping (regardless of size); Scrapers; Side Booms; "Straddle"Carrier-Ross and similar types; Winch Trucks (Hoisting); Whip Hammer

CLASS C: Asphalt Curbing Machine; Asphalt Plant Engineer; Asphalt Spreader; Autograde Tube Finisher and Texturing Machine (CMI & Similar types); Autograde Curecrete Machine (CMI & Similar Types); Autograde Curb Trimmer & Sidewalk, Shoulder, Slipform (CMI & Similar Types); Bar Bending Machines (Power); Barrier Moving Machine-Zipper; Batchers, Batching Plant and Crusher on Site; Belt Conveyor Systems; Boom Type Skimmer Machines; Bridge Deck Finisher; Bulldozer(except fine grade); Car Dumpers (Railroad); Compressor and Blower Type Units (used independently or mounted on dual purpose Trucks, on Job Site or in conjunction with jobsite, in Loading and Unloading of Concrete, Cement, Fly Ash, Instantcrete, or Similar Type Materials); Compressors (2 or 3 in Battery); Concrete Finishing Machines; Concrete cleaning decontamination machine operator; Concrete Saws and Cutters (Ride-on type); Concrete Spreaders (Hetzel, Rexomatic and Similar Types); Concrete Vibrators; Conveyors (under 125 feet); Crushing Machines; Directional Boring Machines; Ditching Machine-small (Ditch-witch, Vermeer, or Similar type); Dope Pots (Mechanical with or without pump); Dumpsters; Elevator; Fireman; Fork Lifts (Economobile, Lull and Similar Types of Equipment); Front End Loaders (1 yd. and over but under 2 yds.); Generators (2 or 3 in Battery); Giraffe Grinders; Grout Pump; Gunnite Machines (excluding nozzle); Hammer Vibrator (in conjunction with Generator); Heavy Equipment Robotics Operator Technician; Hoists-Roof, Tugger, Aerial Platform Hoist & House Cars; Hoppers; Hopper Doors (power operated); Hydro Blaster; Hydraulic Jacking Trailer; Ladders (motorized); Laddervator; Locomotive-dinky type; Maintenance -Utility Man; Master Environmental Maintenance Technician; Mechanics; Mixers (Excepting Paving Mixers); Motor Patrols; Pavement Breakers (small self - propelled ride on type-also maintains compressor hydraulic unit); Pavement Breaker-truck mounted; Pipe Bending Machine (Power); Pitch Pump; Plaster Pump (regardless of size); Post Hole Digger (Post Pounder & Auger); Pot Hole Killer Trucks or equivalent; Rod Bending Machines (Power); Roller-Black Top; Scales (Power); Seaman pulverizing mixer; Shoulder widener; Silos; Skidsteer (all attachments); Skimmer Machines (boom-type); Steel Cutting Machine (service & maintain); Tam Rock Drill; Tractors; Transfer Machine; Captain (Power Boats); Tug Master (powerboats); Ultra High Pressure Waterjet Cutting Tool System operator/maintenance technician; Vacuum Blasting Machine; Vibrating Plants (used in conjunction with unloading); Welder and Repair Mechanics

#### Prevailing Wage Rates for 07/01/2023 - 06/30/2024 Last Published on Dec 01 2023

WAGES:(per hour)

CLASS D: Brooms and Sweepers; Chippers; Compressor (single); Concrete Spreaders (small type); Conveyor Loaders (not including Elevator Graders); Engines-large diesel (1620 HP) and Staging Pump; Farm Tractors; Fertilizing Equipment (Operation & Maintenance of); Fine Grade Machine (small type); Form Line Graders (small type); Front End Loader (under 1 yard); Generator (single); Grease, Gas, Fuel and Oil supply trucks; Heaters (Nelson or other type incl. Propane, Natural Gas or Flowtype Units); Lights, Portable Generating Light Plants; Mixers (Concrete, small); Mulching Equipment (Operation and Maintenance of); Pumps (2 or less than 4 inch suction); Pumps (4 inch suction and over incl. submersible pumps); Pumps (Diesel Engine and Hydraulic-immaterial of power); Road Finishing Machines (small type); Rollers-grade, fill or stone base; Seeding Equip. (Operation and Maintenance of); Sprinkler & Water Pump Trucks (used on jobsite or in conjunction with jobsite); Steam Jennies and Boilers-irrespective of use; Stone Spreader; Tamping Machines, Vibrating Ride-on; Temporary Heating Plant (Nelson or other type, incl. Propane, Natural Gas or Flow Type Units); Water & Sprinkler Trucks (used on or in conjunction with jobsite); Welding Machines (Gas, Diesel, and/or Electric Converters of any type, single, two, or three in a battery); Wellpoint Systems (including installation by Bull Gang and Maintenance of)

CLASS E: Assistant Engineer/Oiler; Drillers Helper; Maintenance Apprentice (Deck Hand); Maintenance Apprentice (Oiler); Mechanics' Helper; Tire Repair and Maintenance; Transit/Instrument Man

	07/01/2023	07/01/2024	07/01/2025
		Additional	Additional
Class A5	\$ 65.72 plus 4.00*	\$ 2.75***	\$ 2.50***
Class A4	64.72 plus 4.00*	2.75***	2.50***
Class A3	63.72 plus 4.00*	2.75***	2.50***
Class A2	61.22 plus 4.00*	2.75***	2.50***
Class A1	60.22 plus 4.00*	2.75***	2.50***
Class A	59.22 plus 4.00*	2.75***	2.50***
Class B	57.63 plus 4.00*	2.75***	2.50***
Class C	55.72 plus 4.00*	2.75***	2.50***
Class D	54.09 plus 4.00*	2.75***	2.50***
Class E	50.38 plus 4.00*	2.75***	2.50***
Safety Engineer	59.96 plus 4.00*	2.75***	2.50***
Helicopter:			
Pilot/Engineer	61.04 plus 4.00*	2.75***	2.50***
Co Pilot	59.22 plus 4.00*	2.75***	2.50***
Communications Engineer	59.22 plus 4.00*	2.75***	2.50***
Surveying:			
Chief of Party	59.22 plus 4.00*	2.75***	2.50***
Transit/Instrument Man	50.38 plus 4.00*	2.75***	2.50***
Rod/Chainman	49.80 plus 4.00*	2.75***	2.50***
Additional \$0.75 for Survey work T	-		
Additional CO 50 for Undragraphia	-		

Additional \$0.50 for Hydrographic work.

\*The \$4.00 is added to the Class Base Wage for all hours worked. Additionally, the \$4.00 is subject to the V-Code listed on the OVERTIME CODE Sheet.

\*\*Outside Material Hoist (Class B) receives additional \$ 1.00 per hour on 110 feet up to 199 feet total height, \$ 2.00 per hour on 200 feet and over total height.

\*\*\*To be allocated at a later date

- SHIFT WORK: On all Government mandated irregular or off shift work, an additional 15% on straight time hours.

- On HAZARDOUS WASTE REMOVAL or ASBESTOS REMOVAL work, or any state or federally DESIGNATED HAZARDOUS WASTE SITE:

For projects bid on or before April 1, 2020...Where the Operating Engineer is in direct contact with hazardous material and when personal protective equipment is required for respiratory, skin and eye protection, the Operating Engineer shall receive the hourly wage plus an additional twenty percent (20%) of that wage for the entire shift.

For projects bid after April 1, 2020...On hazardous waste removal work of any kind, including state or federally designated site where the operating engineer is required to wear level A, B, or C personal protection the operating engineer shall receive an hourly wage rate of his regular hourly wage plus \$5.00 per hour. An operating engineer working at a hazardous waste removal project or site at a task requiring hazardous waste related certification, but who is not working in a zone requiring level A, B, or C personal protection, shall receive an hourly wage rate of his regular rate plus \$ 1.00 per hour. This shall also apply to sites where the level D personal protection is required.

# SUPPLEMENTAL BENEFITS

Per hour:

See (B, E, Q, \*V, X) on OVERTIME PAGE

**REGISTERED APPRENTICES** 

1st year

2nd year

3rd year

4th year

Supplemental Benefits per hour:

Apprentices

**Operating Engineer - Marine Dredging** 

\*15% premium is also required on shift work benefits

Holidays falling on Sunday will be celebrated on Monday.

(1) year terms at the following percentage of journeyman's wage:

\$ 33.50

See (5, 6, 10, 13, 15) on HOLIDAY PAGE See (5, 6, 10, 13, 15) on HOLIDAY PAGE

\$ 33.50

SHIFT WORK: On all Government mandated irregular or off shift work, an additional 15% on straight time hours.

60% of Class base wage plus \$4.00\*

70% of Class base wage plus \$4.00\*

80% of Class base wage plus \$4.00\*

90% of Class base wage plus \$4.00\*

#### Journeyman

**OVERTIME PAY** 

HOLIDAY

Paid: Overtime:

JOB DESCRIPTION	Operating Engineer - Marine Dredging
ENTIDE COUNTIES	

ENTIRE COUNTIES

Albany, Bronx, Cayuga, Clinton, Columbia, Dutchess, Essex, Franklin, Greene, Jefferson, Kings, Monroe, Nassau, New York, Orange, Oswego, Putnam, Queens, Rensselaer, Richmond, Rockland, St. Lawrence, Suffolk, Ulster, Washington, Wayne, Westchester

\*The \$4.00 is added to the Class Base Wage for all hours worked. Additionally, the \$4.00 is subject to the V-Code listed on the OVERTIME

# WAGES

CODE Sheet.

These wages do not apply to Operating Engineers on land based construction projects. For those projects, please see the Operating Engineer Heavy/Highway Rates. The wage rates below for all equipment and operators are only for marine dredging work in navigable waters found in the counties listed above.

Per Hour:	07/01/2023	10/01/2023
CLASS A1 Deck Captain, Leverman Mechanical Dredge Operator Licensed Tug Operator 1000HP or more	\$ 43.94	\$ 45.26
CLASS A2 Crane Operator (360 swing)	39.16	40.33
CLASS B Dozer, Front Loader Operator on Land	To conform to Operating Engineer Prevailing Wage in locality where work is being performed including benefits.	
CLASS B1 Derrick Operator (180 swing) Spider/Spill Barge Operator Operator II, Fill Placer, Engineer, Chief Mate, Electrician, Chief Welder, Maintenance Engineer Licensed Boat, Crew Boat Operator	38.00	39.14
CLASS B2 Certified Welder	35.77	36.84
CLASS C1 Drag Barge Operator, Steward, Mate, Assistant Fill Placer	34.79	35.83

**DISTRICT** 4

11-825

12/01/2023

CLASS D Shoreman, Deckhand, Oiler, Rodman, Scowman, Cook, Messman, Porter/Janitor

# SUPPLEMENTAL BENEFITS

THE FOLLOWING SUPPLEMENTAL BENEFITS APPLY TO ALL CATEGORIES

All Classes A & B	\$ 11.85 plus 6% of straight time wage, Overtime hours add \$ 0.63	\$ 12.00 plus 6% of straight time wage, Overtime hours add \$ 0.63

27.97

\$ 11.60 plus 6%	\$ 11.75 plus 6%
of straight time	of straight time
wage, Overtime hours	wage, Overtime hours
add \$ 0.50	add \$ 0.50

All Class D

All Class C

\$ 11.35 plus 6% of straight time wage, Overtime hours add \$ 0.38

#### **OVERTIME PAY**

See (B2, F, R) on OVERTIME PAGE

HOLIDAY Paid: Overtime:

See (1) on HOLIDAY PAGE See (5, 6, 8, 15, 26) on HOLIDAY PAGE

#### **Operating Engineer - Steel Erectors**

JOB DESCRIPTION Operating Engineer - Steel Erectors

**ENTIRE COUNTIES** Delaware, Orange, Rockland, Sullivan, Ulster

#### WAGES

CLASS A3: Cranes, Derricks and Pile Drivers 100 tons or more and Tower Cranes, with a 140 ft. boom and over.

CLASS A2: Cranes, Derricks and Pile Drivers 100 tons or more and Tower Cranes, with up to a 139 ft. boom and under.

CLASS A1: Cranes, Derricks and Pile Drivers less than 100 tons with a 140 ft. boom and over.

CLASS A: Cranes, Derricks and Pile Drivers less than 100 tons with up to a 139 ft. boom and under.

CLASS B: "A" Frame; Cherry Pickers(10 tons and under); Hoists (all type Hoists, shall also include Steam, Gas, Diesel, Electric, Air Hydraulic, Single and Double Drum, Concrete, Brick Shaft Caisson, Snorkel Roof, and/or any other Similar Type Hoisting Machines, portable or stationary, except Chicago Boom Type); Jacks-Screw Air Hydraulic Power Operated Unit or Console Type (not hand Jack or Pile Load Test Type); Side Booms; Straddle Carrier

CLASS C: Aerial Platform used as Hoist; Compressors (2 or 3 in Battery); Concrete cleaning/ decontamination machine operator; Directional Boring Machines; Elevator or House Cars; Conveyers and Tugger Hoists; Fireman; Fork Lifts; Generators (2 or 3 in Battery); Heavy Equipment Robotics Operator/Technician; Master Environmental Maintenance Technician; Maintenance -Utility Man; Rod Bending Machines (Power); Captain(powerboat); Tug Master; Ultra High Pressure Waterjet Cutting Tool System; Vacuum Blasting Machine; Welding Machines(gas or electric,2 or 3 in battery, including diesels); Transfer Machine; Apprentice Engineer/Oiler with either one compressor or one welding machine when used for decontamination and remediation

CLASS D: Compressor (single); Welding Machines (Gas, Diesel, and/or Electric Converters of any type); Welding System Multiple (Rectifier Transformer type)

4-25a-MarDredge

12/01/2023

Published by the New York State Department of Labor PRC Number 2023014800 Rockland County

34.68

28.81

\$ 11.60 plus 6%

wage, Overtime hours

**DISTRICT** 11

of straight time

add \$ 0.50

CLASS E: Assistant Engineer/Oiler; Maintenance Apprentice (Deck Hand);Drillers Helper; Maintenance Apprentice (Oiler); Mechanics' Helper; Transit/Instrument Man

#### WAGES:(per hour)

	07/01/2023	07/01/2024 Additional	07/01/2025 Additional
Class A3	\$ 67.74 plus 4.00*	\$ 2.75**	\$ 2.50**
Class A2	66.08 plus 4.00*	2.75**	2.50**
Class A1	63.24 plus 4.00*	2.75**	2.50**
Class A	61.58 plus 4.00*	2.75**	2.50**
Class B	58.79 plus 4.00*	2.75**	2.50**
Class C	56.13 plus 4.00*	2.75**	2.50**
Class D	54.60 plus 4.00*	2.75**	2.50**
Class E	50.84 plus 4.00*	2.75**	2.50**
Vacuum Truck	59.55 plus 4.00*	2.75**	2.50**
Safety Engineer	60.41 plus 4.00*	2.75**	2.50**
,			
Helicopter:			
Pilot/Engineer	63.24 plus 4.00*	2.75**	2.50**
Co Pilot	62.85 plus 4.00*	2.75**	2.50**
Communications Engineer	62.85 plus 4.00*	2.75**	2.50**
Surveying:			
Chief of Party	59.55 plus 4.00*	2.75**	2.50**
Transit/Instrument man	50.84 plus 4.00*	2.75**	2.50**
	•		
Rod/Chainman	49.80 plus 4.00*	2.75**	2.50**
Additional \$0.75 for Survey work Tu			

Additional \$0.50 for Hydrographic work.

\*The \$4.00 is added to the Class Base Wage for all hours worked. Additionally, the \$4.00 is subject to the V-Code listed on the OVERTIME CODE Sheet.

#### \*\*To be allocated at a later date

- SHIFT WORK: On all Government mandated irregular or off shift work, an additional 15% on straight time hours.

- On HAZARDOUS WASTE REMOVAL or ASBESTOS REMOVAL work, or any state or federally DESIGNATED HAZARDOUS WASTE SITE:

For projects bid on or before April 1, 2020...Where the Operating Engineer is in direct contact with hazardous material and when personal protective equipment is required for respiratory, skin and eye protection, the Operating Engineer shall receive the hourly wage plus an additional twenty percent (20%) of that wage for the entire shift.

For projects bid after April 1, 2020...On hazardous waste removal work of any kind, including state or federally designated site where the operating engineer is required to wear level A, B, or C personal protection the operating engineer shall receive an hourly wage rate of his regular hourly wage plus \$5.00 per hour. An operating engineer working at a hazardous waste removal project or site at a task requiring hazardous waste related certification, but who is not working in a zone requiring level A, B, or C personal protection, shall receive an hourly wage rate of his regular rate plus \$ 1.00 per hour. This shall also apply to sites where the level D personal protection is required.

#### SUPPLEMENTAL BENEFITS

Per hour:

```
Journeyman
```

\$ 33.50

**OVERTIME PAY** See (B, E, Q, \*V, X) on OVERTIME PAGE \*15% premium is also required on shift work benefits

#### HOLIDAY

Paid: See (5, 6, 10, 13, 15) on HOLIDAY PAGE Overtime: See (5, 6, 10, 13, 15) on HOLIDAY PAGE Holidays falling on Sunday will be celebrated on Monday.

#### **REGISTERED APPRENTICES**

(1) year terms at the following percentage of journeyman's wage.

1st year	60% of Class base wage plus \$4.00*
2nd year	70% of Class base wage plus \$4.00*
3rd year	80% of Class base wage plus \$4.00*

#### 4th year

\*The \$4.00 is added to the Class Base Wage for all hours worked. Additionally, the \$4.00 is subject to the V-Code listed on the OVERTIME CODE Sheet.

90% of Class base wage plus \$4.00\*

#### Supplemental Benefits per hour:

Apprentices	\$ 33.50			11-825SE
Painter				12/01/2023
JOB DESCRIPTION Painter			DISTRICT 1	
ENTIRE COUNTIES Rockland				
WAGES				
Wages per hour				
	07/01/2023	07/01/2024		
		Additional		
Brush/Paper Hanger	\$ 41.17	+ \$1.93*		
Dry Wall finisher	41.17	+ \$1.93*		
Sandblaster-Painter	41.17	+ \$1.93*		
Lead Abatement	41.17	+ \$1.93*		
Spray Rate	42.17	+ \$1.93*		

(\*) To be allocated at later date.

See Bridge Painters rates for the following work: Structural Steel, all work performed on tanks, ALL BRIDGES, towers, smoke stacks, flag poles. Rate shall apply to all of said areas from the ground up.

#### SUPPLEMENTAL BENEFITS

Per hour

Journeyperson \$26.28

OVERTIME PAY See (B, E, E2, Q) on OVERTIME PAGE

HOLIDAY	
Paid:	See (1) on HOLIDAY PAGE
Overtime:	See (5, 6) on HOLIDAY PAGE

#### **REGISTERED APPRENTICES**

Wages per hour

Six (6) month terms at the following percentage of Journeyperson's wage

1st	2nd	3rd	4th	5th	6th
50%	55%	65%	75%	85%	95%

Supplemental Benefits per hour worked

1st term	\$ 11.14
All others	26.28

#### 1-155ROC

#### Painter - Bridge & Structural Steel

#### JOB DESCRIPTION Painter - Bridge & Structural Steel

#### **ENTIRE COUNTIES**

Albany, Bronx, Clinton, Columbia, Dutchess, Essex, Franklin, Fulton, Greene, Hamilton, Kings, Montgomery, Nassau, New York, Orange, Putnam, Queens, Rensselaer, Richmond, Rockland, Saratoga, Schenectady, Schoharie, Suffolk, Sullivan, Ulster, Warren, Washington, Westchester

WAGES

Per Hour: STEEL: Bridge Painting:

07/01/2023 \$ 54.50

10/01/2023 \$ 56.00 Page 48 12/01/2023

#### **DISTRICT** 8

+ 10.10\* + 10.35\*

ADDITIONAL \$6.50 per hour for POWER TOOL/SPRAY, whether straight time or overtime.

NOTE: All premium wages are to be calculated on base rate per hour only.

\* For the period of May 1st to November 15th, this amount is payable up to 40 hours. For the period of Nov 16th to April 30th, this amount is payable up to 50 hours. EXCEPTION: First and last week of employment, and for the weeks of Memorial Day, Independence Day and Labor Day, where the amount is paid for the actual number of hours worked (no cap).

NOTE: Generally, for Bridge Painting Contracts, ALL WORKERS on and off the bridge (including Flagmen) are to be paid Painter's Rate; the contract must be ONLY for Bridge Painting.

#### SHIFT WORK:

Per Hour:

When directly specified in public agency or authority contract documents for an employer to work a second shift and works the second shift with employees other than from the first shift, all employees who work the second shift will be paid 10% of the base wage shift differential in lieu of overtime for the first eight (8) hours worked after which the employees shall be paid at time and one half of the regular wage rate. When a single irregular work shift is mandated in the job specifications or by the contracting agency, wages shall be paid at time and one half for single shifts between the hours of 3pm-11pm or 11pm-7am.

#### SUPPLEMENTAL BENEFITS

Journeyworker:		
	\$ 11.78	\$ 12.43
	+ 30.85*	+ 31.55*

\* For the period of May 1st to November 15th, this amount is payable up to 40 hours. For the period of Nov 16th to April 30th, this amount is payable up to 50 hours. EXCEPTION: First and last week of employment, and for the weeks of Memorial Day, Independence Day and Labor Day, where the amount is paid for the actual number of hours worked (no cap).

## OVERTIME PAY

See (B, F, R) on OVERTIME PAGE

#### HOLIDAY

INCLIDAT	
Paid:	See (1) on HOLIDAY PAGE
Overtime:	See (4, 6) on HOLIDAY PAGE

#### **REGISTERED APPRENTICES**

Wage - Per hour:

Apprentices: (1) year terms.

1st year	\$ 21.80 + 4.04	\$ 22.40 + 4.14
2nd year	\$ 32.70 + 6.06	\$ 33.60 + 6.21
3rd year	\$ 43.60 + 8.08	\$ 44.80 + 8.28
Supplemental Benefits - Per hour:	+ 0.00	+ 0.20
1st year	\$ .90 + 12.34	\$ 1.16 + 12.62
2nd year	\$ 7.07 + 18.51	\$ 7.46 + 18.93
3rd year	\$ 9.42 + 24.68	\$ 9.94 + 25.24

NOTE: All premium wages are to be calculated on base rate per hour only.

Painter - Line Striping

# JOB DESCRIPTION Painter - Line Striping

# **ENTIRE COUNTIES**

Albany, Clinton, Columbia, Dutchess, Essex, Franklin, Fulton, Greene, Hamilton, Montgomery, Nassau, Orange, Putnam, Rensselaer, Rockland, Saratoga, Schenectady, Schoharie, Suffolk, Sullivan, Ulster, Warren, Washington, Westchester

1.

# 12/01/2023

8-DC-9/806/155-BrSS

#### DISTRICT 8

#### WAGES

Per	hour:
1 61	nour.

Per nour.			
Painter (Striping-Highway):	07/01/2023	01/01/2024	07/01/2024
Striping-Machine Operator*	\$ 31.53	\$ 31.53	\$ 34.12
Linerman Thermoplastic	38.34	38.34	41.12

Note: \* Includes but is not limited to: Positioning of cones and directing of traffic using hand held devices. Excludes the Driver/Operator of equipment used in the maintenance and protection of traffic safety.

NOTE - The "Employer Registration" (30.1) use of a '4 Day/10 Hour Work schedules' will no longer be accepted or processed. All registered projects prior to June 30,2023 will expire within the granted time frame.

For Pre-Registered Projects Four (4), Ten (10) hour days may be worked at straight time during a week, Monday thru Thursday. Friday may be used as a make-up day. Tuesday thru Friday may be worked with no make-up day. For further clarification contact your local Bureau Office.

SUPPLEMENTAL BENE Per hour paid: Journeyworker: Striping Machine Operator: Linerman Thermoplastic: OVERTIME PAY	FITS \$ 10.03 10.03	\$ 22.24 22.24	\$ 23.65 23.65	
See (B, B2, E2, F, S) on O\	/ERTIME PAGE			
<b>HOLIDAY</b> Paid: Overtime:	See (5, 20) on HOLIDAY PAGE See (5, 20) on HOLIDAY PAGE			
<b>REGISTERED APPREN</b> One (1) year terms at the fo				
1st Term:	\$ 15.00	\$ 15.00	\$ 15.00	
2nd Term:	18.92	18.92	20.47	
3rd Term:	25.22	25.22	27.30	
Supplemental Benefits per l	nour:			
1st term:	\$ 9.16	\$ 22.24	\$ 23.65	
2nd Term:	10.03	22.24	23.65	
3rd Term:	10.03	22.24	23.65	
				8-1456-LS
Painter - Metal Polisher				12/01/2023

#### JOB DESCRIPTION Painter - Metal Polisher

#### **DISTRICT** 8

#### **ENTIRE COUNTIES**

Albany, Allegany, Bronx, Broome, Cattaraugus, Cayuga, Chautauqua, Chemung, Chenango, Clinton, Columbia, Cortland, Delaware, Dutchess, Erie, Essex, Franklin, Fulton, Genesee, Greene, Hamilton, Herkimer, Jefferson, Kings, Lewis, Livingston, Madison, Monroe, Montgomery, Nassau, New York, Niagara, Oneida, Onondaga, Ontario, Orange, Orleans, Oswego, Otsego, Putnam, Queens, Rensselaer, Richmond, Rockland, Saratoga, Schenectady, Schoharie, Schuyler, Seneca, St. Lawrence, Steuben, Suffolk, Sullivan, Tioga, Tompkins, Ulster, Warren, Washington, Wayne, Westchester, Wyoming, Yates

#### WAGES

	07/01/2023
Metal Polisher	\$ 38.18
Metal Polisher*	39.28
Metal Polisher**	42.18

\*Note: Applies on New Construction & complete renovation \*\* Note: Applies when working on scaffolds over 34 feet.

SUPPLEMENTAL BENEFITS Per Hour:	07/01/2023
Journeyworker: All classification	\$ 12.34

#### **OVERTIME PAY**

See (B, E, P, T) on OVERTIME PAGE

#### HOLIDAY

See  $(5,\,6,\,11,\,15,\,16,\,25,\,26)$  on HOLIDAY PAGE See  $(5,\,6,\,9,\,11,\,15,\,16,\,25,\,26)$  on HOLIDAY PAGE Paid: Overtime:

# **REGISTERED APPRENTICES**

Wages per hour:

One (1) year term at the following wage rates:

	07/01/2023
1st year	\$ 16.00
2nd year	17.00
3rd year	18.00
1st year*	\$ 16.39
2nd year*	17.44
3rd year*	18.54
1st year**	\$ 18.50
2nd year**	19.50
3rd year**	20.50

\*Note: Applies on New Construction & complete renovation \*\* Note: Applies when working on scaffolds over 34 feet.

Supplemental benefits: Per hour:

1st year	\$ 8.69
2nd year	8.69
3rd year	8.69

#### Plumber

#### JOB DESCRIPTION Plumber

#### **ENTIRE COUNTIES**

Orange, Rockland, Sullivan

#### PARTIAL COUNTIES

Ulster: Only the Townships of Plattekill, Marlboro, Wawarsing, and Shawangunk (except for Wallkill and Shawangunk Prisons).

#### WAGES

REFRIGERATION: For commercial and industrial refrigeration which means service, maintenance, and installation work where the combined compressor tonnage does not exceed 40 tons.

AIR CONDITIONING: Air conditioning to be installed that is water cooled shall not exceed 25 tons. This will include the piping of the component system and erection of water tower. Air conditioning that is air cooled shall not exceed 50 tons.

WAGES: (per hour)			
, , , , , , , , , , , , , , , , , , ,	07/01/2023	05/01/2024	05/01/2025
		Additional	Additional
Plumber	\$ 38.59	\$ 2.25*	\$ 2.50*

\*To be allocated at a later date

Star Certification: an additional \$ 1.00 per hour over scale will be paid to all those who have Star Certification.

Shift Differential: When mandated by the governmental agency, an additional 15% premium will be paid for irregular work day or for 2nd and 3rd shift.

#### SUPPLEMENTAL BENEFITS

Per hour: Journeyman

\$ 36.07\*

\*For overtime or shift differential work, \$0.10 is paid at straight time, the remaining balance is paid at the same premium as the wages.

#### **OVERTIME PAY**

8-8A/28A-MP 12/01/2023

#### **DISTRICT** 11

**DISTRICT** 11

#### See (B, G, P, \*V) on OVERTIME PAGE

\* A portion of the benefit amount is subject to the V code for overtime and shift differential work.

HOLIDAY	
Paid:	See (5, 6, 13, 15, 25) on HOLIDAY PAGE
Overtime:	See (5, 6, 13, 15, 25) on HOLIDAY PAGE

#### **REGISTERED APPRENTICES**

(1)year terms at the following wage.

	07/01/2023
1st term	\$ 17.37
2nd term	21.23
3rd term	25.09
4th term	28.95
5th term	32.81

Supplemental Benefits per hour: Apprentices

1st term	\$ 16.31*
2nd term	19.90*
3rd term	23.50*
4th term	27.10*
5th term	30.69*

\*For overtime or shift differential work, \$0.10 is paid at straight time, the remaining balance is paid at the same premium as the wages. 11-373 Refrig

Plumber	12/01/2023

#### JOB DESCRIPTION Plumber

ENTIRE COUNTIES

Orange, Rockland, Sullivan

#### PARTIAL COUNTIES

Ulster: Only the Townships of Plattekill, Marlboro, Wawarsing, and Shawangunk (except for Wallkill and Shawangunk Prisons).

WAGES:(per hour)	07/01/2023	05/01/2024
		Additional
Plumber/Steamfitter	\$ 49.95	\$ 2.25*

\*to be allocated at a later date

Note: For all work 40-60 feet above ground add \$ 0.25 per hour, over 60 feet add \$ 0.50 per hour.

Shift Differential: When mandated by the governmental agency, an additional 15% premium will be paid for irregular work day or for 2nd and 3rd shift.

#### SUPPLEMENTAL BENEFITS

Per hour:

WAGES

Journeyman \$44.57

\*For overtime or shift differential work, \$0.10 is paid at straight time, the remaining balance is paid at the same premium as the wages.

#### **OVERTIME PAY**

See (B, E, Q, \*V) on OVERTIME PAGE

\* A portion of the benefit amount is subject to the V code for overtime and shift differential work.

#### HOLIDAY

Paid: Overtime: See (1) on HOLIDAY PAGE See (5, 6, 15, 16) on HOLIDAY PAGE

When a holiday falls on a Saturday, the day prior shall be considered and recognized as the holiday. When a holiday falls on a Sunday, the day proceeding shall be considered and recognized as the holiday to be observed.

#### **REGISTERED APPRENTICES**

(1) year terms at the following wages.

( ) jean termie at the remember of gee.	
	07/01/2023
1st term	\$ 17.49
2nd term	22.48
3rd term	27.48
4th term	32.47

5th term	39.96
Supplemental Benefits per h	our:
1st term	\$ 15.69*
2nd term	20.14*
3rd term	24.57*
4th term	29.03*
5th term	35.67*

\*For overtime or shift differential work, \$0.10 is paid at straight time, the remaining balance is paid at the same premium as the wages. 11-373 SF

Roofer						12/01/2023
JOB DESCRIPTION Roof	er				DISTRICT 9	
ENTIRE COUNTIES Bronx, Dutchess, Kings, New	York Orange	Putnam Q	leens Richm	and Rockland Sulliv	van Illster Westchester	
	ron, orange,	, i utilaini, ee				
VAGES Per Hour:		07/01/2023		05/01/2024		
		0110112025		Additional		
Roofer/Waterproofer		\$ 46.50		\$2.50		
and the second	+	\$7.00*				
This portion is not subjected	d to overtime p	remiums.				
Note: Abatement/Removal of	Asbestos cont	aining roofs	and roofing m	aterial is classified a	as Roofer.	
SUPPLEMENTAL BENEF		-	Ţ			
Per Hour:		\$ 31.37				
<b>OVERTIME PAY</b> See (B, H) on OVERTIME PA	AGE					
Note: An observed holiday th		ınday will be	observed the	following Monday.		
HOLIDAY						
Paid: S	See (1) on HOL See (5, 6) on H	IDAY PAGE OLIDAY PA	GE			
REGISTERED APPRENTI	ICES					
1 ) year term apprentices in						
1st	2nd	3rd	4th			
\$ 16.28	\$ 23.25 + 3.50*	\$ 27.90 + 4.20*	\$ 34.88 + 5.26*			
Supplements:	+ 5.50	+ 4.20	+ 5.26			
1st	2nd	3rd	4th			
\$ 4.03	\$ 15.85	\$ 18.95	\$ 23.61			
This portion is not subjected	d to overtime p	remiums.				
(1) year term apprentices in	dentured after	01/01/2023				
1st	2nd	3rd	4th	5th		
\$ 17.67	\$ 20.93	\$ 23.25	\$ 27.90	\$ 34.88		
	+ 3.16*	+ 3.50*	+ 4.20*	+ 5.26		
Supplements:		01	411	<b>C</b> 41-		
1st \$ 7.61	2nd \$ 14.29	3rd \$ 15.85	4th \$ 18.95	5th \$ 23.61		
φ /.01	ψ 14.23	φ 10.00	φ 10.30	φ 20.01		
This portion is not subjected	d to overtime p	remiums.				9-8F
Sheetmetal Worker						12/01/2023
encounter normer						. 2/0 1/2020
JOB DESCRIPTION Shee	tmetal Worker				DISTRICT 8	

ENTIRE COUNTIES Dutchess, Orange, Putnam, Rockland, Sullivan, Ulster, Westchester WAGES

07/01/2023
\$ 47.00
+ 3.60*

\*This portion is not subject to overtime premiums.

#### SHIFT WORK

For all NYS D.O.T. and other Governmental mandated off-shift work: 10% increase for additional shifts for a minimum of five (5) days

#### SUPPLEMENTAL BENEFITS Journeyworker

\$ 45.62

#### **OVERTIME PAY**

OVERTIME:.. See ( B, E, Q, ) on OVERTIME PAGE.

#### HOLIDAY

Paid:See (1) on HOLIDAY PAGEOvertime:See (5, 6, 8, 15, 16, 23) on HOLIDAY PAGE

#### **REGISTERED APPRENTICES**

1st	2nd	3rd	4th	5th	6th	7th	8th
\$ 17.50	\$ 19.67	\$ 21.87	\$ 24.05	\$ 26.24	\$ 28.44	\$ 31.10	\$ 33.75
+ 1.44*	+ 1.62*	+ 1.80*	+ 1.98*	+ 2.16*	+ 2.34*	+ 2.52*	+ 2.70*

\*This portion is not subject to overtime premiums.

Supplemental Benefits per hour:

Apprentices		
1st term	\$ 19.53	
2nd term	21.99	
3rd term	24.42	
4th term	26.88	
5th term	29.32	
6th term	31.75	
7th term	33.72	
8th term	35.71	
		8-38

#### **Sheetmetal Worker**

12/01/2023

JOB DESCRIPTION Sheetmetal Worker       DISTRICT 4         ENTIRE COUNTIES       Bronx, Kings, Nassau, New York, Queens, Richmond, Rockland, Suffolk, Westchester       4         WAGES       07/01/2023       56.00	
Bronx, Kings, Nassau, New York, Queens, Richmond, Rockland, Suffolk, Westchester WAGES Per Hour: 07/01/2023	
Per Hour: 07/01/2023	
Sign Erector \$ 56.00	
NOTE: Structurally Supported Overhead Highway Signs(See STRUCTURAL IRON WORKER CLASS)	
SUPPLEMENTAL BENEFITS	
Per Hour: 07/01/2023	
Sign Erector \$ 55.66	
OVERTIME PAY See (A, F, S) on OVERTIME PAGE	
HOLIDAY           Paid:         See (5, 6, 10, 11, 12, 16, 25) on HOLIDAY PAGE           Overtime:         See (5, 6, 10, 11, 12, 16, 25) on HOLIDAY PAGE	
REGISTERED APPRENTICES Per Hour:	
6 month Terms at the following percentage of Sign Erectors wage rate:	
1st 2nd 3rd 4th 5th 6th 7th 8th 9th 1	0th
35%         40%         45%         50%         55%         60%         65%         70%         75%         8	0%
SUPPLEMENTAL BENEFITS Per Hour:	
07/01/2023	

1st 2nd 3rd 4th 5th 6th 7th 8th 9th 10th

\$ 14.95	\$ 16.95	\$ 18.93	\$ 20.93	\$ 28.56	\$ 31.05	\$ 33.57	\$ 36.05	\$ 38.56	\$ 41.05
									4-137-SE
Sprinkler F	itter								12/01/2023
	RIPTION Spr	inkler Fitter					DISTRICT	1	
ENTIRE CO	-		ıllivan, Ulster,	Westchester			DioTitio		
VAGES Per hour		07/01/2023							
Sprinkler Fitter		\$ 50.86							
<b>OUPPLEME</b> Per hour	ENTAL BENE	FITS							
ourneyperso	on	\$ 30.19							
VERTIME ee (B, E, Q)	PAY ) on OVERTIM	E PAGE							
<b>IOLIDAY</b> Paid:		See (1) on H(		-					
lote: When ne double tin	me rate. When	See (̀5́, 6) on on Sunday, th a holiday falls		GE nday shall be			l work perform a holiday and a		
Note: When he double tin lay shall be a <b>REGISTERI</b>	me rate. When at the double ti ED APPREN	See (̀5́, 6) on on Sunday, th a holiday falls me rate.	HOLIDAY PA e following Mc	GE nday shall be					
Note: When he double tin day shall be a <b>REGISTERI</b> Nages per ho	me rate. When at the double ti ED APPREN	See (5, 6) on on Sunday, th a holiday falls me rate. <b>TICES</b>	HOLIDAY PA e following Mc on Saturday,	GE nday shall be					
lote: When ne double tin ay shall be a <b>REGISTERI</b> Vages per ho	ne rate. When at the double ti ED APPREN our	See (5, 6) on on Sunday, th a holiday falls me rate. <b>TICES</b>	HOLIDAY PA e following Mc on Saturday,	GE nday shall be					
Note: When he double tin lay shall be a <b>REGISTERI</b> Vages per ho Dne Half Yea 1st \$ 24.77	ne rate. When at the double ti E <b>D APPREN</b> our ar terms at the 2nd	See (5, 6) on on Sunday, th a holiday falls me rate. <b>TICES</b> following wage 3rd \$ 30.03	HOLIDAY PA e following Mc on Saturday, e. 4th	GE inday shall be the preceding 5th	Friday shall b	e considered a 7th	a holiday and a 8th	all work perforr 9th	ned on either 10th
Note: When the double tin lay shall be a <b>REGISTERI</b> Vages per ho Dhe Half Yea 1st \$ 24.77	ne rate. When at the double ti ED APPREN our ar terms at the 2nd \$ 27.53	See (5, 6) on on Sunday, th a holiday falls me rate. <b>TICES</b> following wage 3rd \$ 30.03	HOLIDAY PA e following Mc on Saturday, e. 4th	GE inday shall be the preceding 5th	Friday shall b	e considered a 7th	a holiday and a 8th	all work perforr 9th	10th \$ 49.30 10th \$ 20.57
lote: When ne double tin ay shall be a <b>REGISTERI</b> Vages per ho Dne Half Yea 1st \$ 24.77 Supplementa 1st \$ 8.74	ne rate. When at the double ti ED APPREN our ar terms at the 2nd \$ 27.53 al Benefits per 1 2nd	See (5, 6) on on Sunday, th a holiday falls me rate. <b>TICES</b> following wage 3rd \$ 30.03 hour 3rd \$ 20.32	HOLIDAY PA e following Mc on Saturday, e. 4th \$ 32.78 4th \$ 20.32	GE inday shall be the preceding 5th \$ 35.53 5th	Friday shall b 6th \$ 38.29 6th	7th \$ 41.04 7th	a holiday and a 8th \$ 43.79 8th	9th \$ 46.54 9th	10th \$ 49.30 10th \$ 20.57 1-669.
lote: When ne double tin ay shall be a <b>REGISTERI</b> Vages per ho Dne Half Yea 1st \$ 24.77 Supplementa 1st \$ 8.74 <b>Teamster -</b>	ne rate. When at the double ti ED APPREN our ar terms at the 2nd \$ 27.53 al Benefits per 2nd \$ 8.74	See (5, 6) on on Sunday, th a holiday falls me rate. <b>TICES</b> following wage 3rd \$ 30.03 hour 3rd \$ 20.32 <b>eavy&amp;Highw</b>	HOLIDAY PA e following Mc on Saturday, e. 4th \$ 32.78 4th \$ 20.32	GE inday shall be the preceding \$ 35.53 5th \$ 20.57	Friday shall b 6th \$ 38.29 6th	7th \$ 41.04 7th	a holiday and a 8th \$ 43.79 8th	9th \$ 46.54 9th \$ 20.57	10th \$ 49.30 10th \$ 20.57 1-669.
he double tin day shall be a <b>REGISTERI</b> Nages per ho Dne Half Yea 1st \$ 24.77 Supplementa 1st \$ 8.74 Teamster - JOB DESCI ENTIRE CO	ne rate. When at the double ti ED APPREN our ar terms at the 2nd \$ 27.53 al Benefits per 1 2nd \$ 8.74 Building / H RIPTION Tea	See (5, 6) on on Sunday, th a holiday falls me rate. <b>TICES</b> following wage 3rd \$ 30.03 hour 3rd \$ 20.32 <u>eavy&amp;Highw</u> amster - Buildin	HOLIDAY PA e following Mc on Saturday, e. 4th \$ 32.78 4th \$ 20.32 <u>/ay</u> ng / Heavy&Hi	GE inday shall be the preceding \$ 35.53 5th \$ 20.57	Friday shall b 6th \$ 38.29 6th	7th \$ 41.04 7th	8th \$ 43.79 8th \$ 20.57	9th \$ 46.54 9th \$ 20.57	ned on either 10th \$ 49.30 10th

GROUP 1: LeTourneau Tractors, Double Barrel Euclids, Athney Wagons and similar equipment (except when hooked to scrapers), I-Beam and Pole Trailers, Tire Trucks, Tractor and Trailers with 5 axles and over, Articulated Back Dumps and Road Oil Distributors, Articulated Water Trucks and Fuel Trucks/Trailers, positions requiring a HAZMAT CDL endorsement.

GROUP 1A: Drivers on detachable Gooseneck Low Bed Trailers rated over 35 tons.

GROUP 2: All equipment 25 yards and up to and including 30 yard bodies and cable Dump Trailers and Powder and Dynamite Trucks.

GROUP 3: All Equipment up to and including 24-yard bodies, Mixer Trucks, Dump Crete Trucks and similar types of equipment, Fuel Trucks, Batch Trucks and all other Tractor Trailers, Hi-Rail Truck.

GROUP 4: Tri-Axles, Ten Wheelers, Grease Trucks, Tillerman, Pattern Trucks, Attenuator Trucks, Water Trucks, Bus.

GROUP 5: Straight Trucks.

GROUP 6: Pick-up Trucks for hauling materials and parts, and Escort Man over-the-road.

WAGES: (per hour)

07/01/2023

GROUP 1	\$ 34.58
GROUP 1A	35.72
GROUP 2	34.02
GROUP 3	33.80
GROUP 4	33.69
GROUP 5	33.57
GROUP 6	33.57

#### NOTE ADDITIONAL PREMIUMS:

- On projects requiring an irregular shift a premium of 10% will be paid on wages. The premium will be paid for off-shift or irregular shift work when mandated by Governmental Agency.

- Employees engaged in hazardous/toxic waste removal, on a State or Federally designated hazardous/toxic waste site, where the employee comes in contact with hazardous/toxic waste material and when personal protective equipment is required for respiratory, skin, or eye protection, the employee shall receive an additional 20% premium above the hourly wage.

NOTE - The 'Employer Registration' (30.1) use of a '4 Day/10 Hour Work schedules' will no longer be accepted or processed. All registered projects prior to June 30,2023 will expire within the granted time frame.

For Pre-Registered Projects Four (4), Ten (10) hour days may be worked at straight time during a week, Monday thru Thursday. Friday may be used as a make-up day. Tuesday thru Friday may be worked with no make-up day. For further clarification contact your local Bureau Office

#### SUPPLEMENTAL BENEFITS

Per hour:	
First 40 hours	\$ 44.59
Over 40 hours	36.99

#### **OVERTIME PAY**

See (\*B, E, \*\*E2, \*\*\*P, X) on OVERTIME PAGE \*Holidays worked Monday through Friday receive Double Time (2x) after 8 hours. \*\*Makeup day limited to the employees who were working on the site that week. \*\*\*Sunday Holidays are paid at a rate of double time and one half (2.5x) for all hours worked.

#### HOLIDAY

Paid: Overtime: See (5, 6, 15, 25) on HOLIDAY PAGE See (\*1) on HOLIDAY PAGE

- Any employee working two (2) days in any calendar week during which a holiday occurs shall receive a days pay for each holiday occurring during said week. This provision shall also apply if a holiday falls on a Saturday or Sunday.

\*See OVERTIME PAY section for when additional premium is applicable on Holiday hours worked.

#### 11-445B/HH

12/01/2023

**DISTRICT** 11

#### Teamster - Delivery - Building / Heavy&Highway

JOB DESCRIPTION Teamster - Delivery - Building / Heavy&Highway

# **ENTIRE COUNTIES**

Dutchess, Orange, Rockland, Sullivan, Ulster

#### WAGES

Group 1	Tractor Trailer Drivers
Group 2	Tri- Axle

Wages:	07/01/2023
Group 1	\$ 33.70
Group 2	29.70

Hazardous/Toxic Waste Removal additional 20% when personal protective equipment is required.

#### SUPPLEMENTAL BENEFITS

Per hour paid: First 40 hours \$ 32.30 Over 40 hours 0.00

#### **OVERTIME PAY**

See (B, E, Q, X) on OVERTIME PAGE

#### HOLIDAY

See (5, 13, 15, 16, 20, 22, 25, 26) on HOLIDAY PAGE See (5, 13, 15, 16, 20, 22, 25, 26) on HOLIDAY PAGE Paid:

Overtime:

- Employee must work either the scheduled day of work before or the scheduled day of work after the holiday in the workweek.

- Any employee working one (1) day in the calendar week during which a holiday occurs shall receive a day's pay for each holiday occurring during said week. This provision shall also apply if a holiday falls on a Saturday.

- When any of the recognized holidays occur on Sunday and are celebrated any day before or after the holiday Sunday, such days shall be considered as the holiday and paid for as such.

11-445 B/HH Delivery

12/01/2023

#### Welder

#### JOB DESCRIPTION Welder

#### **DISTRICT** 1

ENTIRE COUNTIES

Albany, Allegany, Bronx, Broome, Cattaraugus, Cayuga, Chautauqua, Chemung, Chenango, Clinton, Columbia, Cortland, Delaware, Dutchess, Erie, Essex, Franklin, Fulton, Genesee, Greene, Hamilton, Herkimer, Jefferson, Kings, Lewis, Livingston, Madison, Monroe, Montgomery, Nassau, New York, Niagara, Oneida, Onondaga, Ontario, Orange, Orleans, Oswego, Otsego, Putnam, Queens, Rensselaer, Richmond, Rockland, Saratoga, Schenectady, Schoharie, Schuyler, Seneca, St. Lawrence, Steuben, Suffolk, Sullivan, Tioga, Tompkins, Ulster, Warren, Washington, Wayne, Westchester, Wyoming, Yates

#### WAGES Per hour

07/01/2023

Welder: To be paid the same rate of the mechanic performing the work.\*

\*EXCEPTION: If a specific welder certification is required, then the 'Certified Welder' rate in that trade tag will be paid.

#### **OVERTIME PAY**

HOLIDAY

1-As Per Trade

#### **Overtime Codes**

Following is an explanation of the code(s) listed in the OVERTIME section of each classification contained in the attached schedule. Additional requirements may also be listed in the HOLIDAY section.

NOTE: Supplemental Benefits are 'Per hour worked' (for each hour worked) unless otherwise noted

- (AA) Time and one half of the hourly rate after 7 and one half hours per day
- (A) Time and one half of the hourly rate after 7 hours per day
- (B) Time and one half of the hourly rate after 8 hours per day
- (B1) Time and one half of the hourly rate for the 9th & 10th hours week days and the 1st 8 hours on Saturday.
   Double the hourly rate for all additional hours
- (B2) Time and one half of the hourly rate after 40 hours per week
- (C) Double the hourly rate after 7 hours per day
- (C1) Double the hourly rate after 7 and one half hours per day
- (D) Double the hourly rate after 8 hours per day
- (D1) Double the hourly rate after 9 hours per day
- (E) Time and one half of the hourly rate on Saturday
- (E1) Time and one half 1st 4 hours on Saturday; Double the hourly rate all additional Saturday hours
- (E2) Saturday may be used as a make-up day at straight time when a day is lost during that week due to inclement weather
- (E3) Between November 1st and March 3rd Saturday may be used as a make-up day at straight time when a day is lost during that week due to inclement weather, provided a given employee has worked between 16 and 32 hours that week
- (E4) Saturday and Sunday may be used as a make-up day at straight time when a day is lost during that week due to inclement weather
- (E5) Double time after 8 hours on Saturdays
- (F) Time and one half of the hourly rate on Saturday and Sunday
- (G) Time and one half of the hourly rate on Saturday and Holidays
- (H) Time and one half of the hourly rate on Saturday, Sunday, and Holidays
- (I) Time and one half of the hourly rate on Sunday
- (J) Time and one half of the hourly rate on Sunday and Holidays
- (K) Time and one half of the hourly rate on Holidays
- (L) Double the hourly rate on Saturday
- (M) Double the hourly rate on Saturday and Sunday
- (N) Double the hourly rate on Saturday and Holidays
- (O) Double the hourly rate on Saturday, Sunday, and Holidays
- (P) Double the hourly rate on Sunday
- (Q) Double the hourly rate on Sunday and Holidays
- (R) Double the hourly rate on Holidays
- (S) Two and one half times the hourly rate for Holidays

- (S1) Two and one half times the hourly rate the first 8 hours on Sunday or Holidays One and one half times the hourly rate all additional hours.
- (T) Triple the hourly rate for Holidays
- (U) Four times the hourly rate for Holidays
- (V) Including benefits at SAME PREMIUM as shown for overtime
- (W) Time and one half for benefits on all overtime hours.
- (X) Benefits payable on Paid Holiday at straight time. If worked, additional benefit amount will be required for worked hours. (Refer to other codes listed.)

#### Holiday Codes

PAID Holidays:

Paid Holidays are days for which an eligible employee receives a regular day's pay, but is not required to perform work. If an employee works on a day listed as a paid holiday, this remuneration is in addition to payment of the required prevailing rate for the work actually performed.

OVERTIME Holiday Pay:

Overtime holiday pay is the premium pay that is required for work performed on specified holidays. It is only required where the employee actually performs work on such holidays. The applicable holidays are listed under HOLIDAYS: OVERTIME. The required rate of pay for these covered holidays can be found in the OVERTIME PAY section listings for each classification.

Following is an explanation of the code(s) listed in the HOLIDAY section of each classification contained in the attached schedule. The Holidays as listed below are to be paid at the wage rates at which the employee is normally classified.

- (1) None
- (2) Labor Day
- (3) Memorial Day and Labor Day
- (4) Memorial Day and July 4th
- (5) Memorial Day, July 4th, and Labor Day
- (6) New Year's, Thanksgiving, and Christmas
- (7) Lincoln's Birthday, Washington's Birthday, and Veterans Day
- (8) Good Friday
- (9) Lincoln's Birthday
- (10) Washington's Birthday
- (11) Columbus Day
- (12) Election Day
- (13) Presidential Election Day
- (14) 1/2 Day on Presidential Election Day
- (15) Veterans Day
- (16) Day after Thanksgiving
- (17) July 4th
- (18) 1/2 Day before Christmas
- (19) 1/2 Day before New Years
- (20) Thanksgiving
- (21) New Year's Day
- (22) Christmas
- (23) Day before Christmas
- (24) Day before New Year's
- (25) Presidents' Day
- (26) Martin Luther King, Jr. Day
- (27) Memorial Day
- (28) Easter Sunday

(29) Juneteenth

#### New York State Department of Labor - Bureau of Public Work State Office Building Campus Building 12 - Room 130 Albany, New York 12226

### **REQUEST FOR WAGE AND SUPPLEMENT INFORMATION**

As Required	by Articles 8	and 9 of the NYS	Labor Law

Fax (518) 485-1870 or mail this form for new schedules or for determination for additional occupations.

### This Form Must Be Typed

Submitted By:         (Check Only One)         Contracting Agency         Architect or Engineering	Firm Public Work District Office Date:
A. Public Work Contract to be let by: (Enter Data Pertaining to C	Contracting/Public Agency)
1. Name and complete address (Check if new or change)	2. NY State Units (see Item 5).       07 City         01 DOT       08 Local School District         02 OGS       09 Special Local District, i.e.,         03 Dormitory Authority       Fire, Sewer, Water District         04 State University       10 Village         Construction Fund       11 Town         05 Mental Hygiene       12 County
Telephone Fax	Facilities Corp. 13 Other Non-N.Y. State
E-Mail: 3. SEND REPLY TO (check if new or change) Name and complete address:	<ul> <li>4. SERVICE REQUIRED. Check appropriate box and provide project information.</li> <li>New Schedule of Wages and Supplements. <ul> <li>APPROXIMATE BID DATE :</li> </ul> </li> <li>Additional Occupation and/or Redetermination</li> </ul>
Telephone Fax E-Mail:	PRC NUMBER ISSUED PREVIOUSLY FOR     OFFICE USE ONLY       THIS PROJECT :
B. PROJECT PARTICULARS	
Project Title     Description of Work     Contract Identification Number     Note: For NYS units, the OSC Contract No.	6. Location of Project: Location on Site Route No/Street Address Village or City Town County
7. Nature of Project - Check One:         1. New Building         2. Addition to Existing Structure         3. Heavy and Highway Construction (New and Repair)         4. New Sewer or Waterline         5. Other New Construction (Explain)         6. Other Reconstruction, Maintenance, Repair or Alteration         7. Demolition         8. Building Service Contract	8.       OCCUPATION FOR PROJECT :       Fuel Delivery         Construction (Building, Heavy Highway/Sewer/Water)       Guards, Watchmen Janitors, Porters, Cleaners, Elevator Operators         Tunnel       Moving furniture and equipment         Landscape Maintenance       Trash and refuse removal         Exterminators, Fumigators       Window cleaners         Fire Safety Director, NYC Only       Other (Describe)
9. Does this project comply with the Wicks Law involving separ	rate bidding? YES NO
10. Name and Title of Requester	Signature



## LIST OF EMPLOYERS INELIGIBLE TO BID ON OR BE AWARDED ANY PUBLIC WORK CONTRACT

Under Article 8 and Article 9 of the NYS Labor Law, a contractor, sub-contractor and/or its successor shall be debarred and ineligible to submit a bid on or be awarded any public work or public building service contract/sub-contract with the state, any municipal corporation or public body for a period of five (5) years from the date of debarment when:

- Two (2) final determinations have been rendered within any consecutive six-year (6) period determining that such contractor, sub-contractor and/or its successor has WILLFULLY failed to pay the prevailing wage and/or supplements;
- One (1) final determination involves falsification of payroll records or the kickback of wages and/or supplements.

The agency issuing the determination and providing the information, is denoted under the heading 'Fiscal Officer'. DOL = New York State Department of Labor; NYC = New York City Comptroller's Office; AG = New York State Attorney General's Office; DA = County District Attorney's Office.

**Debarment Database:** To search for contractors, sub-contractors and/or their successors debarred from bidding or being awarded any public work contract or subcontract under NYS Labor Law Articles 8 and 9, <u>or</u> under NYS Workers' Compensation Law Section 141-b, access the database at this link: <u>https://apps.labor.ny.gov/EDList/searchPage.do</u>

## For inquiries where WCB is listed as the "Agency", please call 1-866-546-9322

AGENCY	Fiscal Officer	FEIN	EMPLOYER NAME	EMPLOYER DBA NAME	ADDRESS	DEBARMENT START DATE	DEBARMENT END DATE
DOL	DOL	*****5754	0369 CONTRACTORS, LLC		515 WEST AVE UNIT PH 13NORWALK CT 06850	05/12/2021	05/12/2026
DOL	DOL	*****4018	ADIRONDACK BUILDING RESTORATION INC.		4156 WILSON ROAD EAST TABERG NY 13471	03/26/2019	03/26/2024
DOL	AG	*****1812	ADVANCED BUILDERS & LAND DEVELOPMENT, INC.		400 OSER AVE #2300HAUPPAUGE NY 11788	09/11/2019	09/11/2024
DOL	DOL	*****1687	ADVANCED SAFETY SPRINKLER INC		261 MILL ROAD P.O BOX 296EAST AURORA NY 14052	05/29/2019	05/29/2024
DOL	NYC		ALL COUNTY SEWER & DRAIN, INC.		7 GREENFIELD DR WARWICK NY 10990	03/25/2022	03/25/2027
DOL	NYC		AMJED PARVEZ		401 HANOVER AVENUE STATEN ISLAND NY 10304	01/11/2021	01/11/2026
DOL	DOL		ANGELO F COKER		2610 SOUTH SALINA STREET SUITE 14SYRACUSE NY 13205	09/17/2020	09/17/2025
DOL	DOL		ANGELO GARCIA		515 WEST AVE UNIT PH 13NORWALK CT 06850	05/12/2021	05/12/2026
DOL	DOL		ANGELO TONDO		449 WEST MOMBSHA ROAD MONROE NY 10950	06/06/2022	06/06/2027
DOL	DOL		ANITA SALERNO		158 SOLAR ST SYRACUSE NY 13204	01/07/2019	01/07/2024
DOL	DOL	*****4231	ANKER'S ELECTRIC SERVICE, INC.		10 SOUTH 5TH ST LOCUST VALLEY NY 11560	09/26/2022	09/26/2027
DOL	NYC		ARADCO CONSTRUCTION CORP		115-46 132RD ST SOUTH OZONE PARK NY 11420	09/17/2020	09/17/2025
DOL	DOL		ARNOLD A. PAOLINI		1250 BROADWAY ST BUFFALO NY 14212	02/03/2020	02/03/2025
DOL	NYC		ARSHAD MEHMOOD		168-42 88TH AVENUE JAMAICA NY 11432	11/20/2019	11/20/2024
DOL	NYC		AVM CONSTRUCTION CORP		117-72 123RD ST SOUTH OZONE PARK NY 11420	09/17/2020	09/17/2025
DOL	NYC		AZIDABEGUM		524 MCDONALD AVENUE BROOKLYN NY 11218	09/17/2020	09/17/2025
DOL	DOL	*****8421	B & B DRYWALL, INC		206 WARREN AVE APT 1WHITE PLAINS NY 10603	12/14/2021	12/14/2026
DOL	NYC		BALWINDER SINGH		421 HUDSON ST SUITE C5NEW YORK NY 10014	02/20/2019	02/20/2024
DOL	NYC	*****8416	BEAM CONSTRUCTION, INC.		50 MAIN ST WHITE PLAINS NY 10606	01/04/2019	01/04/2024
DOL	DOL		BERNARD BEGLEY		38 LONG RIDGE ROAD BEDFORD NY 10506	12/18/2019	12/18/2024
DOL	NYC	*****2113	BHW CONTRACTING, INC.		401 HANOVER AVENUE STATEN ISLAND NY 10304	01/11/2021	01/11/2026
DOL	DOL	****3627	BJB CONSTRUCTION CORP.		38 LONG RIDGE ROAD BEDFORD NY 10506	12/18/2019	12/18/2024
DOL	DOL	****5078	BLACK RIVER TREE REMOVAL, LLC		29807 ANDREWS ROAD BLACK RIVER NY 13032	10/17/2023	10/17/2028
DOL	DOL	****4512	BOB BRUNO EXCAVATING, INC		5 MORNINGSIDE DR AUBURN NY 13021	05/28/2019	05/28/2024
DOL	DOL		BOGDAN MARKOVSKI		370 W. PLEASANTVIEW AVE SUITE 2.329HACKENSACK NJ 07601	02/11/2019	02/11/2024
DOL	DOL		BRADLEY J SCHUKA		4 BROTHERS ROAD WAPPINGERS FALLS NY 12590	10/20/2020	10/20/2025
DOL	DOL	*****9383	C.C. PAVING AND EXCAVATING, INC.		2610 SOUTH SALINA ST SUITE 12SYRACUSE NY 13205	09/17/2020	09/17/2025
DOL	DOL	*****4083	C.P.D. ENTERPRISES, INC		P.O BOX 281 WALDEN NY 12586	03/03/2020	03/03/2025
DOL	DOL	****5161	CALADRI DEVELOPMENT CORP.		1223 PARK ST. PEEKSKILL NY 10566	05/17/2021	05/17/2026
DOL	DOL	*****3391	CALI ENTERPRISES, INC.		1223 PARK STREET PEEKSKILL NY 10566	05/17/2021	05/17/2026
DOL	NYC		CALVIN WALTERS		465 EAST THIRD ST MT. VERNON NY 10550	09/09/2019	09/09/2024
DOL	DOL	*****4155	CASA BUILDERS, INC.	FRIEDLANDER CONSTRUCTI ON		05/10/2023	05/10/2028
DOL	AG	****7247	CENTURY CONCRETE CORP		2375 RAYNOR ST RONKONKOMA NY 11779	08/04/2021	08/04/2026

DOL	DOL	*****0026	CHANTICLEER CONSTRUCTION LLC		4 BROTHERS ROAD WAPPINGERS FALLS NY 12590	10/20/2020	10/20/2025
DOL	NYC	*****2117	CHARAN ELECTRICAL ENTERPRISES		9-11 40TH AVENUE LONG ISLAND CITY NY 11101	09/26/2023	09/26/2028
DOL	NYC		CHARLES ZAHRADKA		863 WASHINGTON STREET FRANKLIN SQUARE NY 11010	03/10/2020	03/10/2025
DOL	DOL		CHRISTOPHER GRECO		26 NORTH MYRTLE AVENUE SPRING VALLEY NY 10956	02/18/2021	02/18/2026
DOL	DOL		CHRISTOPHER PAPASTEFANOU A/K/A CHRIS PAPASTEFANOU		1445 COMMERCE AVE BRONX NY 10461	05/30/2019	05/30/2024
DOL	DOL		CRAIG JOHANSEN		10 SOUTH 5TH ST LOCUST VALLEY NY 11560	09/26/2022	09/26/2027
DOL	DOL	*****3228	CROSS-COUNTY LANDSCAPING AND TREE SERVICE, INC.	ROCKLAND TREE SERVICE	26 NORTH MYRTLE AVENUE SPRING VALLEY NY 10956	02/18/2021	02/18/2026
DOL	DOL	****2524	CSI ELECTRICAL & MECHANICAL INC		42-32 235TH ST DOUGLASTON NY 11363	01/14/2019	01/14/2024
DOL	DOL	****7619	DANCO CONSTRUCTION UNLIMITED INC.		485 RAFT AVENUE HOLBROOK NY 11741	10/19/2021	10/19/2026
DOL	DOL		DANIEL ROBERT MCNALLY		7 GREENFIELD DRIVE WARWICK NY 10990	03/25/2022	03/25/2027
DOL	DOL		DARIAN L COKER		2610 SOUTH SALINA ST SUITE 2CSYRACUSE NY 13205	09/17/2020	09/17/2025
DOL	DOL		DAVID FRIEDLANDER		64 NORTH PUTT CORNERS RD NEW PALTZ NY 12561	05/10/2023	05/10/2028
DOL	NYC		DAVID WEINER		14 NEW DROP LANE 2ND FLOORSTATEN ISLAND NY 10306	11/14/2019	11/14/2024
DOL	DOL		DELPHI PAINTING & DECORATING CO INC		1445 COMMERCE AVE BRONX NY 10461	05/30/2019	05/30/2024
DOL	DOL		DINA TAYLOR		64 N PUTT CONNERS RD NEW PALTZ NY 12561	05/10/2023	05/10/2028
DOL	DOL	*****5175	EAGLE MECHANICAL AND GENERAL CONSTRUCTION LLC		11371 RIDGE RD WOLCOTT NY 14590	02/03/2020	02/03/2025
DOL	AG		EDWIN HUTZLER		23 NORTH HOWELLS RD BELLPORT NY 11713	08/04/2021	08/04/2026
DOL	DA		EDWIN HUTZLER		2375 RAYNOR STREET RONKONKOMA NY 11779	08/04/2021	08/04/2026
DOL	DOL	*****0780	EMES HEATING & PLUMBING CONTR		5 EMES LANE MONSEY NY 10952	01/20/2002	01/20/3002
DOL	NYC	*****5917	EPOCH ELECTRICAL, INC		97-18 50TH AVE CORONA NY 11368	04/19/2018	04/19/2024
DOL	DOL		FAIGY LOWINGER		11 MOUNTAIN RD 28 VAN BUREN DRMONROE NY 10950	03/20/2019	03/20/2024
DOL	DA		FREDERICK HUTZLER		2375 RAYNOR STREET RONKONKOMA NY 11779	08/04/2021	08/04/2026
DOL	NYC	*****6616	G & G MECHANICAL ENTERPRISES, LLC.		1936 HEMPSTEAD TURNPIKE EAST MEDOW NY 11554	11/29/2019	11/29/2024
DOL	DOL		GABRIEL FRASSETTI			04/10/2019	04/10/2024
DOL	NYC		GAYATRI MANGRU		21 DAREWOOD LANE VALLEY STREAM NY 11581	09/17/2020	09/17/2025
DOL	DA		GEORGE LUCEY		150 KINGS STREET BROOKLYN NY 11231	01/19/1998	01/19/2998
DOL	DOL		GIGI SCHNECKENBURGER		261 MILL RD EAST AURORA NY 14052	05/29/2019	05/29/2024
DOL	DA		GIOVANNA TRAVALJA		3735 9TH ST LONG ISLAND CITY NY 11101	01/05/2023	01/05/2028
DOL	DA	*****0213	GORILLA CONTRACTING GROUP, LLC		505 MANHATTAN AVE WEST BABYLON NY 11704	10/05/2023	10/05/2028
DOL	DOL		HANS RATH		24 ELDOR AVENUE NEW CITY NY 10956	02/03/2020	02/03/2025
DOL	DOL		HERBERT CLEMEN		42 FOWLER AVENUE CORTLAND MANOR NY 10567	01/24/2023	01/24/2028
DOL	DOL		HERBERT CLEMEN		42 FOWLER AVENUE CORTLAND MANOR NY 10567	10/25/2022	10/25/2027
DOL	DOL		IRENE KASELIS		32 PENNINGTON AVE WALDWICK NJ 07463	05/30/2019	05/30/2024
DOL	DOL	*****9211	J. WASE CONSTRUCTION CORP.		8545 RT 9W ATHENS NY 12015	03/09/2021	03/09/2026
DOL	DOL		J.M.J CONSTRUCTION		151 OSTRANDER AVENUE SYRACUSE NY 13205	11/21/2022	11/21/2027

DOL	DOL		J.R. NELSON CONSTRUCTION		531 THIRD STREET ALBANY NY 12206	12/22/2022	12/22/2027
DOL	DOL		J.R. NELSON CONSTRUCTION		531 THIRD STREET ALBANY NY 12206	10/25/2022	10/25/2027
DOL	DOL		J.R. NELSON, LLC		531 THIRD STREET ALBANY NY 12206	12/22/2022	12/22/2027
DOL	DOL		J.R. NELSON, LLC		531 THIRD STREET ALBANY NY 12206	10/25/2022	10/25/2027
DOL	DOL		J.R.N COMPANIES, LLC		531 THIRD STREET ALBANY NY 12206	12/12/2022	12/12/2027
DOL	DOL		J.R.N COMPANIES, LLC		531 THIRD STREET ALBANY NY 12206	10/25/2022	10/25/2027
DOL	DOL	****1147	J.R.N. CONSTRUCTION, LLC		531 THIRD ST ALBANY NY 12206	12/22/2022	12/22/2027
DOL	DOL	*****1147	J.R.N. CONSTRUCTION, LLC		531 THIRD ST ALBANY NY 12206	10/25/2022	10/25/2027
DOL	DOL		JAMES J. BAKER		7901 GEE ROAD CANASTOTA NY 13032	08/17/2021	08/17/2026
DOL	DOL		JASON P. RACE		3469 STATE RT. 69 PERISH NY 13131	09/29/2021	09/29/2026
DOL	DOL		JASON P. RACE		3469 STATE RT. 69 PERISH NY 13131	02/09/2022	02/09/2027
DOL	DOL		JASON P. RACE		3469 STATE RT. 69 PERISH NY 13131	11/15/2022	11/15/2027
DOL	DOL		JASON P. RACE		3469 STATE RT. 69 PERISH NY 13131	03/01/2022	03/01/2027
DOL	DOL	*****7993	JBS DIRT, INC.		7901 GEE ROAD CANASTOTA NY 13032	08/17/2021	08/17/2026
DOL	DOL	*****2435	JEFFEL D. JOHNSON	JMJ7 AND SON	5553 CAIRNSTRAIL CLAY NY 13041	11/21/2022	11/21/2027
DOL	DOL		JEFFEL JOHNSON ELITE CARPENTER REMODEL AND CONSTRUCTION		C2 EVERGREEN CIRCLE LIVERPOOL NY 13090	11/21/2022	11/21/2027
DOL	DOL	*****2435	JEFFREY M. JOHNSON	JMJ7 AND SON	5553 CAIRNS TRAIL CLAY NY 13041	11/21/2022	11/21/2027
DOL	NYC		JENNIFER GUERRERO		1936 HEMPSTEAD TURNPIKE EAST MEADOW NY 11554	11/29/2019	11/29/2024
DOL	DOL		JIM PLAUGHER		17613 SANTE FE LINE ROAD WAYNEFIELD OH 45896	07/16/2021	07/16/2026
DOL	DOL		JMJ7 & SON CONSTRUCTION, LLC		5553 CAIRNS TRAIL LIVERPOOL NY 13041	11/21/2022	11/21/2027
DOL	DOL		JMJ7 AND SONS CONTRACTORS		5553 CAIRNS TRAIL CLAY NY 13041	11/21/2022	11/21/2027
DOL	DOL		JMJ7 CONTRACTORS		7014 13TH AVENUE BROOKLYN NY 11228	11/21/2022	11/21/2027
DOL	DOL		JMJ7 CONTRACTORS AND SONS		5553 CAIRNS TRAIL CLAY NY 13041	11/21/2022	11/21/2027
DOL	DOL		JMJ7 CONTRACTORS, LLC		5553 CAIRNS TRAIL CLAY NY 13041	11/21/2022	11/21/2027
DOL	DOL		JOHN GOCEK		14B COMMERCIAL AVE ALBANY NY 12065	11/14/2019	11/14/2024
DOL	DOL		JOHN MARKOVIC		47 MANDON TERRACE HAWTHORN NJ 07506	03/29/2021	03/29/2026
DOL	DOL		JOHN WASE		8545 RT 9W ATHENS NY 12015	03/09/2021	03/09/2026
DOL	DOL		JON E DEYOUNG		261 MILL RD P.O BOX 296EAST AURORA NY 14052	05/29/2019	05/29/2024
DOL	DOL		JORGE RAMOS		8970 MIKE GARCIA DR MANASSAS VA 20109	07/16/2021	07/16/2026
DOL	DOL		JOSEPH K. SALERNO		1010 TILDEN AVE UTICA NY 13501	07/24/2023	07/24/2028
DOL		1			1010 TILDEN AVE	07/24/2023	07/24/2028
DOL	DOL		JOSEPH K. SALERNO II				
DOL	DOL	****5116	JOSEPH K. SALERNO II JP RACE PAINTING, INC. T/A RACE PAINTING		UTICA NY 13501 3469 STATE RT. 69 PERISH NY 13131	02/09/2022	02/09/2027
		*****5116	JP RACE PAINTING, INC. T/A		UTICA NY 13501 3469 STATE RT. 69	02/09/2022	02/09/2027 11/15/2027
DOL	DOL		JP RACE PAINTING, INC. T/A RACE PAINTING JP RACE PAINTING, INC. T/A RACE PAINTING JP RACE PAINTING, INC. T/A		UTICA NY 13501 3469 STATE RT. 69 PERISH NY 13131 3469 STATE RT. 69 PERISH NY 13131 3469 STATE RT. 69		
DOL	DOL	****5116	JP RACE PAINTING, INC. T/A RACE PAINTING JP RACE PAINTING, INC. T/A RACE PAINTING		UTICA NY 13501 3469 STATE RT. 69 PERISH NY 13131 3469 STATE RT. 69 PERISH NY 13131	11/15/2022	11/15/2027

DOL	DOL	****1147	JRN CONSTRUCTION, LLC	531 THIRD STREET ALBANY NY 12206	10/25/2022	10/25/2027
DOL	DOL	****1147	JRN CONSTRUCTION, LLC	531 THIRD STREET ALBANY NY 12206	12/22/2022	12/22/2027
DOL	DOL		JRN PAVING, LLC	531 THIRD STREET ALBANY NY 12206	10/25/2022	10/25/2027
DOL	DOL		JRN PAVING, LLC	531 THIRD STREET ALBANY NY 12206	12/22/2022	12/22/2027
DOL	DOL		JULIUS AND GITA BEHREND	5 EMES LANE MONSEY NY 10952	11/20/2002	11/20/3002
DOL	DOL		KARIN MANGIN	796 PHELPS ROAD FRANKLIN LAKES NJ 07417	12/01/2020	12/01/2025
DOL	DOL		KATE E. CONNOR	7088 INTERSTATE ISLAND RD SYRACUSE NY 13209	03/31/2021	03/31/2026
DOL	DOL	*****2959	KELC DEVELOPMENT, INC	7088 INTERSTATE ISLAND RD SYRACUSE NY 13209	03/31/2021	03/31/2026
DOL	DOL		KIMBERLY F. BAKER	7901 GEE ROAD CANASTOTA NY 13032	08/17/2021	08/17/2026
DOL	DOL		KMA GROUP II, INC.	29-10 38TH AVENUE LONG ISLAND CITY NY 11101	10/11/2023	10/11/2028
DOL	DOL	*****1833	KMA GROUP INC.	29-10 38TH AVENUE LONG ISLAND CITY NY 11101	10/11/2023	10/11/2028
DOL	DOL		KMA INSULATION, INC.	29-10 38TH AVENUE LONG ISLAND CITY NY 11101	10/11/2023	10/11/2028
DOL	NYC		KULWANT S. DEOL	9-11 40TH AVENUE LONG ISLAND CITY NY 11101	09/26/2023	09/26/2028
DOL	DA	*****8816	LAKE CONSTRUCTION AND DEVELOPMENT CORPORATION	150 KINGS STREET BROOKLYN NY 11231	08/19/1998	08/19/2998
DOL	DOL		LEROY E. NELSON JR	531 THIRD ST ALBANY NY 12206	10/25/2022	10/25/2027
DOL	DOL		LEROY E. NELSON JR	531 THIRD ST ALBANY NY 12206	12/22/2022	12/22/2027
DOL	AG	*****3291	LINTECH ELECTRIC, INC.	3006 TILDEN AVE BROOKLYN NY 11226	02/16/2022	02/16/2027
DOL	DOL		LOUIS A. CALICCHIA	1223 PARK ST. PEEKSKILL NY 10566	05/17/2021	05/17/2026
DOL	NYC		LUBOMIR PETER SVOBODA	27 HOUSMAN AVE STATEN ISLAND NY 10303	12/26/2019	12/26/2024
DOL	NYC		M & L STEEL & ORNAMENTAL IRON CORP.	27 HOUSMAN AVE STATEN ISLAND NY 10303	12/26/2019	12/26/2024
DOL	DOL	*****2196	MAINSTREAM SPECIALTIES, INC.	11 OLD TOWN RD SELKIRK NY 12158	02/02/2021	02/02/2026
DOL	DA		MANUEL P TOBIO	150 KINGS STREET BROOKLYN NY 14444	08/19/1998	08/19/2998
DOL	DA		MANUEL TOBIO	150 KINGS STREET BROOKLYN NY 11231	08/19/1998	08/19/2998
DOL	NYC		MAREK FABIJANOWSKI	50 MAIN ST WHITE PLAINS NY 10606	01/04/2019	01/04/2024
DOL	NYC		MARIA NUBILE	84-22 GRAND AVENUE ELMHURST NY 11373	03/10/2020	03/10/2025
DOL	DOL		MATTHEW P. KILGORE	4156 WILSON ROAD EAST TABERG NY 13471	03/26/2019	03/26/2024
DOL	DOL	*****4829	MILESTONE ENVIRONMENTAL CORPORATION	704 GINESI DRIVE SUITE 29MORGANVILLE NJ 07751	04/10/2019	04/10/2024
DOL	NYC	*****9926	MILLENNIUM FIRE PROTECTION, LLC	325 W. 38TH STREET SUITE 204NEW YORK NY 10018	11/14/2019	11/14/2024
DOL	NYC	*****0627	MILLENNIUM FIRE SERVICES, LLC	14 NEW DROP LNE 2ND FLOORSTATEN ISLAND NY 10306	11/14/2019	11/14/2024
DOL	DOL	*****1320	MJC MASON CONTRACTING, INC.	42 FOWLER AVENUE CORTLAND MANOR NY 10567	10/25/2022	10/25/2027
DOL	DOL	*****1320	MJC MASON CONTRACTING, INC.	42 FOWLER AVENUE CORTLAND MANOR NY 10567	01/24/2023	01/24/2028
DOL	NYC		MUHAMMED A. HASHEM	524 MCDONALD AVENUE BROOKLYN NY 11218	09/17/2020	09/17/2025
DOL	NYC		NAMOW, INC.	84-22 GRAND AVENUE ELMHURST NY 11373	03/10/2020	03/10/2025
DOL	DOL	****7790	NATIONAL BUILDING & RESTORATION CORP	1010 TILDEN AVE UTICA NY 13501	07/24/2023	07/24/2028
DOL	DOL	****1797	NATIONAL CONSTRUCTION SERVICES, INC	1010 TILDEN AVE UTICA NY 13501	07/24/2023	07/24/2028

## Page 5 of 7

DOL	NYC		NAVIT SINGH		402 JERICHO TURNPIKE NEW HYDE PARK NY 11040	08/10/2022	08/10/2027
DOL	DA		NICHOLAS T. ANALITIS		505 MANHATTAN AVE WEST BABYLON NY 11704	10/05/2023	10/05/2028
DOL	DOL		NICHOLE E. FRASER A/K/A NICHOLE RACE		3469 STATE RT. 69 PERISH NY 13131	03/01/2022	03/01/2027
DOL	DOL		NICHOLE E. FRASER A/K/A NICHOLE RACE		3469 STATE RT. 69 PERISH NY 13131	11/15/2022	11/15/2027
DOL	DOL		NICHOLE E. FRASER A/K/A NICHOLE RACE		3469 STATE RT. 69 PERISH NY 13131	09/29/2021	09/29/2026
DOL	DOL		NICHOLE E. FRASER A/K/A NICHOLE RACE		3469 STATE RT. 69 PERISH NY 13131	02/09/2022	02/09/2027
DOL	DOL	****7429	NICOLAE I. BARBIR	BESTUCCO CONSTRUCTI ON, INC.	444 SCHANTZ ROAD ALLENTOWN PA 18104	09/17/2020	09/17/2025
DOL	NYC	****5643	NYC LINE CONTRACTORS, INC.		402 JERICHO TURNPIKE NEW HYDE PARK NY 11040	08/10/2022	08/10/2027
DOL	DOL		PAULINE CHAHALES		935 S LAKE BLVD MAHOPAC NY 10541	03/02/2021	03/02/2026
DOL	DOL		PETER STEVENS		11 OLD TOWN ROAD SELKIRK NY 12158	02/02/2021	02/02/2026
DOL	DOL		PETER STEVENS		8269 21ST ST BELLEROSE NY 11426	12/22/2022	12/22/2027
DOL	DOL	*****0466	PRECISION BUILT FENCES, INC.		1617 MAIN ST PEEKSKILL NY 10566	03/03/2020	03/03/2025
DOL	NYC		RASHEL CONSTRUCTION CORP		524 MCDONALD AVENUE BROOKLYN NY 11218	09/17/2020	09/17/2025
DOL	DOL	****1068	RATH MECHANICAL CONTRACTORS, INC.		24 ELDOR AVENUE NEW CITY NY 10956	02/03/2020	02/03/2025
DOL	DOL	****2633	RAW POWER ELECTRIC CORP.		3 PARK CIRCLE MIDDLETOWN NY 10940	07/11/2022	07/11/2027
DOL	DA	****7559	REGAL CONTRACTING INC.		24 WOODBINE AVE NORTHPORT NY 11768	10/01/2020	10/01/2025
DOL	DOL		RICHARD REGGIO		1617 MAIN ST PEEKSKILL NY 10566	03/03/2020	03/03/2025
DOL	DOL		ROBBYE BISSESAR		89-51 SPRINGFIELD BLVD QUEENS VILLAGE NY 11427	01/11/2003	01/11/3003
DOL	DOL		ROBERT A. VALERINO		3841 LANYARD COURT NEW PORT RICHEY FL 34652	07/09/2019	07/09/2024
DOL	DOL		ROBERT BRUNO		5 MORNINGSIDE DRIVE AUBURN NY 13021	05/28/2019	05/28/2024
DOL	DOL		ROMEO WARREN		161 ROBYN RD MONROE NY 10950	07/11/2022	07/11/2027
DOL	DOL		RONALD MESSEN		14B COMMERCIAL AVE ALBANY NY 12065	11/14/2019	11/14/2024
DOL	DOL	****7172	RZ & AL INC.		198 RIDGE AVENUE VALLEY STREAM NY 11581	06/06/2022	06/06/2027
DOL	DOL	*****1365	S & L PAINTING, INC.		11 MOUNTAIN ROAD P.O BOX 408MONROE NY 10950	03/20/2019	03/20/2024
DOL	DOL		SAL FRESINA MASONRY CONTRACTORS, INC.		1935 TEALL AVENUE SYRACUSE NY 13206	07/16/2021	07/16/2026
DOL	DOL		SAL MASONRY CONTRACTORS, INC.		(SEE COMMENTS) SYRACUSE NY 13202	07/16/2021	07/16/2026
DOL	DOL	*****9874	SALFREE ENTERPRISES INC		P.O BOX 14 2821 GARDNER RDPOMPEI NY 13138	07/16/2021	07/16/2026
DOL	DOL		SALVATORE A FRESINA A/K/A SAM FRESINA		107 FACTORY AVE P.O BOX 11070SYRACUSE NY 13218	07/16/2021	07/16/2026
DOL	DOL		SAM FRESINA		107 FACTORY AVE P.O BOX 11070SYRACUSE NY 13218	07/16/2021	07/16/2026
DOL	NYC	*****0349	SAM WATERPROOFING INC		168-42 88TH AVENUE APT.1 AJAMAICA NY 11432	11/20/2019	11/20/2024
DOL	DA	****0476	SAMCO ELECTRIC CORP.		3735 9TH ST LONG ISLAND CITY NY 11101	01/05/2023	01/05/2028
DOL	NYC	****1130	SCANA CONSTRUCTION CORP.		863 WASHINGTON STREET FRANKLIN SQUARE NY 11010	03/10/2020	03/10/2025
DOL	DOL	*****2045	SCOTT DUFFIE	DUFFIE'S ELECTRIC, INC.	P.O BOX 111 CORNWALL NY 12518	03/03/2020	03/03/2025
DOL	DOL		SCOTT DUFFIE		P.O BOX 111 CORNWALL NY 12518	03/03/2020	03/03/2025
DOL	NYC	*****6597	SHAIRA CONSTRUCTION CORP.		421 HUDSON STREET SUITE C5NEW YORK NY 10014	02/20/2019	02/20/2024

### NYSDOL Bureau of Public Work Debarment List 12/22/2023

DOL	DOL		SHULEM LOWINGER		11 MOUNTAIN ROAD 28 VAN BUREN DRMONROE NY 10950	03/20/2019	03/20/2024
DOL	DA		SILVANO TRAVALJA		3735 9TH ST LONG ISLAND CITY NY 11101	01/05/2023	01/05/2028
DOL	DOL	****0440	SOLAR GUYS INC.		8970 MIKE GARCIA DR MANASSAS VA 20109	07/16/2021	07/16/2026
DOL	NYC		SOMATIE RAMSUNAHAI		115-46 132ND ST SOUTH OZONE PARK NY 11420	09/17/2020	09/17/2025
DOL	DOL	****2221	SOUTH BUFFALO ELECTRIC, INC.		1250 BROADWAY ST BUFFALO NY 14212	02/03/2020	02/03/2025
DOL	NYC	*****3661	SPANIER BUILDING MAINTENANCE CORP		200 OAK DRIVE SYOSSET NY 11791	03/14/2022	03/14/2027
DOL	DOL		STANADOS KALOGELAS		485 RAFT AVENUE HOLBROOK NY 11741	10/19/2021	10/19/2026
DOL	DOL	****3496	STAR INTERNATIONAL INC		89-51 SPRINGFIELD BLVD QUEENS VILLAGE NY 11427	08/11/2003	08/11/3003
DOL	DOL	****6844	STEAM PLANT AND CHX SYSTEMS INC.		14B COMMERCIAL AVENUE ALBANY NY 12065	11/14/2019	11/14/2024
DOL	DOL	****9933	STEED GENERAL CONTRACTORS, INC.		1445 COMMERCE AVE BRONX NY 10461	05/30/2019	05/30/2024
DOL	DOL	*****9528	STEEL-IT, LLC.		17613 SANTE FE LINE ROAD WAYNESFIELD OH 45896	07/16/2021	07/16/2026
DOL	DOL		STEFANOS PAPASTEFANOU, JR. A/K/A STEVE PAPASTEFANOU, JR.		256 WEST SADDLE RIVER RD UPPER SADDLE RIVER NJ 07458	05/30/2019	05/30/2024
DOL	DOL	****3800	SUBURBAN RESTORATION CO. INC.		5-10 BANTA PLACE FAIR LAWN PLACE NJ 07410	03/29/2021	03/29/2026
DOL	DOL	*****1060	SUNN ENTERPRISES GROUP, LLC		370 W. PLEASANTVIEW AVE SUITE 2.329HACKENSACK NJ 07601	02/11/2019	02/11/2024
DOL	DOL	*****9150	SURGE INC.		8269 21ST STREET BELLEROSE NY 11426	12/22/2022	12/22/2027
DOL	DOL		SYED RAZA		198 RIDGE AVENUE NY 11581	06/06/2022	06/06/2027
DOL	DOL	*****8209	SYRACUSE SCALES, INC.		158 SOLAR ST SYRACUSE NY 13204	01/07/2019	01/07/2024
DOL	DOL		TERRY THOMPSON		11371 RIDGE RD WOLCOTT NY 14590	02/03/2020	02/03/2025
DOL	DOL	*****9733	TERSAL CONSTRUCTION SERVICES INC		107 FACTORY AVE P.O BOX 11070SYRACUSE NY 13208	07/16/2021	07/16/2026
DOL	DOL		TERSAL CONTRACTORS, INC.		221 GARDNER RD P.O BOX 14POMPEI NY 13138	07/16/2021	07/16/2026
DOL	DOL		TERSAL DEVELOPMENT CORP.		1935 TEALL AVENUE SYRACUSE NY 13206	07/16/2021	07/16/2026
DOL	DOL		TEST		P.O BOX 123 ALBANY NY 12204	05/20/2020	05/20/2025
DOL	DOL	****6789	TEST1000		P.O BOX 123 ALBANY NY 12044	03/01/2021	03/01/2026
DOL	DOL	****5766	THE COKER CORPORATION	COKER CORPORATIO N	2610 SOUTH SALINA ST SUITE 14SYRACUSE NY 13205	09/17/2020	09/17/2025
DOL	DOL		TIMOTHY PERCY		29807 ANDREWS ROAD BLACK RIVER NY 13612	10/17/2023	10/17/2028
DOL	DA	****1050	TRI STATE CONSTRUCTION OF NY CORP.		50-39 175TH PLACE FRESH MEADOWS NY 11365	03/28/2022	03/28/2027
DOL	DA	*****4106	TRIPLE H CONCRETE CORP		2375 RAYNOR STREET RONKONKOMA NY 11779	08/04/2021	08/04/2026
DOL	DOL	*****8210	UPSTATE CONCRETE & MASONRY CONTRACTING CO INC		449 WEST MOMBSHA ROAD MONROE NY 10950	06/06/2022	06/06/2027
DOL	DOL	****6418	VALHALLA CONSTRUCTION, LLC.		796 PHLEPS ROAD FRANKLIN LAKES NJ 07417	12/01/2020	12/01/2025
DOL	NYC	*****2426	VICKRAM MANGRU	VICK CONSTRUCTI ON	21 DAREWOOD LANE VALLEY STREAM NY 11581	09/17/2020	09/17/2025
DOL	NYC		VICKRAM MANGRU		21 DAREWOOD LANE VALLEY STREAM NY 11581	09/17/2020	09/17/2025
DOL	DOL		VICTOR ALICANTI		42-32 235TH ST DOUGLASTON NY 11363	01/14/2019	01/14/2024
DOL	DOL		VIKTORIA RATH		24 ELDOR AVENUE NEW CITY NY 10956	02/03/2020	02/03/2025
DOL	NYC	*****3673	WALTERS AND WALTERS, INC.		465 EAST AND THIRD ST MT. VERNON NY 10550	09/09/2019	09/09/2024

DOL	DOL	*****3296	WESTERN NEW YORK CONTRACTORS, INC.		3841 LAYNARD COURT NEW PORT RICHEY FL 34652	07/09/2019	07/09/2024
DOL	DOL	*****8266	WILLIAM CHRIS MCCLENDON	MCCLENDON ASPHALT PAVING	1646 FALLS STREET NIAGARA FALLS NY 14303	05/01/2023	05/01/2028
DOL	DOL		WILLIAM CHRIS MCCLENDON		1646 FALLS STREET NIAGARA FALLS NY 14303	05/01/2023	05/01/2028
DOL	DOL		WILLIAM G. PROERFRIEDT		85 SPRUCEWOOD ROAD WEST BABYLON NY 11704	01/19/2021	01/19/2026
DOL	DOL	*****5924	WILLIAM G. PROPHY, LLC	WGP CONTRACTIN G, INC.	54 PENTAQUIT AVE BAYSHORE NY 11706	01/19/2021	01/19/2026
DOL	DOL		XENOFON EFTHIMIADIS		29-10 38TH AVENUE LONG ISLAND CITY NY 11101	10/11/2023	10/11/2028



Design and Construction Division of Construction, 35th Floor, Corning Tower The Governor Nelson A. Rockefeller Empire State Plaza Albany, New York 12242 Phone: (518) 474-0331 FAX: (518) 474-8201

#### SCHEDULE OF SUBMITTALS

#### PROJECT NO.: 47430-H

#### FACILITY: BUILDING 144 COOK CHILL PRODUCTION CENTER

#### CONTRACTOR:

#### PROJECT MANAGER: FIKRET BESIC

#### DESIGN CONSULTANT: FRIEDMAN FISHER ASSOCIATES

#### **ENGINEER-IN-CHARGE:**

#### LEGEND

PACK: SUBMITTAL PACKAGE

SD: SHOP DRAWINGS

PD: PRODUCT DATA

SAM: SAMPLES

QCS: QUALITY CONTROL SUBMITTALS

LEED: LEED SUBMITTALS

**CCS:** CONTRACT CLOSEOUT SUBMITTALS

#### SUBMITTAL REVIEW RESPONSIBILITY:

F: OGS FIELD OFFICE F/O: OGS FIELD OFFICE / OFFICE (ALBANY) D: CONSULTANT / DESIGNER S: OGS SCHEDULING DEPARTMENT RSM: Regional Safety Manager

#### **INSTRUCTIONS TO THE CONTRACTOR**

 Refer to Section 013300 Submittals of the Project Manual for general requirements regarding submittals and to Section 017716 -CONTRACT CLOSEOUT for project closeout submittals.
 Refer to Sections of the specifications indicated bars is for details of the specification bars indicated bars is for details of the specifications in the s

Refer to Sections of the specifications indicated herein for details of the requirements for each submittal listed.

3. Indicate in the rows (spaces) following each item:

**a.** Critical submittals and long lead items (mark with an 'X'). Some critical submittals may already be identified by the design team. Confirm that these are critical submittals.

**b.** The date the item will be submitted, and date approval is required (allow at least 3 weeks), and the date delivery of the material or equipment is necessary for completion of the work in accordance with the Progress Schedule. The date entered for the submittal is the last date a substitution will be considered. Proposed substitutions must be made prior to the date entered if more than one substitution is to be submitted for approval. Spaces which contain N/A do not require dates.

4. An example of a Submittal Transmittal (BDC-42) can be located at: http://www.ogs.ny.gov/BU/DC/forms/ContractorConstForms.asp
5. Submit Contract Closeout Submittals (CCS) prior to final inspection.

#### **INSTRUCTIONS TO THE CONSULTANT / DESIGNER**

**1.** Cut and paste required information from each Division (Div.X) tab and place in the S.O.S. tab.

Delete Division (Div.X) tabs after the S.O.S. tab has been in-filled.
 Indicate F, F/O or D in column E. Items in Div.1 have defaults that can be modified as necessary.

**4.** Indicate items that are critical submittals in column F. **Note:** 

The following list of submittals is furnished for your convenience in scheduling submittals. The list is not warranted to be complete and does not take precedence over the contract documents. Enter additional submittals, as required and modify this schedule to the specific project. This S.O.S. will be used to populate the submittals website log.



			SCHEDULE OF SUBMIT	TALS	;			
			PROJECT NO.: 47430-H					
		SUBM	TTALS FOR APPROVAL	Send to:	Critical Submittals	Contractor's Projected Dates Allow at least 4 weeks for Approva (allows time for any resubmission)		
Spec Section	Sub Section	Туре	Description	F F/O D S	Mark "X" for all that apply	Projected Transmittal Date:	Projected Approval Date:	Projected Delivery Date:
007213			GENERAL CONDITIONS					
007213		PD PD	ARTICLE 6: Designate in writing competent supervision and/or management representatives as required - include contact number in case of an emergency after work hours, including weekends and holidays (see 011000 Summary of Work) ARTICLE 8: Permits and licenses	F				
007213		PD						
011100			SAFETY					
		000		RSM				
011100			Site Specific Safety Plan Employee Safety Orientation Training and Certificates	F				
011100		2000 0000 2000	Emergency Action and Evacuation Plan	F				
011100		QCS		Г				
013113			PROJECT PLANNING AND SCHEDULING					
013113			Baseline Agreement	F				
013113				E.				
013300			SUBMITTALS					
013300			Schedule of Submittals (This form completed and					
013300		PD	editted)	F	Х			
013300		QCS	Proof of Payment	F	Х			
013300		QCS	Submittal Coordinator Qualifications	F/O	Х			
017716			CONTRACT CLOSEOUT					
017716		CCS	Project Record Documents	F				
017716		CCS	Operation and maintenance, 2 copies	F				
017716		ccs	Warranties	F				
017716		CCS	Spare Parts and Maintenance Materials	F				
028213 028213		PD	ASBESTOS ABATEMENT Disposal Bags	D				
028213		PD	Fireproofing	D				
028213		PD	Glove Bags	D				
028213		PD	Negative Air Pressure Units	D				
028213		PD	HEPA Filters (Negative Air Pressure Units)	D				
028213		PD	HEPA Filters (Respirators)	D				
028213		PD	HEPA Filters (Vacuum Cleaners)	D				
028213 028213		PD PD	Respirators Vacuum Cleaners	D				
028213			Asbestos Site Specific Variance Submittals; if a site specific variance is sought submit the following: One copy of the completed DOSH-751 and DOSH-465 forms	D				
028213			Asbestos Site Specific Variance Submittals; if a site specific variance is sought submit the following: One copy of the New York State Department of Labor site specific variance decision.	D				

# SCHEDULE OF SUBMITTALS

			PROJECT NO.: 47430-H					
		SUBMI	TTALS FOR APPROVAL	Send to:	Critical Submittals	Allow at lea	ctor's Project ast 4 weeks fo ne for any resu	r Approval
				F	Mark "X"			
	-			F/O	for all	Projected	Projected	Projected
Spec	Sub	_		D	that apply	Transmittal	Approval	Delivery
Section	Section	Туре	Description	S		Date:	Date:	Date:
028213			Notification Compliance Data	D				
028213		QCS	Work Plan	D				
028213			Abatement Contractor's Qualifications Data	D				
028213			Abatement Worker's Qualifications Data	D				
028213 028213		QCS QCS	Testing Lab Qualifications Data Waste Transporter Permit	D D				
028213		QCS		D	-			
028213		QUS						
028213		QCS	Waste Shipment Records and Disposal Site Receipts	D				
028213		QCS	Daily Log	D				
028213			Certificates	D				
028213		2002/02/02 2002	Air Monitoring Data	D				
028213		CCS	Operation and Maintenance Data	F				
VEUEIJ		003	operation and Maintenance Data					
028304			HANDLING OF LEAD CONTAINING MATERIALS					
028304		PD	Respirators	D				
028304		PD	HEPA Filters (Respirators)					
028304		PD	HEPA Filters (Vacuum Cleaners)	D				
028304		PD	Vacuum Cleaners	D				
028304		PD	Disposal Bags	D				
028304		QCS	Work Plan	D				
028304		QCS	Lead Handling Contractor's Qualifications Data	D				
028304			Lad Handling Worker's Qualifications Data	D				
028304		QCS	Testing Lab Qualifications Data	D				
028304		QCS	Waste Transporter Permit	D				
028304		QCS	Landfill Permit	D				
028304			Disposal Site Receipts	D				
028304		QCS	Test Data	D				
028304		QCS	Certificates	D				
078400			FIRESTOPPING					
0/0400			Submit the following items specified below the same					
			time as a package: Product Data, Samples, Quality					
078400		PACK	Control Submittals and Firestop Schedule	D				
			Firestopping Device and Material	D				
078400								-
078400		PD	Firestopping Schedule	D				
			Through-Penetration Firestop Devices, Forming					
078400		PD	Materials, And Fill, Void or Cavity Materials	D				
078400		PD	Accessories	D				
078400		PD	Identification Labels	D				
078400		SAM	Each Product requested	D				
078400		QCS	Design Data	F				
078400		QCS	Installer's Qualifications Data	F				
078400		QCS	Company Field Advisor Data	F				
099103			MECHANICAL PAINTING					
099103		PD	Painting Schedule - Exterior Substrates	D				
099103		PD	Painting Schedule - Interior Substrates	D				
			5					
099103		PD	Type IAL-3: Interior Acrylic Latex, Semigloss Enamel	D				
			Type EIC: Elastomeric Insulation Coating, Acrylic					
099103		PD	Latex	D				
099103			Colors	D				
			Finish Paint Type Samples: Two finish paint samples					
			applied over recommended primers for each substrate					
099103		SAM	to be painted	D				

# SCHEDULE OF SUBMITTALS

## PROJECT NO.: 47430-H

			PROJECT NO.: 47430-H					
		SUBMI	TTALS FOR APPROVAL	Send to:	Critical Submittals	Allow at lea	ctor's Projec ast 4 weeks fo ne for any resi	or Approval
				F	Mark "X"			
Spec	Sub			F/O D	for all	Projected	Projected	Projected
Section	Section	Туре	Description	s	that apply	Transmittal Date:	Approval Date:	Delivery Date:
		.,,,,,,	Test Reports: Furnish certified test results from an	-				
099103		QCS	independent testing laboratory	D				
099103		QCS	Certificates of Quality Assurance Article	D				
099103		CCS	Extra Materials: Paint Types IAL: Two gallons	F				
			Extra Materials: Color Coded Paints: One gallon,	_				
099103		CCS	each type.	F				
000402		000	Extra Materials: Other Paint Types: One gallon, each	F				
099103		CCS	type	1				
020500			METERS AND RECORDERS				_	
230520		60		D				
230520		SD	All meters and recorders, and all appurtenance data.					
230520		PD	Magnetic Flow Meter					
000								
230523			VALVES - Broadscope	5				
230523		PD	Valve Schedule					
230523		PD	Gate Valves - Type A					
230523		PD	Gate Valves - Type C	D				
230523		PD	Gate Valves - Type D	D				
230523		PD	Globe and Angle Valves - Type J	D				
230523		PD	Globe and Angle Valves - Type K	D				
230523		PD	Globe and Angle Valves - Type O	D				
230523		PD	Check Valve - Type S	D				
230523		PD	Check Valve - Type U	D				
230523		PD	Check Valve - Type V	D				
230523		PD	Butterfly Valves Type BF	D				
230523		PD	Combination Balancing and Shut-off Valves	D				
230523		PD	Safety and Relief Valves	D				
230523		PD	Needle Stop Valves	D				
230523		PD	Gage Cocks	D				
230523		PD	Ball Valves	D				
230529			PIPE HANGERS AND SUPPORTS					
			Details of trapeze hangers and upper hanger					
230529		SD	attachments for piping 4 inches in diameter and over.					
230529		SD	Details of pipe anchors. Combination clevis hanger, pipe insulation shield and	D				
230529		PD	vapor barrier	D				
230529		PD	Pipe Insulation Shields	D				
230529		PD	Pipe Covering Protection Saddles	D				
230529		PD	Pipe Hangers	D				
230529		PD	Adjustable Floor Rests and Base Flanges	D				
230529		PD	Hanger Rods	D				
			Sleeve Anchors					
230529		PD	Wedge Anchors					
230529		PD	-					
230529		PD	Self-Drilling Anchors	D				ļ
230529		PD	Non-Drilling Anchors	D				ļ
230529		PD	Stud Anchors	D				
230529		PD	Beam Clamps	D				
230529		PD	Vibration Isolation for Piping	D				
230529		PD	Shop painting and plating	D				

#### SCHEDULE OF SUBMITTALS **PROJECT NO.: 47430-H** Contractor's Projected Dates Send Critical SUBMITTALS FOR APPROVAL Allow at least 4 weeks for Approval Submittals to: (allows time for any resubmission) F Mark "X" F/O for all Projected Projected Projected Spec Sub D that apply Transmittal Approval Delivery Section Section Туре Description S Date: Date: Date: Channel Support System D 230529 PD CONCRETE PADS FOR EQUIPMENT 230549 Submit product data for design mix and materials for concrete specified at the same time as a package D 230549 PACK 230549 EPD Environmental Product Declaration D D 230549 SAM Fabric Reinforcement D Bar Supports 230549 SAM 230552 FLEXIBLE VIBRATION ELIMINATORS Metal Flexible Vibration Eliminators - Stainless Steel Units 230552 PD D PIPE AND VALVE IDENTIFICATION 230553 230553 PD Snap-on Marker D PD Strap-on Marker D 230553 D PD Stick-On Marker 230553 Pipe Marker Legend and Color Field Sizes D 230553 PD 230553 PD **Banding Tapes** D 230553 Pipe Size Labels D PD 230553 Pipe Service Identification Tags D PD D Valve Service Identification Tags 230553 PD PD Valve Service Identification Chart Frames D 230553 **CLEANING AND TESTING** 230593 Test Reports - Propylene Glycol System Test D 230593 QCS Test Reports - Submit data for each system tested, QCS and/or disinfected D 230593 **BALANCING OF SYSTEMS** 230594 Testing, Adjustment and Balancing Reports: Hydronic D 230594 QCS Systems Testing, Adjustment and Balancing Reports: Final testing and balancing results D 230594 QCS 230719 INSULATION Material Schedule D 230719 PD Fibrous Glass (Mineral Fiber) Insulation - Preformed Pipe Insulation D 230719 PD Fibrous Glass (Mineral Fiber) Insulation - Premolded Fitting Insulation D 230719 PD Fibrous Glass (Mineral Fiber) Insulation - Insulation 230719 PD Inserts for PVC Fitting Jackets D Fibrous Glass (Mineral Fiber) Insulation - Block or D 230719 PD **Board Insulation** Flexible Elastomeric Foam Insulation D 230719 PD High Density Jacketed Insulation Inserts for Hangers D 230719 PD and Supports 230719 D PD Cements 230719 PD Laminated Vapor Barrier Jackets for Piping D D 230719 PD Canvas Jackets

# SCHEDULE OF SUBMITTALS

## 

PROJECT NO.: 47430-H											
	SUBMITTALS FOR APPROVAL			SUBMITTALS FOR APPROVAL			Send to:	Critical Submittals	Allow at lea	<b>ctor's Projec</b> ast 4 weeks fo ne for any resi	or Approval
				F	Mark "X"						
Conce	Cub			F/O	for all	Projected	Projected	Projected			
Spec Section	Sub Section	Туре	Description	D S	that apply	Transmittal Date:	Approval Date:	Delivery Date:			
230719	Ocotion	PD	Premolded PVC Piping and Fitting Jackets	D		Date.	Date.	Duic.			
2307 19		PD	Metal Jacketing	D							
2307 19		PD	Lagging Adhesive (Canvas Jackets)	D							
		PD	Vapor Seal Adhesive (Fibrous Glass Insulation)	D							
230719		PD	Vapor Barrier Mastic/Joint Sealer (Fibrous Glass								
2307 19		PD	Insulation)	D							
230719		PD	Adhesive (Flexible Elastomeric Foam)	D							
230719		PD	Adhesive (Reinforcing Membrane)	D							
230719		PD	Mastic (Reinforcing Membrane)	D							
230719		PD	Sealant (Metal Pipe Jacket)	D							
2307 19		PD	Insulation Fasteners for Ductwork and Equipment	D							
			Pressure Sensitive Tape for Sealing Laminated	_							
2307 19		PD	Jackets	D							
230719		PD	Wire, Bands, and Wire Mesh	D							
230719		PD	Insulated Box Covers for Pumps	D							
230719		QCS	Installers Qualification Data	D							
			MODIFICATIONS TO DIRECT DIGITAL BUILDING								
230924											
230924		PD	Preliminary Submittal: Existing system test report.	D							
			Submit the shop drawings, product data, and quality								
320034		PACK	control submittals specified below at the same time as a package	D							
230924		FACK	Composite wiring and/or schematic diagrams of the								
230924		SD	modifications as proposed to be installed	D							
230924		PD	Bill of Materials	D							
230924		PD	Detailed description of system operation	D							
230924		PD	Electronic Analog Sensors:	D							
230924		PD	Binary Sensors	D							
230924		PD	Pneumatic Sensor/Controllers	D							
230924			Field Panels and Points	D							
230924		PD	Electric Power Control Devices	D							
230924		PD	Valves and Actuators	D							
230924		PD	Misc. Electric/Electronic and Mechanical Devices	D							
		PD	Digital Energy Meter	D							
230924			Markers and Nameplates	D							
230924		PD									
230924		PD	Wiring	D							
230924		PD	Accessories	D							
230924		QCS	Company Field Advisor Data	D							
230924		ccs	System Acceptance Test Report Certificate: Affidavit certifying the system meets the	F							
230924		ccs	contract requirements and is operating properly	F							
230924		CCS	Operation and Maintenance Data - 2 copies	F							
200027		000									
232000			HVAC PIPING								
232000		PD	Material Schedule	D							
232000		PD	Steel Pipe and Fittings	D							
232000		PD	Copper and Brass Pipe, Tubing and Fittings	D							
232000		PD	Joining and Sealant Materials	D	-						
232000		PD	Dielectric Connectors	D							
232000											

#### SCHEDULE OF SUBMITTALS **PROJECT NO.: 47430-H** Contractor's Projected Dates Send Critical SUBMITTALS FOR APPROVAL Allow at least 4 weeks for Approval Submittals to: (allows time for any resubmission) F Mark "X" F/O for all Projected Projected Projected Spec Sub D that apply Transmittal Approval Delivery Section Section Туре Description S Date: Date: Date: Welder Qualification Data D 232000 QCS Welding Procedures 232000 QCS D Welders' Certificates D 232000 QCS Welding Procedure Submittals D 232000 QCS Copy of Final Hydrostatic Testing Record Log F 232000 CCS STRAINERS 232001 232001 PD Stainer - Y D 232002 **BACKFLOW PREVENTERS** 232002 PD Backflow Preventer - Type A D D Test Kit A 232002 PD 232002 ccs Special Tools: Tet Kit A F THERMOMETERS AND GAUGES 232003 232003 PD Thermometers for Measuring Liquid Temperature D 232003 Pressure and Compound Gauges D PD D 232003 PD Impulse Dampers AIR GAP FITTINGS 232004 232004 PD Air Gap Fitting D HYDRONIC SPECIALTIES 232006 232006 PD Expansion Tank D Air Vents D 232006 PD 232006 PD Make-Up Glycol System D F 232006 CCS Operation and Maintenance Data - 2 copies COMBINATION BALANCING VALVE AND FLOW METER 232113 Circuit Setter PD D 232113 232113 PD Portable readout meter D PUMPS 232123 232123 Pump Schedule D PD Circulating Waterpumps - Base Mounted Double 232123 PD Suction Pump D D Lubrication Charts 232123 PD Performance curves for each pump, showing gpm, brake HP and efficiency from free delivery to shut-off D QCS 232123 Certificates: Affidavit required under QUALITY ASSURANCE Article. D QCS 232123 232123 QCS Company Field Advisor Data D Operation, Maintenance Data, and Parts Lists: 2 ccs copies F 232123 Spare Parts: Deliver one spare set of mechanical seals for each size and type of pump equipped with F 232123 CCS mechanical seals WATER TREATMENT - AIR CONDITIONING SYSTEMS 232514

# SCHEDULE OF SUBMITTALS

PROJECT NO.: 47430-H										
SUBMITTALS FOR APPROVAL					Send Critical to: Submittals		Contractor's Projected Dates Allow at least 4 weeks for Approval (allows time for any resubmission)			
				F	M 1 112/1					
				F/O	Mark "X" for all	Projected	Projected	Projected		
Spec	Sub	L		D	that apply	Transmittal	Approval	Delivery		
Section	Section	Туре	Description	S		Date:	Date:	Date:		
232514		PD	Performance Charts	D						
232514		PD	Schematic Drawings	D				-		
000544			Equipment for Treatment of Propylene Glycol / Water	D						
232514		PD	System							
232514		PD	Test Equipment	D						
232514		PD	Chemicals	D						
232514		QCS	Test Reports	D						
232514		CCS	Operation and Maintenance Data	F						
232514		CCS	Warranty	F						
			Extra materials: One year supply of water treatment							
			chemicals for each system installed under this	_						
232514		CCS	contract.	E						
233113			METAL DUCTWORK							
			Layouts for areas in which it may be necessary to deviate substantially from layout shown on the							
000440		<b>e</b> D	Drawings	D						
233113		SD	Method of attachment of duct hangers to building							
233113		SD	construction	D						
200110		05	Coordinate shop drawings with related contracts prior	_						
233113		SD	to submission	D						
233113		PD	Sheet Metal	D						
233113		PD	Duct Hangers	D						
		<u> </u>	Miscellaneous Fasteners and Upper Hanger							
233113		PD	Attachments	D						
233113		PD	Gage	D						
233113		PD	Type of Joints	D						
233113		PD	Sealing Material	D						
233113		PD	Reinforcement for each duct size range	D						
233113		EPD	Environmental Product Declaration	D						
PRESS OF AN AND AND		22 223 54								
233113		QCS	Company Field Advisor Data	D						
236416			AIR-COOLED, ROTARY SCREW WATER CHILLER							
			Product Data: Manufacturer's catalog sheets, standard diagrams, ARI certification performance							
			charts, rated capacities, standard schematic drawings,							
			specifications and installation instructions for chiller							
236416		PD	package and accessories.	D						
			Submit job specific dimensional plan and elevation							
			view drawings, weights and loadings, required							
			clearances, location and size of all field connections,							
			electrical requirements and wiring diagrams. Submit							
			manufacturer's installation instructions. Submit noise data at the conditions listed on the Drawings							
236416		PD	add at the conditions listed on the Drawings	D						
200410			Certificates: Affidavit required under Quality							
236416		QCS	Assurance Article.	D						
236416		QCS	Company Field Advisor Data							
236416		CCS	Operation and Maintenance Data - 2 copies	F						
			Test Reports: Chiller Package Acceptance Test							
236416		ccs	Report	F						
		1	Maintenance Service: A fully equipped authorized							
10000 c			service organization and warranty certificates							
236416		CCS	including warranty extension.	F						

## SCHEDULE OF SUBMITTALS

#### 47420 11

			PROJECT NO.: 47430-H						
SUBMITTALS FOR APPROVAL					to: Submittals Allow at least 4 w			Projected Dates weeks for Approval any resubmission)	
Spec Section	Sub Section	Туре	Description		Mark "X" for all that apply	Projected Transmittal Date:	Projected Approval Date:	Projected Delivery Date:	
260221			MOTORS AND MOTOR CONTROLLERS						
260221		РАСК	Submit the product data, and quality control submittals specified below at the same time as a package Motor Controllers - Identify each controller for use with	D					
260221		PD	corresponding motor	D					
260221		PD	Motor Controllers - Describe overload devices	D					
260221		PD	Motor Controllers - Enumerate and describe all accessories	D					
260221		PD	All Motors - Catalog sheets, specifications and installation instructions	D					
260221		PD	All Motors - Data proving that voltage rating of each motor is in accordance with specified NEMA standard motor voltage	D					
260221		PD	All Motors - Data proving that the service factor and temperature rise for the motor's insulation system conforms to NEMA standards for each motor's specific application.	D					
260221		PD	All Motors - Data proving that the motor efficiency rating conforms to NEMA testing and marking standards MG1-12.54 and 12.55.	D					
260221		PD	Additional Data for Motors Controlled Adjustable Speed Motor Controllers - Data proving that the motor has been designed for use with associated controller	D					
260221		QCS	Company Field Advisor Data	D					
260221		ccs ccs	System acceptance test report Certificate: Affidavit, signed by the Company Field Advisor and notarized	F					
260221		CCS	Operation and Maintenance Data - 2 copies	F					
260221		CCS	Nameplates	F					
260221		ccs	Service Availability: A fully equipped service organization shall be available to service the completed Work	F					
260502			BASIC ELECTRICAL MATERIALS AND METHODS FOR DIRECT DIGITAL BUILDING CONTROL SYSTEM						
260502		PD	Statement from the Company producing the system, for each size and type of cable proposed for communication bus use, indicating that the electrical characteristics meet the requirements of the Company	D					
			For fire rated construction, prove that materials and installation methods proposed for use are in accordance with the listing requirements of the	_					
260502		PD	classified construction	D					
260502 260502		PD PD	Rigid Ferrous Metal Conduit Electrical Metallic Tubing	D					
260502		PD	Liquid-tight Flexible Metal Conduit	D					
260502		PD	Wireways, Fittings and Accessories	D					
260502		PD	Insulated Bushings, Plastic Bushings, Insulated Grounding Bushings	D					
260502		PD	Connectors and Couplings	D					
260502		PD	Conduit Bodies (Threaded)	D					

#### SCHEDULE OF SUBMITTALS PROJECT NO.: 47430-H Contractor's Projected Dates Send Critical SUBMITTALS FOR APPROVAL Allow at least 4 weeks for Approval Submittals to: (allows time for any resubmission) F Mark "X" F/O for all Projected Projected Projected Spec Sub D that apply Transmittal Approval Delivery Section Section Туре Description S Date: Date: Date: Expansion Fittings D 260502 PD 260502 PD Deflection Fittings D 260502 PD Sealing Fittings D Sealant for Raceways Exposed to Different PD Temperatures D 260502 260502 PD Vertical Conductor Supports D Galvanized Steel Boxes For Concealed Work D 260502 PD Galvanized Steel Junction and Pull Boxes For D 260502 PD Exposed Work PD Threaded Type Boxes For Exposed Work D 260502 260502 PD Specific Purpose Outlet Boxes D Outlet Boxes and Related Products for Fire Rated 260502 PD Construction D D Conductors and Accessories 260502 PD PD "C" Beam Clamps D 260502 D 260502 PD Pipe Straps Pipe Clamps D 260502 PD D PD Supporting Fastener (Metal Sud Construction) 260502 260502 EPD Environmental Product Declaration D WIRING FOR MOTORS AND MOTOR CONTROLLERS 260523 Complete wiring diagrams of all power and control 260523 SD connections (Standard diagrams will not be accepted) D Updated 07/24/2018 Printed 07/24/2018

# **SDVOB UTILIZATION PLAN** Initial Plan Revised plan Contract/Solicitation #

Veteran-Owned Business (SDVOB) under the contract. SDVOB subcontractors and suppliers as required by the that shows a lack of good faith as part of, or in conjuncti not limited to, termination of a contract for cause, loss o useful functions may not be counted toward SDVOB utili	By submission of this Plan, t SDVOB goals contained in th on with, the submission of a of eligibility to submit future b	he Bidder/Contractor ne Solicitation/Contrac Utilization Plan is prof ids, and/or withholding	commits to makir t. Making false re hibited by law an	ng good faith epresentatior d may result	efforts in the utilization of ns or providing information in penalties including, but	
BIDDER/CONTRACTOR INFORMATION				SDV	OB Goals In Contract	
Bidder/Contractor Name: NYS Vendor ID:						
Bidder/Contractor Address (Street, City, State and Zip	Code):					
Bidder/Contractor Telephone Number:		Contract Work Loo	cation/Region:			
Contract Description/Title:						
CONTRACTOR INFORMATION						
Prepared by (Signature):	Name and Title of Prepa	rer:	Telephone Number:		Date:	
Email Address:						
If unable to meet the SDVOB goals set forth on the SDVOB Waiver Form.	h in the solicitation/co	ntract, bidder/coi	ntractor mus	t submit a	request for waiver	
SDVOB Subcontractor/Supplier Name:						
Please identify the person you contacted:	Federal lo	Federal Identification No.: Telephone No.:				
Address:	Email Ado	Email Address:				
Detailed description of work to be provided by subo	contractor/supplier:					
Dollar Value of subcontracts/supplies/services (Wh perform): \$or%	ien \$ value cannot be estir	mated, provide the e	estimated % of	contract wo	rk the SDVOB will	
SDVOB Subcontractor/Supplier Name:						
Please identify the person you contacted:	Federal lo	Federal Identification No.: Teleph		phone No.:	hone No.:	
Address:	Email Ado	Email Address:				
Detailed Description of work to be provided by sub-	contractor/supplier:					
Dollar Value of subcontracts/supplies/services (Wh perform): \$or%	en \$ value cannot be esti	mated, provide the e	estimated % of	contract wo	rk the SDVOB will	

FOR OGS USE ONLY								
OGS Authorized Signature:	Accepted	☐ Accepted as Noted	☐ Notice of Deficiency					
NAME (Please Print): SDVOB			Date Received:	Date Processed:				
	%/\$							
Comments:								
NYS CERTIFIED SDVOB SUBCONTRACTOR/SUPPLIER INFORMATION: The directory of New York State Certified SDVOBs can be								
viewed at: https://ogs.ny.gov/Veterans/default.asp								
Note: All listed Subcontractors/Suppliers will	Note: All listed Subcontractors/Suppliers will be contacted and verified by OGS.							

# ADDITIONAL SHEET

Bidder/Contractor Name:	Contract/Solicitation <u>#</u>							
SDVOB Subcontractor/Supplier Name:								
Please identify the person you contacted:	Federal Identification No.:	Telephone No.:						
Address:	Email Address:							
Detailed Description of work to be provided by subcontractor	pr/supplier:							
Dollar Value of subcontracts/supplies/services (When \$ value cannot be estimated, provide the estimated % of contract work the SDVOB will perform): \$%								
SDVOB Subcontractor/Supplier Name:								
Please identify the person you contacted:	Federal Identification No.:	Telephone No.:						
Address:	Email Address:							
Detailed Description of work to be provided by subcontractor	pr/supplier:							
Dollar Value of subcontracts/supplies/services (When \$ value cannot be estimated, provide the estimated % of contract work the SDVOB will perform): \$								
SDVOB Subcontractor/Supplier Name:								
Please identify the person you contacted:	Federal Identification No.:	Telephone No.:						
Address:	Email Address:	Email Address:						
Detailed Description of work to be provided by subcontractor	pr/supplier:							
Dollar Value of subcontracts/supplies/services (When \$ value perform): \$or%	ue cannot be estimated, provide the estin	nated % of contract work the SDVOB will						
SDVOB Subcontractor/Supplier Name:								
Please identify the person you contacted:	Federal Identification No.:	Telephone No.:						
Address:	Email Address:							
Detailed Description of work to be provided by subcontractor/supplier:								
Dollar Value of subcontracts/supplies/services (When \$ value cannot be estimated, provide the estimated % of contract work the SDVOB will perform)): \$								
SDVOB Subcontractor/Supplier Name:								
Please identify the person you contacted:	Federal Identification No.:	Telephone No.:						
Address:	Email Address:	Email Address:						
Detailed Description of work to be provided by subcontractor	pr/supplier:							
Dollar Value of subcontracts/supplies/services (When \$ valuperform): \$	Dollar Value of subcontracts/supplies/services (When \$ value cannot be estimated, provide the estimated % of contract work the SDVOB will perform): \$or%							



## Division of Service-Disabled Veterans' Business Development

#### Instructions for Completing the Monthly SDVOB Compliance Report – SDVOB 101

The SDVOB Monthly Reporting Form is to be completed by the Contractor/Vendor, and submitted by the 10<sup>th</sup> day of *each* month for the duration of the Contract. This form should include **all** (e.g. SDVOB and non SDVOB) Subcontractors and/or Suppliers assigned by the Contractor/Vendor to perform work during the contract. This reporting should also include payments made by your Subcontractors and/or Suppliers to SDVOB firms.

Complete the form as specified below.

Contract No.	Indicate the OGS Contract No.
Contractor/Vendor Name and Address	Provide your firm's name and address.
Federal ID No.	Enter your firm's Federal ID No.
Goals	Indicate SDVOB participation goals.
Reporting Period	Fill in the month and year of reporting period. One copy must be submitted with final payment application.
Description of Project	Briefly describe the work you are providing under the terms of this contract.
Firm Name and Address	Provide the name, address and phone number of <b>all</b> Subcontractors/Suppliers assigned by the Contractor/Vendor on this contract or purchase agreement(s).
Federal ID No.	Enter the Subcontractor's/Supplier's Federal ID No. If no Federal ID No. has been assigned, provide only the owner's last four (4) digits of his or her Social Security No.
Payment This Month	Indicate the amount paid <i>this month</i> to each Subcontractor/Supplier. If there was no income activity for a Subcontractor/Supplier, please check the box indicating "No Payment This Month."
Contract Amount	Enter the total contract amount or purchase agreement(s) amount for each Subcontractor/Supplier.
Description of Work/Supplies	Briefly describe the work performed or supplies provided by each Subcontractor/Supplier.

Submit to:

Design & Construction SDVOB Compliance Specialist 35<sup>th</sup> Floor, Corning Tower Albany, New York 12242 Email: DCSDVOB@ogs.ny.gov

#### CONTRACTOR'S MONTHLY SDVOB COMPLIANCE REPORT (DUE ON THE 10<sup>TH</sup> DAY OF EACH MONTH FOR THE PRECEDING MONTH'S ACTIVITY AS EVIDENCE TOWARDS ACHIEVEMENT OF THE SDVOB GOALS ON THE CONTRACT)

Contract No.:

Contractor/Vendor Name, Address and Phone No.:	Contractor/Vendor Federal ID No .:	SDVOB Goals		Reporting Period			
	Description of Project:					Month	Year
				%			
Firm Name, Address and Phone Number (List All Firms)	Description of Work or Supplies Provided	Desi	gnation		Payment	This Month	Contract Amount
			🗌 Supp	blier			
		□ Sub	🗌 Tean	n			
		Broker	Othe	r			
		Joint Venture	🗌 No V	Vritten Contract			
Federal ID No.:		Uritten Contract	1		No Payme	ent This Month	
		SDVOB	🗌 Supp	blier			
		🔲 Sub	🔲 Tean	n			
		🔲 Broker	🔲 Othe	r			
		Joint Venture	🔲 No V	Vritten Contract	_		
Federal ID No.:		Uritten Contract			No Payment This Month		
		□ SDVOB	🗌 Supp	blier			
		🔲 Sub	🔲 Tean	n			
		Broker	🔲 Othe	r			
		Joint Venture	No Written Contract		_		
Federal ID No.:		Vritten Contract			└ No Paym	ent This Month	
			🔲 Supp	blier			
		🔲 Sub	🔲 Tean	n			
		🔲 Broker	🔲 Othe	r			
		Joint Venture	🗆 No V	Vritten Contract			
Federal ID No.:		Written Contract			No Paym	ent This Month	
Signature	,	Print Name and Title			Dat		
Gigriature					Da	For OG	S Use Only
Submission of this form constitutes the Contractor and accurate information may result in a finding of					omit complete	Reviewed By	Date:

## APPLICATION FOR WAIVER OF SDVOB PARTICIPATION GOAL

<i>(must be submitted before requestin</i> Section 1: Basic Information		mracy				
Contractor's Name:	Federal Identification Number					
Street Address:			E-Mail Address:			
Street Address.						
City, State, Zip Code:		Telephone:				
	() -					
Contract Number:				SDVOB CONTRACT GOALS		
			%			
Section 2: Type of SDVOB V	Vaiver Requested	1				
Total	Partial	If partial percenta	waiver, please enter ige:	the revised SDVOB	%	
Please explain the reason for the waiv	er request:					
Section 3: Supporting Docum Provide the following documentation waiver application: Attachment A. Copies of s Attachment B. Explanatio	as evidence of your good fa solicitations to SDVOBs and	any respo	nses thereto.	oals set forth in the contract and		
Attachment C. Dates of an		er meeting	s attended by Contrac	ctor, if any, scheduled by OGS v		
Attachment D. Information	n describing the specific step	os undertal	ken to reasonably stru	cture the contract scope of wor	k for the purpose of	
	aining supplies from, certified mation deemed relevant to t					
Section 4: Signature and Co	entact Information					
By signing and submitting this form pursuant to the SDVOB requiremer may result in a finding of noncomp	nts set forth under the soli	citation o	r Contract. Failure to	o submit complete and accura		
Prepared By: (Signature)				Date:	Date:	
Name and Title of Preparer (Print or T	Гуре)					

For OGS Use Only						
Reviewed By:	Date:					
Decision:						
<ul> <li>Full SDVOB waiver granted</li> <li>Partial SDVOB waiver granted; revised SDVOB goal:%</li> <li>SDVOB waiver denied</li> </ul>						
Approved By:	Date:					
Date Notice of Determination Sent:						
Comments						