


FIXTURE SCHEDULE	
<u>WC FLOOR MOUNTED WATER CLOSET</u> <u>FIXTURE</u> FLOOR MOUNTED 10" ROUGHING WATER SAVER (1.5 GPF) WHITE VITREOUS CHINA , ELONGATED BOWL, SIPHON JET, 1 1/2" TOP SPUD, AMERICAN STANDARD "MADERA", MODEL NO. 2234.015 OR EQUAL. MTG. HT= 14-1/8" COLOR BY ARCHITECT. <u>SEAT</u> WHITE, OPEN FRONT, OLSONITE MODEL NO. 95 OR EQUAL. <u>FLUSH VA</u> MANUAL FLUSH VALVE, 1.28 GPF, TOP SPUD CONNECTION, 1" SUPPLY CONNECTION, DIAPHRAGM VALVE, DUAL-FILTERED FIXED BYPASS DIAPHRAGM SLOAN MODEL 111-1.28	<u>DF/BF DRINKING FOUNTAIN/BOTTLE FILL</u> <u>FIXTURE</u> ELKAY ENHANCED EZH2O BOTTLE FILLING STATION & BI-LEVEL ADA COOLER ELKAY MODEL . LZSTLBWSLP <u>TRAP</u> - 1 1/2" CHROME PLATED "P"-TRAP , TRAP NIPPLE AND ESCUTCHEON PLATE. <u>SUPPLY</u> - CHROME PLATED 1/2" NIPPLES AND ESCUTCHEONS WITH 1/2" ANGLE <u>SUPPORT</u> ELKAY MLP200 IN-WALL CARRIER
<u>WC FLOOR MOUNTED WATER CLOSET (ADA)</u> <u>FIXTURE</u> FLOOR MOUNTED, 10" ROUGHING, 17" HIGH FOR HANDICAPPED WATER SAVER (1.6 GPF), WHITE VITREOUS CHINA, ELONGATED BOWL, SIPHON JET, 11/2" TOP SPUD, AMERICAN STANDARD "MADERA" MODEL NO. 3043.102 OR EQUAL COLOR BY ARCHITECT. <u>SEAT</u> WHITE, OPEN FRONT, OLSONITE MODEL NO. 95 OR EQUAL. <u>FLUSH VA</u> MANUAL FLUSH VALVE, 1.28 GPF, TOP SPUD CONNECTION, 1" SUPPLY CONNECTION, DIAPHRAGM VALVE, DUAL-FILTERED FIXED BYPASS DIAPHRAGM SLOAN MODEL 111-1.28	<u>MOP MOP SINK</u> <u>FIXTURE</u> - TERRAZZO, SQUARE DROP FRONT MOP RECEPTOR, 12" HIGH AND 1-3/4" WIDE SHOULDER, GALVANIZED BONDERIZED STEEL FLANGE WILL BE CAST INTEGRAL AND EXTEND AT LEAST 1" ABOVE SHOULDER ON TWO (2) SIDES, 3" DRAIN, STAINLESS STEEL CAP TO BE CAST INTEGRAL ON DROP. SIDE DRAIN BODY SHALL BE BRASS CAST INTEGRAL AND PROVIDES FOR A NON-CAULKED CONNECTION NOT LESS THAN 1" DEEP TO A 3"PIPE. RECEPTOR SHALL BE MANUFACTURED OF TAN AND WHITE MARBLE CHIPS CAST IN WHITE PORTLAND CEMENT WITH A COMPRESSIVE STRENGTH OF 3000 PSI, TERRAZZO SURFACE SHALL BE GROUND AND POLISHED WITH ALL AIR HOLES AND OR PITS GROUTED AND THE EXCESS REMOVED AND SEALED TO RESIST STAINS AND MOISTURE. RECEPTOR SHALL BE REINFORCED WITH 16 GA. WIRE. OVERALL SIZE 24"Lx24"Wx12"H WITH FLANGE. FLORESTONE OR EQUAL MODEL 60LH-24"x24"-12" <u>STRAINER</u> - DOME TYPE CHROME PLATED FLORESTONE OR EQUAL MODEL NO. MR-376
<u>URNL URINALS</u> <u>FIXTURE</u> : BARRIER FREE, WALL HUNG VITREOUS CHINA, ULTRA HIGH EFFICIENCY 0.125 GPF - 1.0 GPF, ELONGATED 14" RIM, WASHOUT FLUSH ACTION, 3/4" INLET SPUD, AND 2" THREADED NPTF OUTLET CONNECTION. AMERICAN STANDARD OR EQUAL "WASHBROOK" MODEL No. 6590.001 COLOR BY ARCHITECT <u>FLUSH VALVE</u> 0.5 GPF, POLISHED CHROME, MANUAL FLUSHOMOTER, DIAPHRAGM VALVE, SEMI-RED BRASS VALVE BODY, TOP SPUD CONNECTION, 11.5" ROUGH IN, 0.75" SPUD COUPLING, 0.75" SUPPLY, ADA COMPLIANT, ANSI/ASME 112.19.2 MODEL SLOAN 186-0.5-DFB <u>SUPPORT</u> : DUCO CAST IRON, WALL HANGER WITH BOTTOM BEARING PLATE JR SMITH OR EQUAL MODEL NO. 0637	<u>MOP HANGER</u> - WALL MOUNTED WITH 3 CLAMPS FLORESTONE OR EQUAL MODEL NO. MR-372 <u>HOSE</u> - 3/4" HOSE FIVE FEET LONG WITH CLAMP FLORESTONE OR EQUAL MODEL NO. MR-370 <u>SUPPLY</u> 1/2" NPT SWEAT TYPE, CHROME PLATED WITH STOP VALVES. <u>FAUCET</u> - ROUGH CHROME PLATED CAST BRASS, 3/4 TURN CERAMIC CARTRIDGES, VANDAL-RESISTANT FOUR ARM HANDLES WITH COLOR CODED INDEXES. CAST BRASS NOZZLE WITH 3/4" HOSE THREAD, PAIL HOOK AND TOP BRACE. BRASS VACUUM BREAKER, BRASS TOP BRACE ASSEMBLY WITH ADJUSTABLE THREADED BRASS WALL FLANGE, & 1/2"NPTF INLETS. SPEAKMAN OR EQUAL MODEL NO SC-5811-RCF
<u>LAV WALLMOUNT LAVATORY (ADA)</u> <u>FIXTURE</u> : AMERICAN STANDARD ADA COMPLIANT LUCERNE WALL MOUNTED LAVATORY SINK MODEL 0356.028.020 <u>TRAP</u> 1 1/4" CHROME PLATED "P" - TRAP, TRAP NIPPLE AND ESCUTCHEON PLATE. <u>SUPPLY</u> 3/8" NIPPLES AND ESCUTCHEONS WITH 3/8" ANGLE STOPS. <u>FAUCET</u> ADA COMPLIANT, POLISHED CHROME, 4" CENTERSET, AMERICAN STANDARD RUMSON MOCEL 7417201.002 <u>SUPPORT</u> FLOOR MOUNTED TYPE SUPPORT JR SMITH OR EQUAL FIGURE NO. 0700-27-M31	<u>EYE WASH STATION (AT APP BAY)</u> <u>FIXTURE</u> ULINE MODEL H-5795 <u>TRAP</u> - 1 1/4" CHROME PLATED "P" - TRAP, TRAP NIPPLE AND ESCUTCHEON PLATE. <u>SUPPLY</u> - 1/2" NIPPLES AND ESCUTCHEONS WITH 3/8" ANGLE STOPS.
<u>LAV WALLMOUNT LAVATORY</u> <u>FIXTURE</u> : AMERICAN STANDARD LUCERNE WALL MOUNTED LAVATORY SINK MODEL 0356.028.020 <u>TRAP</u> 1 1/4" CHROME PLATED "P" - TRAP, TRAP NIPPLE AND ESCUTCHEON PLATE. <u>SUPPLY</u> 3/8" NIPPLES AND ESCUTCHEONS WITH 3/8" ANGLE STOPS. <u>FAUCET</u> POLISHED CHROME, 4" CENTERSET, AMERICAN STANDARD RUMSON MOCEL 7417201.002 <u>SUPPORT</u> FLOOR MOUNTED TYPE SUPPORT JR SMITH OR EQUAL FIGURE NO. 0700-27-M31	<u>SINK</u> <u>FIXTURE</u> - SINGLE COMPARTMENT 24"Lx18"Wx7-5/8"DEEP BOWL,COUNTERTOP 18 GAUGE TYPE 304 18-8 NICKEL BEARING STAINLESS STEEL, SELF RIMMING, COVED CORNERS 1-3/4" VERTICAL AND HORIZONTAL RADIUS, BOWL AND FAUCET DECK RECESS 3/16" BELOW OUTSIDE EDGE OF SINK, FULLY COATED UNDERSIDE TO DAMPEN SOUND AND PREVENT CONDENSATE, AND FOUR (4) 1-1/2"Ø FAUCET HOLES Ø 4" CENTERS. ELKAY OR EQUAL "LUSTERTONE" MODEL No. 1716 <u>SUPPLY</u> 3/8" OD COMPRESSION TYPE FITTINGS WITH CHROME PLATED STOP VALVES. <u>TRAP</u> 1-1/2" TAILPIECE & ESCUTCHEON CHROME PLATED <u>FAUCET</u> ADA COMPLIANT, DUAL HANDLE MIXING FAUCET ON DECK MOUNTED ESCUTCHEON. METAL HANDLES, TUBULAR BRASS HI-ARC CONTEMPORARY STYLE SWING SPOUT WITH RESTRICTED FLOW AERATOR FINISHED IN CHROME PLATE. REMOVABLE DIACORE CARTRIDGES AND 150° TURN OF THE HANDLE CONTROLS FROM DRIP-FREE OFF TO FULL ON. RETRACTABLE SPRAY AND HOSE, WITH 4 FAUCET HOLES REQUIRED AND 1/2" IP CONNECTIONS. FLOW RATE 2.5 GPM MAX. Ø 80 PSI. ELKAY OR EQUAL MODEL No. LK2443. <u>HANDLES</u> CHROME PLATED WRIST BLADE TYPE "AMARILLIS SERIES" AMERICAN STANDARD OR EQUAL MODEL NO. 172H
<u>CWSH-1 GEAR WASHER (PURCHASED BY OWNER INSTALLED BY PLUMBER)</u> <u>DESCRIPTION</u> : 25 LB CAPACITY GEAR WASHER EXTRACTOR OVERALL SIZE 29"W x 36.31"D x 43.19"HIGH. WATER VALVES 0.75", DRAIN VALVE 2". SINGLE MOTOR DRIVE- 1 HP. MFG. MILNOR MODEL No. MWT12J5 <u>WSHR STACKED WASHING MACHINE/DRYER</u> <u>DESCRIPTION</u> : SINGLE UNIT LG WASHTOWER WITH CENTER CONTROL. MODEL NO. WKEX200HBA	<u>SPOS-1 ELEVATOR SUMP PUMP</u> <u>DESCRIPTION</u> : 1/3 HP, 115V, SINGLE-PHASE, 5.2 FULL LOAD AMPS, THERMAL OVERLOAD TEMP 221°F, 1 1/2" DISCHARGE. 10' STANDARD CORD LENGTH - UP TO 50'. 9.5"W x 6.5"L OIL DETECTOR WITH CONTROL PANEL & REMOTE ALARM LIBERTY PUMP, MODEL "ELV250 SERIES WITH OILTECTOR" <u>CNDS-1 CONDENSATE PUMP</u> <u>DESCRIPTION</u> : EXTERNAL TEST/RUN LEVER, SLIM FOOTPRINT, VERTICAL CENTRIFUGAL PUMP DESIGN, STAINLESS STEEL MOTOR SHAFT, AUTO START AND STOP OPERATION, OVERFLOW DETECTION SWITCH, 115V/1PH/1.5A, 3/80 H.P. LITTLE GIANT MODEL VCMX-20ULS
ALL MODEL NUMBERS SHOWN ARE BASED ON INFORMATION GATHERED DURING DESIGN, AND ARE SUBJECT TO CHANGE BY MANUFACTURER. CONTRACTOR SHALL NOT RELY ON THE MODEL NUMBER ALONE BUT SHALL RELY ON SPECIFICATIONS SHOWN ON SCHEDULES. THE ENGINEER ASSUMES NO RESPONSIBILITY FOR REVISED MODEL NUMBERS. VERIFY ALL MODELS WITH ARCHITECT PRIOR TO PURCHASE OR INSTALLATION.	

DATE: ISSUE

04-21-21
ISSUED FOR BIDDING

SEAL:

SENDEWSKI ARCHITECTS PC
ARCHITECTS - PLANNERS
215 ROANOKE AVENUE
RIVERHEAD, NY 11901
(631) 727-5352
9 SELENA COURT
WALDEN, NY 12586
(845) 275-8859

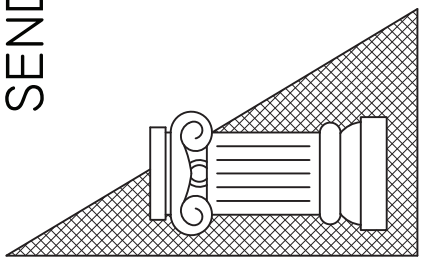

HARRISON FIRE DEPT.

PROPOSED ADDITION

206 HARRISON AVE
HARRISON, NY 10528

PLUMBING
FIXTURE SCHEDULE

PROJECT #: 2020-04

DRAWN BY: SEND. ARCH.

CAD FILE: P/2020/HFD
2020-04

DRAWING#:

P-2