



3 THRU WALL REGLET & COUNTER FLASHING

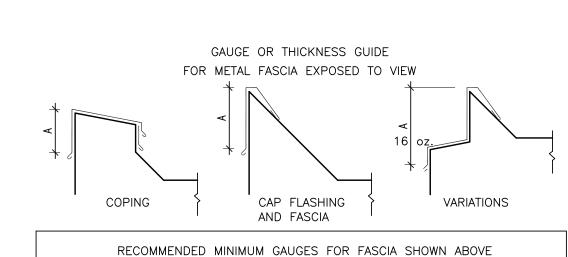

RECOMMENDED MINIMUM GAUGES FOR FASCIA SHOWN ABOVE				
EXPOSED FACE WITHOUT BREAKS "A" DIMENSION	CLEAT REQUIRED	GALVANIZED IRON	COLD ROLLED COPPER	ALUMINUM 3003-H14
UP TO 4" FACE	NO	26 GA.	16 oz.	.032" (20 GA.)
4" TO 6" FACE	YES	26 GA.	16 oz.	.040" (18 GA.)
6" TO 8" FACE	YES	24 GA.		.050" (16 GA.)
8" TO 10" FACE	YES	22 GA.	20 oz.	.064" (14 GA.)
10" TO 15" FACE	YES	20 GA.	ADD BRAKES TO STIFFEN	.080" (12 GA.)
NOTE:			1	1

1. WHEN USING THE ABOVE TABLE, OTHER ITEMS SHOULD BE CONSIDERED, SUCH AS FASTENING PATTERN. FOR INSTANCE, IF THE METAL CAN ONLY BE FASTENED AT 100' FOOT INTERVALS, A HEAVIER GAUGE METAL WOULD BE REQUIRED. ALL CLEATS SHALL BE CONTINUOUS AND OF SAME MATERIAL OF EQUAL OR GREATER THICKNESS THAN THE FASCIA METAL USED.


2 FASCIA THICKNESS SCALE: N.T.S.

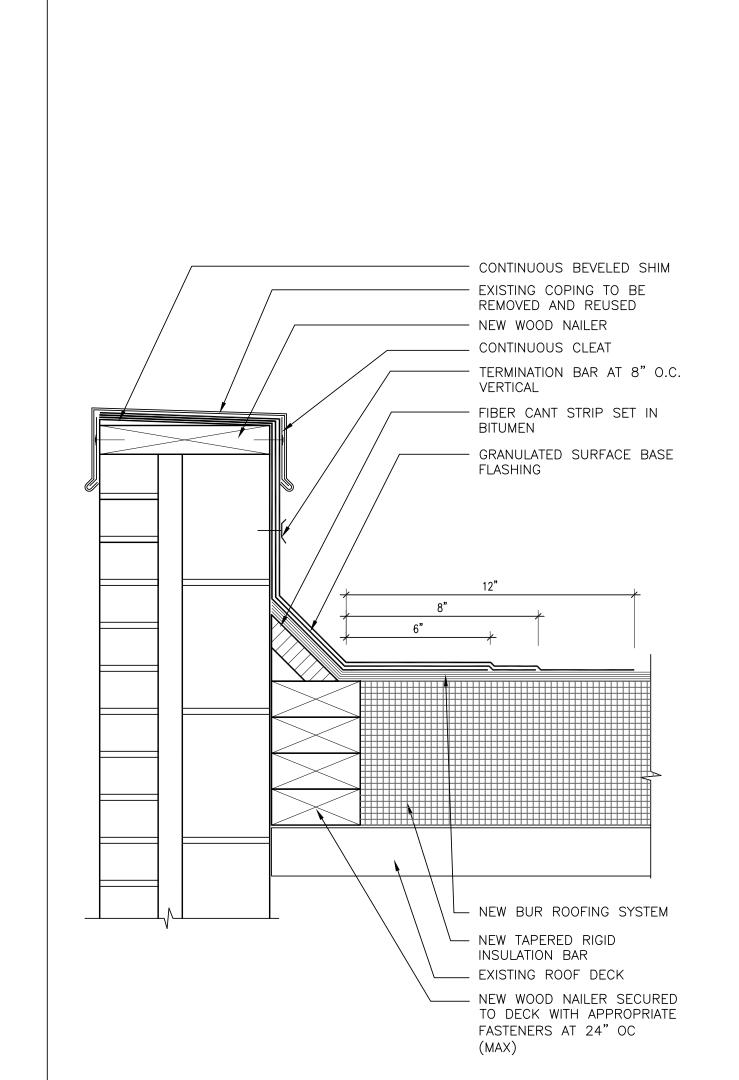




ROOFING PRODUCTS

NOTES: SEE SPECIFICATION 07511 FOR SPECIFIC

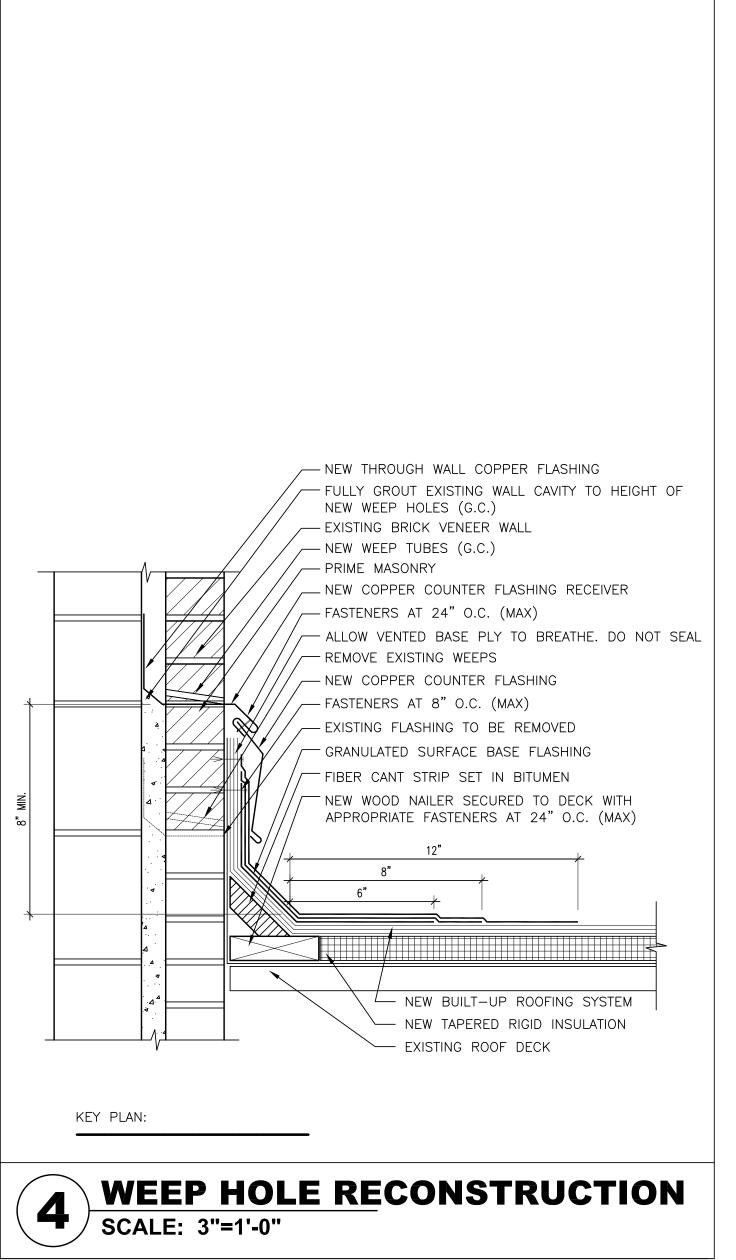

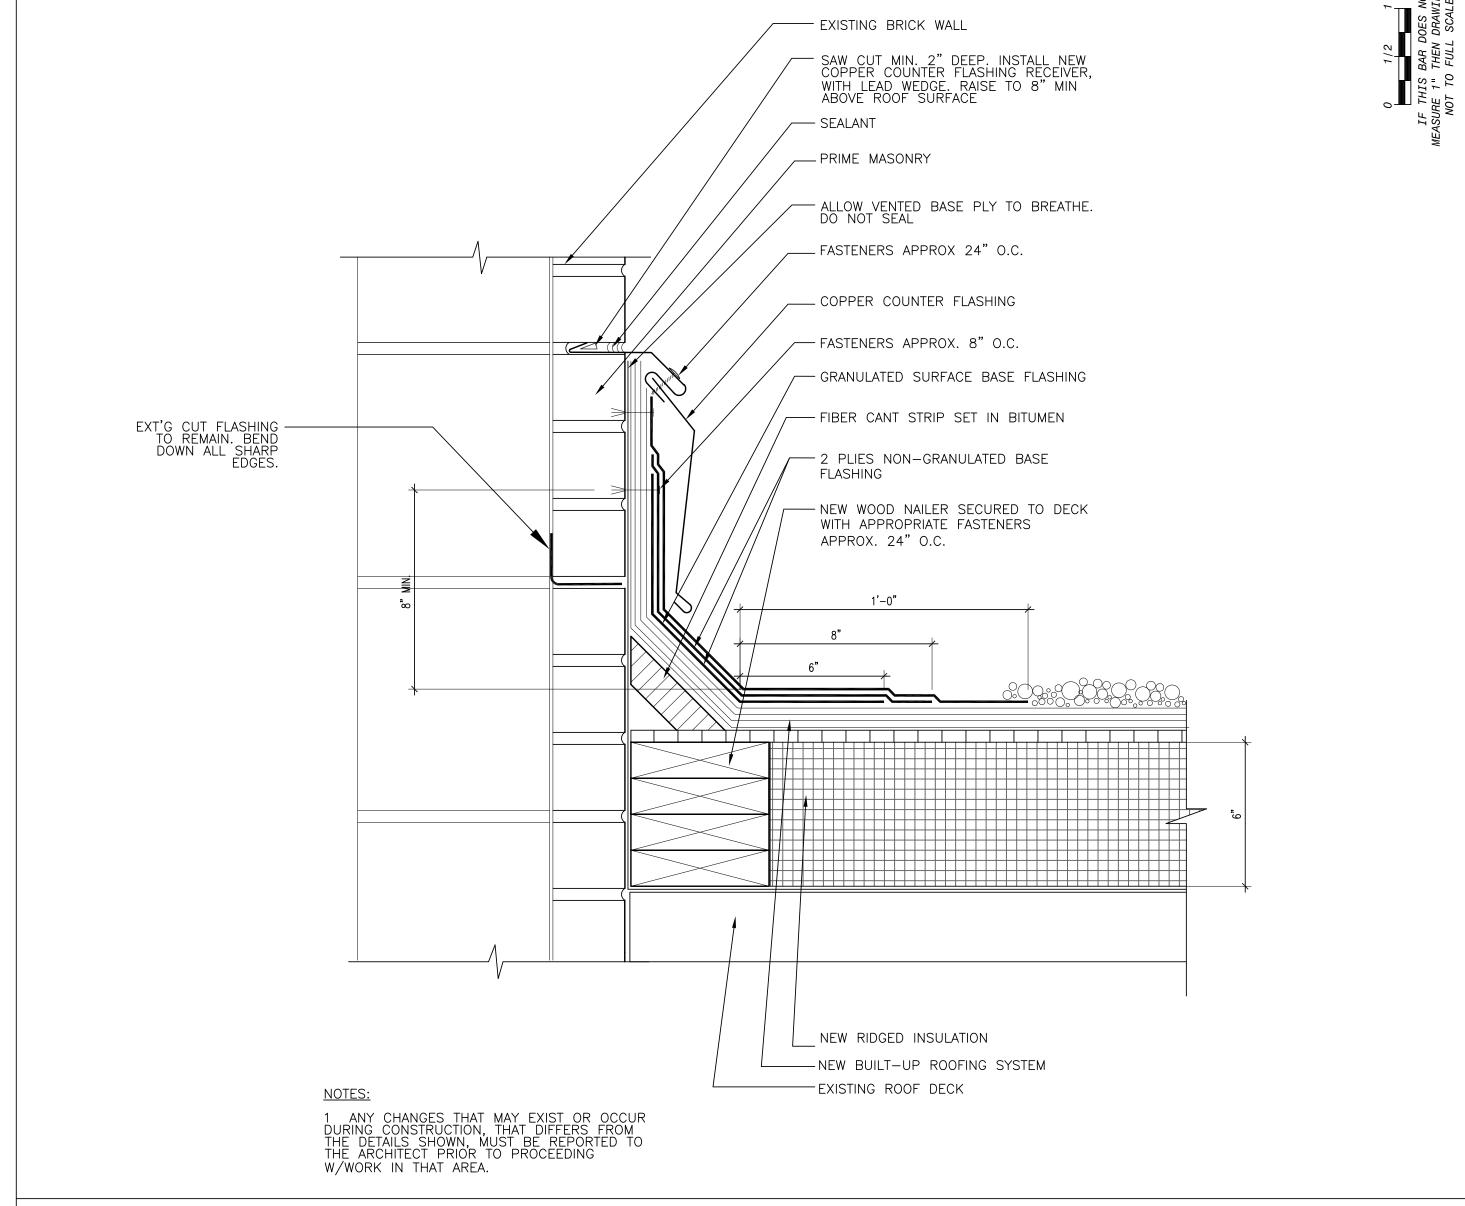

1 FLASHING AT WALL SCALE: 3" = 1'-0"

Drawing Title

ROOF DETAIL

NORTH ROCKLAND HIGH SCHOOL ANNEX ROOF REPLACEMENT

awing No. **A-501**