



Table of Contents Old Oaks CC

<b>Item</b>	<b>MfrName</b>	<b>Model</b>	<b>Category</b>	<b>Page</b>
2	Perlick	BBSN72**R	Back Bar Equipment	3
3	Perlick	BBSN72**L	Back Bar Equipment	6
4	Perlick	TS12BLW	Underbar Blender Station	9
5	Perlick	TS18	Underbar Fillers & Drainboards	12
7	Perlick	TS24IC-EC10	Underbar Ice Chest	15
8	Perlick	TS12LS	Underbar Liquor Display	18
9	Perlick	TS12HSN	Underbar Handsink	21
10	Perlick	TS53C	Underbar Sink	24
11	Perlick	TS24IC-EC10	Underbar Ice Chest	27
13	Perlick	TS24LS	Underbar Liquor Display	30
14	Perlick	TS14BLW	Underbar Blender Station	33
15	Perlick	MBV05	Underbar Modular Bar Die	36
16	Victory	VERSA-1D-GD-HC	Refrigerator, Reach-In	41

# Perlick - BBSN72\*\*R



## Perlick - BBSN72\*\*R

Item: 2

Qty: 1

Category: Back Bar Equipment

### Electrical

4.2 Amps, 0.25 HP, 120 Volts, 1 Ph, 60 Hz, Cord/Plug., 5-15P NEMA

Remarks -

### Plumbing

Indirect Drain

1" Conn., 0.25" AFF

### HVAC

Remarks -

### Equipment

Remarks -

### Refrigeration

Remarks -

ACH = Above Counter Height, AFF = Above Finished Floor

## PRODUCT SPECIFICATION SHEETS ► Refrigerated Cabinets



## SELF-CONTAINED NARROW DOOR REFRIGERATOR

### 1-, 2-, 3- AND 4-DOOR



BBSN72 shown



eco friendly  
R290 Hydrocarbon Refrigerant



NSF/ANSI Standard 7 Listed for open food storage.

*Note: Models furnished with wine temperature are listed for the storage and display of bottled and canned products only.*

JOB	
AREA	
ITEM NO.	
MODEL NO.	
BBSN32	1-Door Model
BBSN52	2-Door Model
BBSN72	3-Door Model
BBSN92	4-Door Model

MODEL NUMBERS		BBSN32	BBSN52	BBSN72	BBSN92
NUMBER OF DOORS		1	2	3	4
EXTERIOR CABINET DIMENSIONS	Length - in. (mm)	32 (813)	52 (1321)	72 (1829)	92 (2337)
	Depth - in. (mm)	24¾ (629)	24¾ (629)	24¾ (629)	24¾ (629)
	Height - in. (mm)	34⅞ (878)	34⅞ (878)	34⅞ (878)	34⅞ (878)
INTERIOR CABINET DIMENSIONS	Length - in. (mm)	16⅞ (418)	36⅞ (926)	56⅞ (1434)	76⅞ (1942)
	Depth - in. (mm)	18¾ (476)	18¾ (476)	18¾ (476)	18¾ (476)
	Height - in. (mm)	31 (787)	31 (787)	31 (787)	31 (787)
INTERNAL VOLUME Net. Cu. Ft. (Litres)		6.0 (170)	13.3 (377)	20.6 (583)	27.8 (787)
PRODUCT CAPACITY	CASE PACKED - 12 OZ. BOTTLE/CAN	161/238	329/483	518/763	707/1043
	STAGGERED - 12 OZ. BOTTLE/CAN	173/255	354/517	565/819	765/1121
SHIPPING WEIGHT Lbs. (kg.)		248# (112kg)	344# (156kg)	446# (202kg)	577# (262kg)
ELECTRICAL SPECIFICATIONS	Electrical Supply	120 VAC/60 Hz/1 Ph			
	Running Load Amps	1.8	2.5	4.2	4.2
	Electrical Connection	Cord connected	Cord connected	Cord connected	Cord connected
	Cord Plug Type	NEMA 5-15	NEMA 5-15	NEMA 5-15	NEMA 5-15
	Cord Length	8'	8'	8'	8'
	Defrost Initiation	Automatic	Automatic	Automatic	Automatic
	Defrost Type	Off cycle	Off cycle	Off cycle	Off cycle
	Thermostat	Digital control	Digital control	Digital control	Digital control
REFRIGERATION SPECIFICATIONS	Lighting Type	LED	LED	LED	LED
	Horsepower	1/6	1/5	1/4	1/4
	Refrigerant	R290	R290	R290	R290
	Refrigerant Charge (grams)	90	100	90	90
	Factory Temperature Setting - Refrigerator F (C)	38° (3.3°)	38° (3.3°)	38° (3.3°)	38° (3.3°)
	Temperature Range - Refrigerator F (C)	33°-40° (0.5°-4.5°)	33°-40° (0.5°-4.5°)	33°-40° (0.5°-4.5°)	33°-40° (0.5°-4.5°)
	Factory Temperature Setting - White Wine F (C)	50°-55° (10.0°-13.0°)	50°-55° (10.0°-13.0°)	50°-55° (10.0°-13.0°)	50°-55° (10.0°-13.0°)
	Factory Temperature Setting - Red Wine F (C)	60°-65° (15.5°-18.0°)	60°-65° (15.5°-18.0°)	60°-65° (15.5°-18.0°)	60°-65° (15.5°-18.0°)
	Temperature Range - Wine F (C)	50°-65° (10.0°-18.0°)	50°-65° (10.0°-18.0°)	50°-65° (10.0°-18.0°)	50°-65° (10.0°-18.0°)
	Condensing Unit Location	Left or Right	Left or Right	Left or Right	Left or Right
	Expansion Device	Capillary tube	Capillary tube	Capillary tube	Capillary tube
Pull-Out Condensing Unit	Yes	Yes	Yes	Yes	
Front Vented	Yes	Yes	Yes	Yes	
PLUMBING	Evaporator Condensate	Automatically	Automatically	Automatically	Automatically







Form No. 95177  
Rev. 12.18.2018

PERLICK CORPORATION 8300 W. Good Hope Rd., Milwaukee, WI 53223 • (800) 558-5592 • perlick.com

PRODUCT SPECIFICATION SHEETS ▶ Refrigerated Cabinets

**Perlick®** **SELF-CONTAINED NARROW DOOR REFRIGERATOR**  
 1-, 2-, 3- AND 4-DOOR

Note: Open floor drain not provided on models intended for non-packaged food.

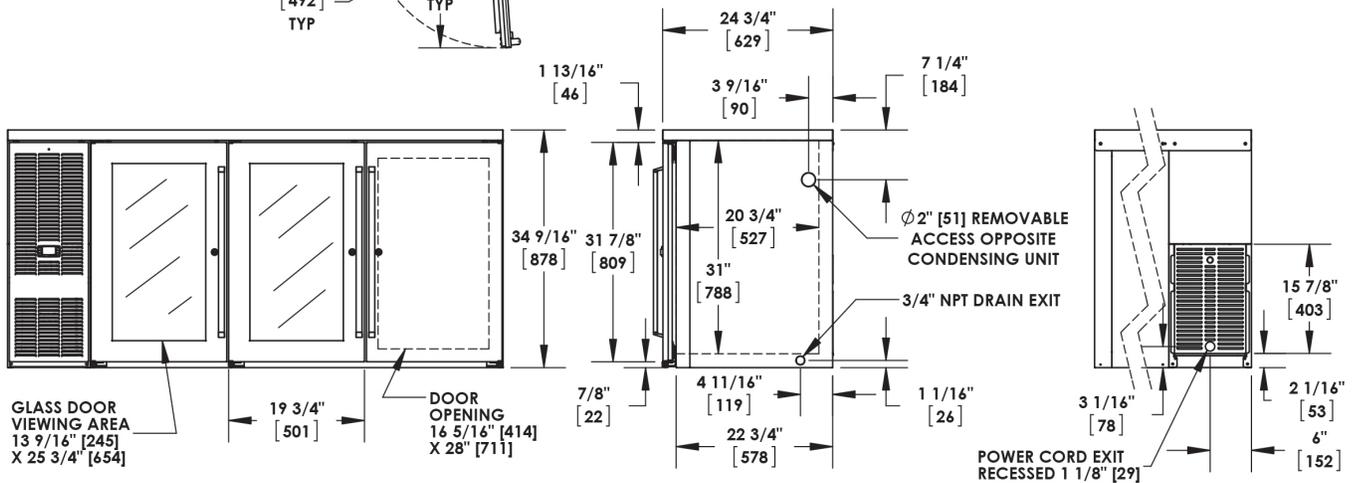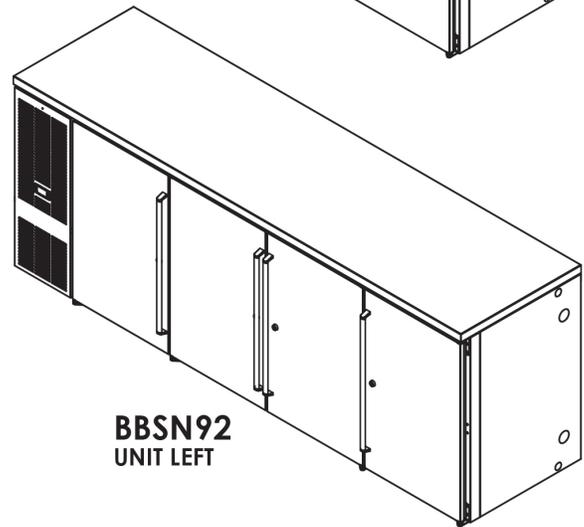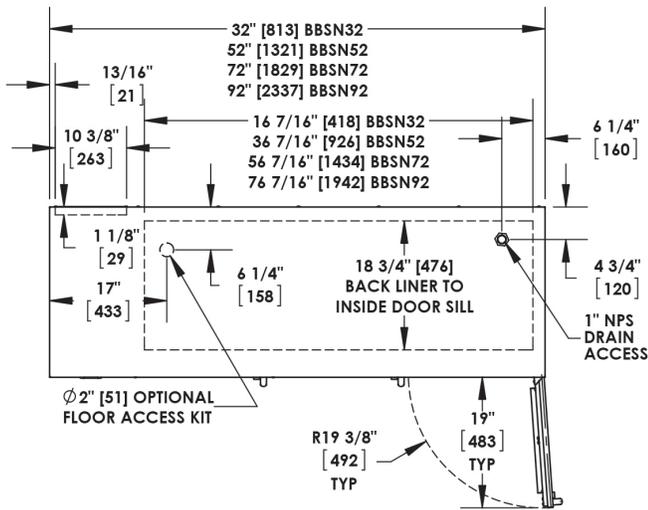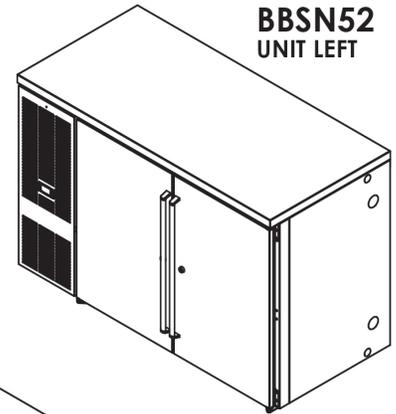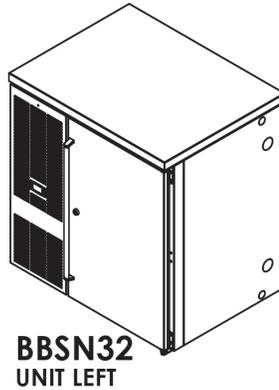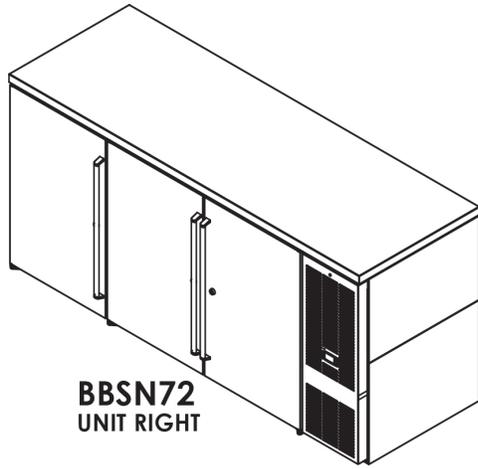

California Prop 65 Notice:

**!** **WARNING:** The materials used in this product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm, For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Form No. 95177  
Rev. 12.18.2018

**PERLICK CORPORATION** 8300 W. Good Hope Rd., Milwaukee, WI 53223 • (800) 558-5592 • [perlick.com](http://perlick.com)

# Perlick - BBSN72\*\*L



## Perlick - BBSN72\*\*L

Item: 3

Qty: 1

Category: Back Bar Equipment

### Electrical

4.2 Amps, 0.25 HP, 120 Volts, 1 Ph, 60 Hz, Cord/Plug., 5-15P NEMA

Remarks -

### Plumbing

Indirect Drain

1" Conn., 0.25" AFF

### HVAC

Remarks -

### Equipment

Remarks -

### Refrigeration

Remarks -

ACH = Above Counter Height, AFF = Above Finished Floor

**PRODUCT SPECIFICATION SHEETS** ▶ Refrigerated Cabinets

**SELF-CONTAINED NARROW DOOR REFRIGERATOR**  
 1-, 2-, 3- AND 4-DOOR


BBSN72 shown



ecofriendly

R290 Hydrocarbon Refrigerant



NSF/ANSI Standard 7 Listed for open food storage.

Note: Models furnished with wine temperature are listed for the storage and display of bottled and canned products only.

JOB	
AREA	
ITEM NO.	
MODEL NO.	
BBSN32	1-Door Model
BBSN52	2-Door Model
BBSN72	3-Door Model
BBSN92	4-Door Model

MODEL NUMBERS		BBSN32	BBSN52	BBSN72	BBSN92
NUMBER OF DOORS		1	2	3	4
EXTERIOR CABINET DIMENSIONS	Length - in. (mm)	32 (813)	52 (1321)	72 (1829)	92 (2337)
	Depth - in. (mm)	24¾ (629)	24¾ (629)	24¾ (629)	24¾ (629)
	Height - in. (mm)	34⅞ (878)	34⅞ (878)	34⅞ (878)	34⅞ (878)
INTERIOR CABINET DIMENSIONS	Length - in. (mm)	16⅞ (418)	36⅞ (926)	56⅞ (1434)	76⅞ (1942)
	Depth - in. (mm)	18¾ (476)	18¾ (476)	18¾ (476)	18¾ (476)
	Height - in. (mm)	31 (787)	31 (787)	31 (787)	31 (787)
INTERNAL VOLUME Net. Cu. Ft. (Litres)		6.0 (170)	13.3 (377)	20.6 (583)	27.8 (787)
PRODUCT CAPACITY	CASE PACKED - 12 OZ. BOTTLE/CAN	161/238	329/483	518/763	707/1043
	STAGGERED - 12 OZ. BOTTLE/CAN	173/255	354/517	565/819	765/1121
SHIPPING WEIGHT Lbs. (kg.)		248# (112kg)	344# (156kg)	446# (202kg)	577# (262kg)
ELECTRICAL SPECIFICATIONS	Electrical Supply	120 VAC/60 Hz/1 Ph			
	Running Load Amps	1.8	2.5	4.2	4.2
	Electrical Connection	Cord connected	Cord connected	Cord connected	Cord connected
	Cord Plug Type	NEMA 5-15	NEMA 5-15	NEMA 5-15	NEMA 5-15
	Cord Length	8'	8'	8'	8'
	Defrost Initiation	Automatic	Automatic	Automatic	Automatic
	Defrost Type	Off cycle	Off cycle	Off cycle	Off cycle
	Thermostat	Digital control	Digital control	Digital control	Digital control
REFRIGERATION SPECIFICATIONS	Lighting Type	LED	LED	LED	LED
	Horsepower	1/6	1/5	1/4	1/4
	Refrigerant	R290	R290	R290	R290
	Refrigerant Charge (grams)	90	100	90	90
	Factory Temperature Setting - Refrigerator F (C)	38° (3.3°)	38° (3.3°)	38° (3.3°)	38° (3.3°)
	Temperature Range - Refrigerator F (C)	33°-40° (0.5°-4.5°)	33°-40° (0.5°-4.5°)	33°-40° (0.5°-4.5°)	33°-40° (0.5°-4.5°)
	Factory Temperature Setting - White Wine F (C)	50°-55° (10.0°-13.0°)	50°-55° (10.0°-13.0°)	50°-55° (10.0°-13.0°)	50°-55° (10.0°-13.0°)
	Factory Temperature Setting - Red Wine F (C)	60°-65° (15.5°-18.0°)	60°-65° (15.5°-18.0°)	60°-65° (15.5°-18.0°)	60°-65° (15.5°-18.0°)
	Temperature Range - Wine F (C)	50°-65° (10.0°-18.0°)	50°-65° (10.0°-18.0°)	50°-65° (10.0°-18.0°)	50°-65° (10.0°-18.0°)
	Condensing Unit Location	Left or Right	Left or Right	Left or Right	Left or Right
	Expansion Device	Capillary tube	Capillary tube	Capillary tube	Capillary tube
Pull-Out Condensing Unit	Yes	Yes	Yes	Yes	
Front Vented	Yes	Yes	Yes	Yes	
PLUMBING	Evaporator Condensate	Automatically	Automatically	Automatically	Automatically


 Form No. 95177  
 Rev. 12.18.2018

PERLICK CORPORATION 8300 W. Good Hope Rd., Milwaukee, WI 53223 • (800) 558-5592 • perlick.com

**PRODUCT SPECIFICATION SHEETS** ▶ Refrigerated Cabinets

**SELF-CONTAINED NARROW DOOR REFRIGERATOR**  
 1-, 2-, 3- AND 4-DOOR

Note: Open floor drain not provided on models intended for non-packaged food.

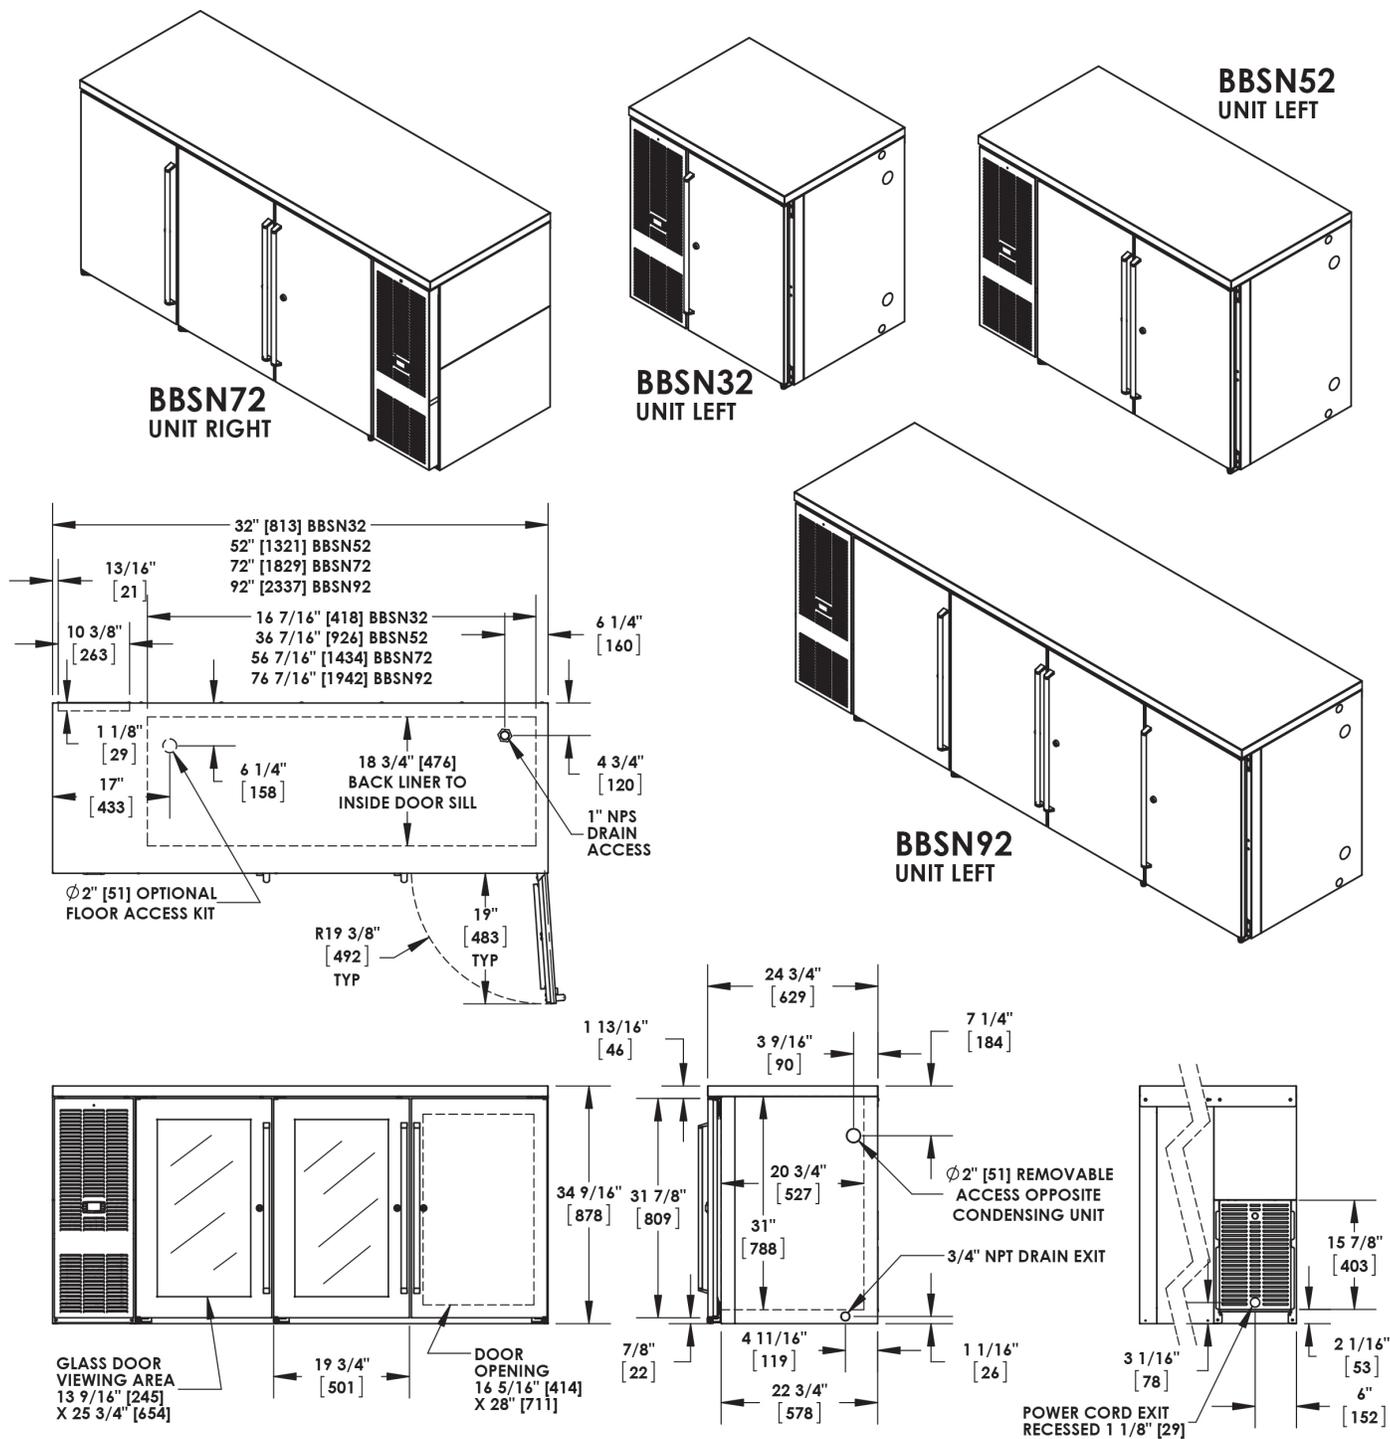
**California Prop 65 Notice:**


**WARNING:** The materials used in this product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

 Form No. 95177  
 Rev. 12.18.2018

**PERLICK CORPORATION** 8300 W. Good Hope Rd., Milwaukee, WI 53223 • (800) 558-5592 • [perlick.com](http://perlick.com)

# Perlick - TS12BLW



## Perlick - TS12BLW

Item: 4

Qty: 1

Category: Underbar Blender Station

### Plumbing

Hot Water

0.375" Conn., 13" AFF

Cold Water

0.375" Conn., 13" AFF

Indirect Drain

1.5" Conn., 21" AFF

### Electrical

Remarks -

### HVAC

Remarks -

### Equipment

Remarks -

### Refrigeration

Remarks -

ACH = Above Counter Height, AFF = Above Finished Floor

**PRODUCT SPECIFICATION SHEETS** ▶ Underbar Sinks


**UNDERBAR SINKS**  
**12" BLENDER STATION WITH SINK**


JOB	
AREA	
ITEM NO.	
MODEL NO.	

MODELS	
TS Series	TSD Series
TS12BLW	TSD12BLW


**Perlick Features**

- Deep drawn stainless steel bowl.
- NSF listed, commercial grade hot/cold water faucet (must be ordered separately).
- Underside is sound-deadened.
- Convenient front-mounted shelf with access hole for electrical cord.
- Stainless steel legs install without tools and have "Rust Free" Thermoplastic feet.


 Form No. BL01  
 Rev. 10.21.2016

**PERLICK CORPORATION** 8300 W. Good Hope Rd., Milwaukee, WI 53223 • 800.558.5592 • perlick.com


## PRODUCT SPECIFICATION SHEETS ► Underbar Sinks

**UNDERBAR SINKS**  
**12" BLENDER STATION WITH SINK**

<b>MODEL NOS.</b>	<b>TS(D)12BLW</b>
<b>LENGTH IN. (mm)</b>	12" (305)
<b>SHIP WT. lbs. (kg)</b>	45 (20)
<b>TOP &amp; SHELF</b>	Stainless steel. Shelf includes access hole for plug-in cord
<b>BACK &amp; BOTTOM</b>	Stainless steel
<b>BACKSPLASH</b>	Stainless steel 6" high (4" high optional) with 1" return at top, mechanically fastened and sealed with steel support brackets. <b>TSD Series:</b> Stainless steel rear deck.
<b>LEGS</b>	1-5/8" tubular, stainless steel with 1" adjustable thermoplastic foot.
<b>BOWL</b>	Stainless steel with sound deadening. All horizontal and vertical edges 1-3/4" radius with balled corners. Furnished with 1-1/2" stainless steel drain socket and duo-strainer. 10-5/8" x 9-5/8" x 6" deep.
<b>WATER FAUCET</b>	Chrome plated, hot and cold, goose-neck faucet. Heavy-duty all brass construction. <b>Must be ordered separately.</b> Lead free Faucet also available.
<b>PLUMBING</b>	Drain-connection- 1-1/2" NPS Male. Hot and cold water connection: <b>TS Series:</b> 3/8" O.D. copper supply tubes. <b>TSD Series:</b> 1/2" IPS shanks and nuts.
<b>ELECTRIC</b>	Duplex outlet included, but not installed.

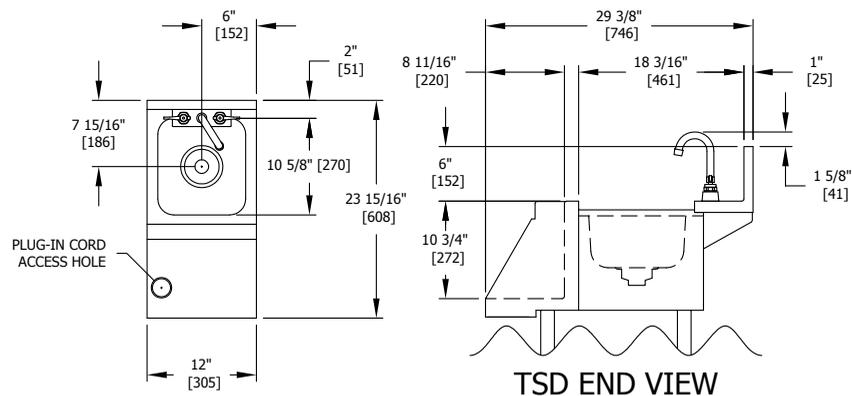

*\*Faucet shown for clarity;  
must be ordered separately*

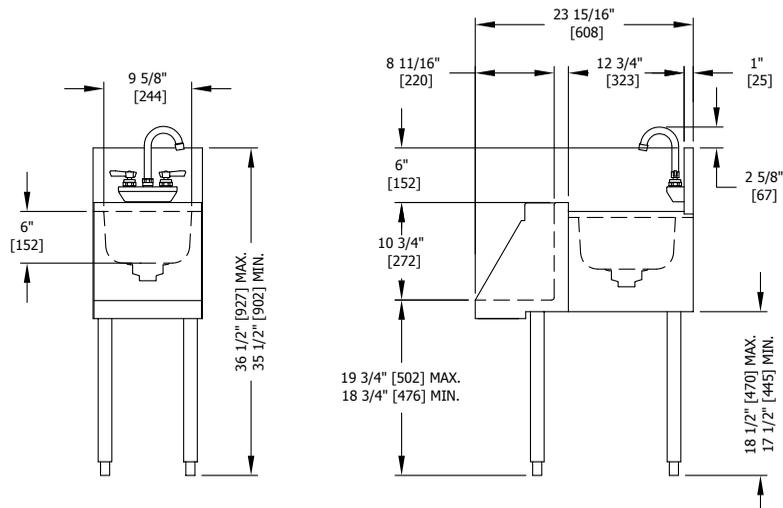

Form No. BL01  
Rev. 10.21.2016

PERLICK CORPORATION 8300 W. Good Hope Rd., Milwaukee, WI 53223 • 800.558.5592 • perlick.com

# Perlick - TS18



## Perlick - TS18

Item: 5  
Qty: 1  
Category: Underbar Fillers & Drainboards

### Plumbing

Indirect Drain  
1.5" Conn., 26" AFF

### Electrical

Remarks -

### HVAC

Remarks -

### Equipment

Remarks -

### Refrigeration

Remarks -

ACH = Above Counter Height, AFF = Above Finished Floor

# DRAINBOARDS

## TS and TSD SERIES



### Perlick Features

- Embossed stainless steel drainboard
- Screw-in legs for fast installation
- Stainless steel legs install without tools and have "Rust Free" Thermoplastic feet

### MODELS

TS Series

- TS12\*
- TS18\*
- TS24
- TS30
- TS36
- TS42
- TS48

### MODELS

TSD Series

- TSD12\*
- TSD18\*
- TSD24
- TSD30
- TSD36
- TSD42
- TSD48

*\* Available in 1" increments from 13" to 23"*



TS24



TSD24



GENERATIONS OF  
EXCELLENCE

Form No.DB01  
Rev. 01.16.2012

**Perlick**

8300 West Good Hope Road • Milwaukee, WI 53223 • Phone 414.353.7060 • Fax 414.353.7069  
Toll Free 800.558.5592 • E-Mail [perlick@perlick.com](mailto:perlick@perlick.com) • [www.perlick.com](http://www.perlick.com)


# Size and Specifications

Drainboards - TS and TSD Series



Job \_\_\_\_\_  
 Area \_\_\_\_\_  
 Item No. \_\_\_\_\_  
 Model No. \_\_\_\_\_

MODEL NOS.	TS(D)12	TS(D)18	TS(D)24	TS(D)30	TS(D)36	TS(D)42	TS(D)48
LENGTH IN. (mm)	12" (305)	18" (457)	24" (610)	30" (914)	36" (914)	42" (1067)	48" (1219)
SHIP WT. lbs. (kg)	35 (16)	40 (18)	45 (20)	50 (23)	60 (27)	90 (41)	115 (52)
FRONT & SIDES	Stainless steel						
BACKSPLASH	<b>General and TS Series:</b> Stainless steel 6" high (4" optional) with 1" return at top, mechanically fastened and sealed to top with steel support brackets <b>TSD Series:</b> Stainless steel rear deck						
BACK	Galvanized steel						
DRAINBOARD	Embossed stainless steel, 16" deep front to back. All horizontal and vertical edges 1/4" radius with ballbed corners. Underside reinforced with welded brackets. Stainless steel drain socket.						
LEGS	1-5/8" tubular, stainless steel with 1" adjustable thermoplastic foot						
PLUMBING	Drain connection- 1-1/2" NPS male						

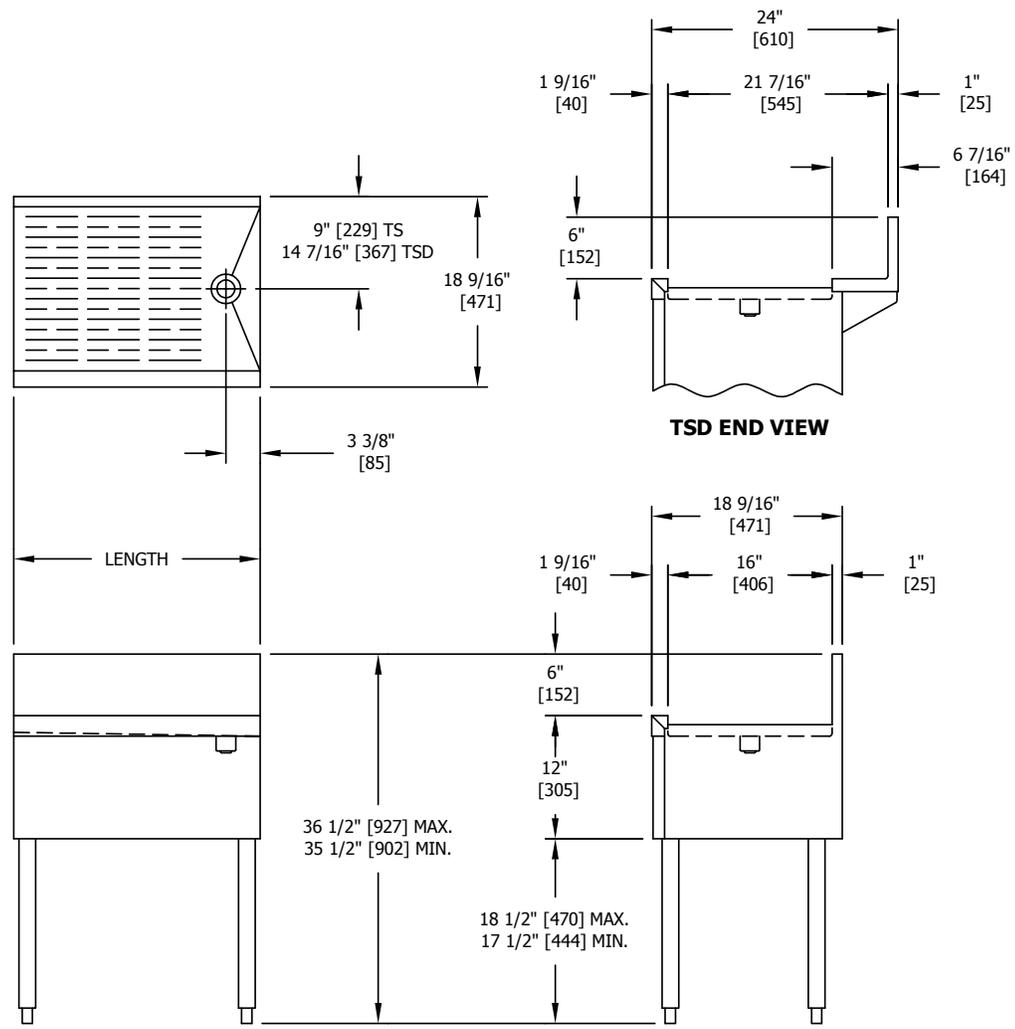

Form No. DB01  
 Rev. 01.16.2012

8300 West Good Hope Road • Milwaukee, WI 53223 • Phone 414.353.7060 • Fax 414.353.7069  
 Toll Free 800.558.5592 • E-Mail perlick@perlick.com • www.perlick.com

Perlick is committed to continuous improvement. Therefore, we reserve the right to change specifications without prior notice

## Perlick - TS24IC-EC10



### Perlick - TS24IC-EC10

Item: 7

Qty: 1

Category: Underbar Ice Chest

### Plumbing

Indirect Drain

0.5" Conn., 8" AFF

### Electrical

Remarks -

### HVAC

Remarks -

### Equipment

Remarks -

### Refrigeration

Remarks -

ACH = Above Counter Height, AFF = Above Finished Floor

## PRODUCT SPECIFICATION SHEETS ► Ice Chests


**ICE CHESTS**  
 EXTRA CAPACITY WITH COLD PLATE


*Covers sold separately*

JOB	
AREA	
ITEM NO.	
MODEL NO.	

MODELS	
TS Series	TSD Series
TS24IC-EC10	TSD24IC-EC10
TS30IC-EC10	TSD30IC-EC10
TS36IC-EC10	TSD36IC-EC10



## Features


- Dent-resistant ABS top ledge
- Stainless steel legs install without tools and have rust-free thermoplastic feet

PRODUCT SPECIFICATION SHEETS ▶ Ice Chests

**Perlick® ICE CHESTS**  
EXTRA CAPACITY WITH COLD PLATE

MODEL NOS.	TS(D)24IC-EC10	TS(D)30IC-EC10	TS(D)36IC-EC10
LENGTH, INCHES (mm)	24 (610)	30 (762)	36 (914)
ICE CAPACITY, LBS. (kg)	75 (34)	95 (43.1)	115 (52.2)
SHIP WEIGHT, LBS. (kg)	100 (45.4)	110 (49.9)	120 (54.4)
FRONT & SIDES	Stainless steel, top rim ABS		
BACKSPLASH	Stainless steel, 6" high with 1" return at top, mechanically fastened and sealed to ice chest top with steel support brackets		
BACK & BOTTOM	Galvanized steel		
INTERIOR	Stainless steel with 1/4" radius corners, welded and sealed with non-exposed cold plate. Interiors can be divided with freestanding ice dividers.		
INSULATION	Foamed-in-place polyurethane		
LEGS (optional)	1-5/8" tubular, stainless steel with 1" adjustable thermoplastic foot.		
PLUMBING	Drain connection – 1/2" NPS male		
COLD PLATE	Cast aluminum plate concealed under ice chest liner. Cold plate has two full-length circuits and 8 half-length circuits. Connections 5/16" O.D. stainless steel tubing with swaged end to accept standard 1/4" I.D. beverage tubing		
OPERATING SPECIFICATIONS	Each full circuit will deliver four 6 oz. drinks per minute at 40° continuously, or 40 oz. every three minutes in a single draw (flow rate 2 oz./sec, 75° ambient, 75° degree product)		
ACCESSORIES	Covers, bottle well and cover kits, condiment trays, soda chases		

**Note:** Covers not included.

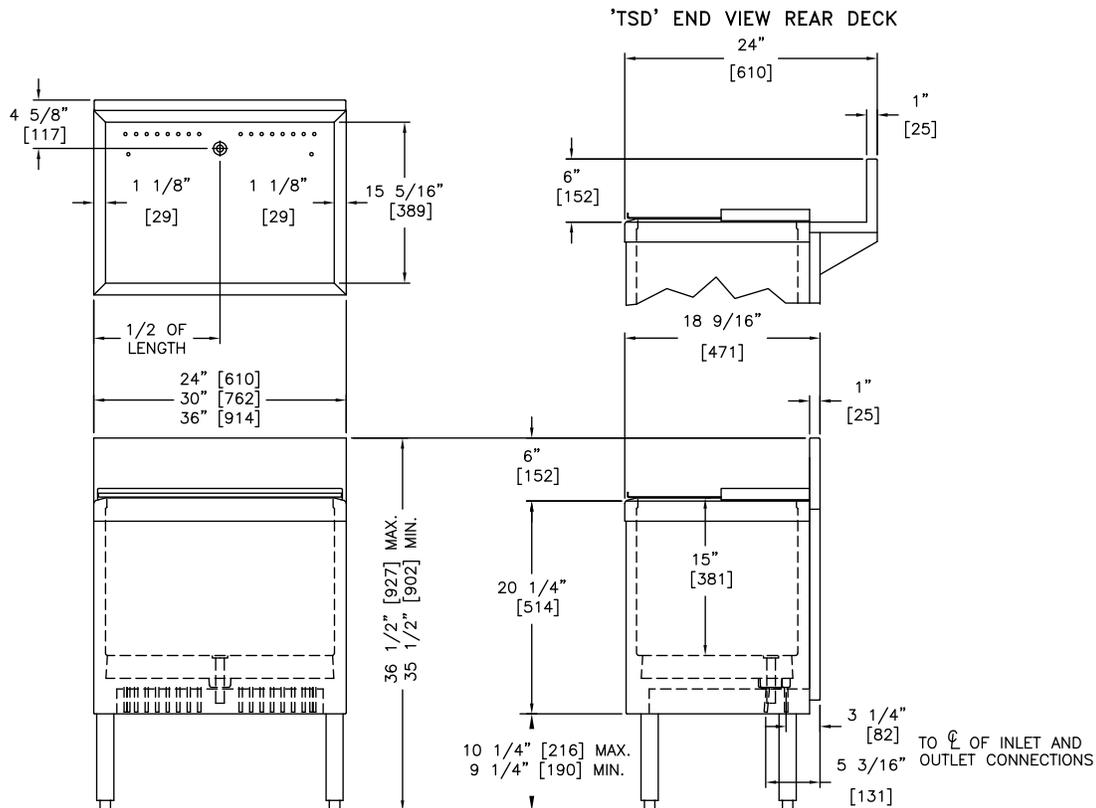

Form No. IC05-2  
Rev. 02.24.2014

PERLICK CORPORATION 8300 W. Good Hope Rd., Milwaukee, WI 53223 • 800.558.5592 • perlick.com

**Perlick - TS12LS**

Item: 8  
Qty: 1  
Category: Underbar Liquor Display

**Electrical**

Remarks -

**Plumbing**

Remarks -

**HVAC**

Remarks -

**Equipment**

Remarks -

**Refrigeration**

Remarks -




# STORAGE BINS FOR LIQUOR

## Perlick Features


- Solid stainless steel steps without gaps.

## MODEL NOS.

- TS12LS
- TS18LS
- TS24LS
- 7055A3

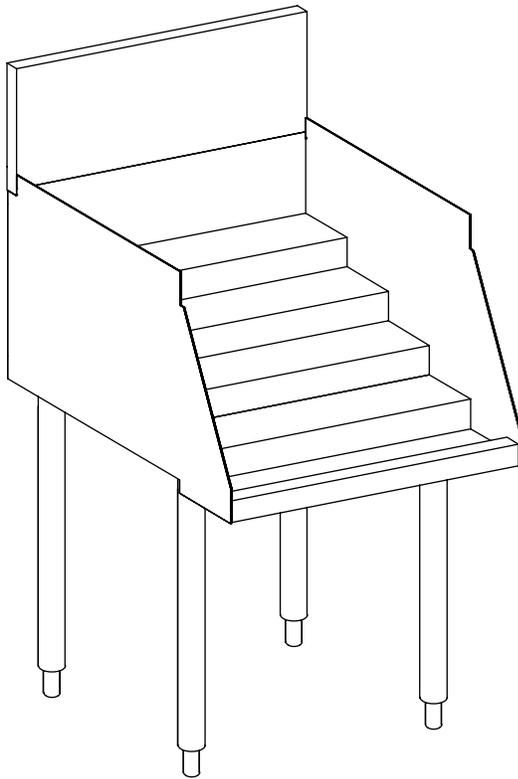

TS18LS

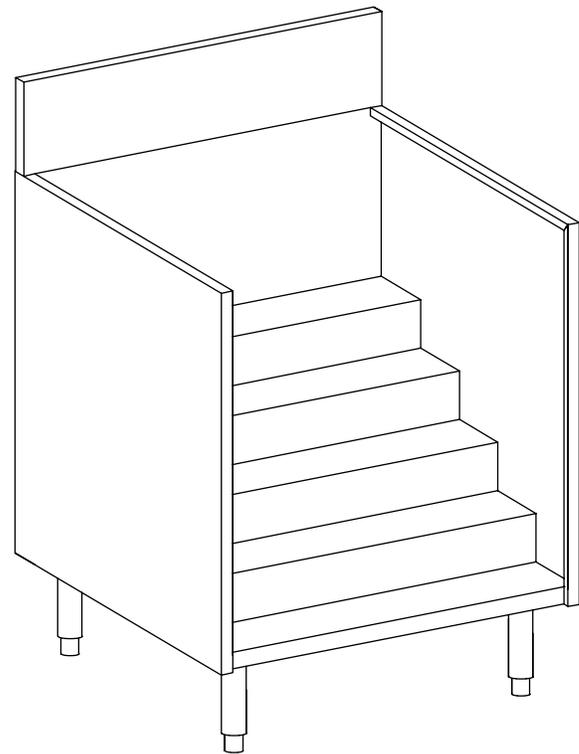

7055A3



8300 West Good Hope Road • Milwaukee, WI 53223 • Phone 414-353-7060 • Fax 414-353-7069  
Toll Free 800-558-5592 • E-Mail: [Perlick@Perlick.com](mailto:Perlick@Perlick.com) • [www.Perlick.com](http://www.Perlick.com)



Form No. SB02  
Rev. 03.30.09



# Sizes and Specifications Storage Bins for Liquor

Job \_\_\_\_\_  
 Area \_\_\_\_\_  
 Item No. \_\_\_\_\_  
 Model No. \_\_\_\_\_

MODEL NOS.	TS12LS	TS18LS	TS24LS	7055A3
Length Ins. (mm)	12" (305)	18" (457)	24" (610)	24" (610)
Ship wt lbs. (kg)	30 (14)	35 (16)	40 (18)	40 (18)
general PARTS	Stainless steel.			
Backsplash	Stainless steel 6" high (4" high optional) with 1" return at top, mechanically fastened and sealed with steel support brackets.			
Legs	<b>Models TS12LS, TS18LS and TS24LS:</b> 1 <sup>5</sup> / <sub>8</sub> " tubular, stainless steel with 1" adjustable thermo-plastic foot. <b>Model 7055A3:</b> 1 <sup>5</sup> / <sub>8</sub> " tubular, stainless steel with 1" adjustable stainless steel foot.			

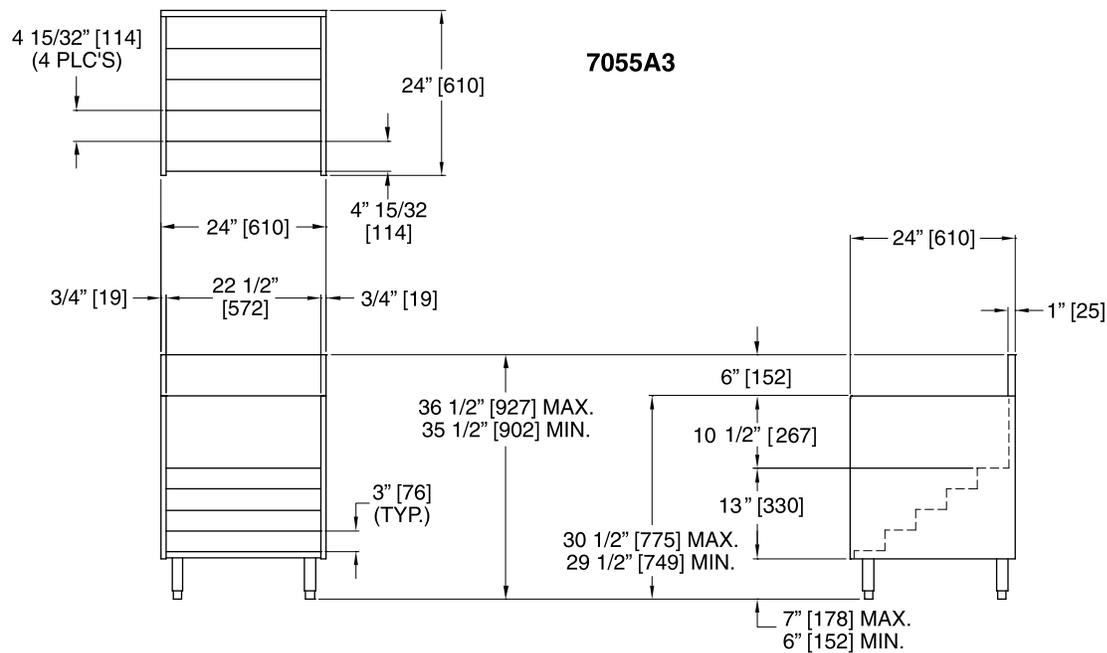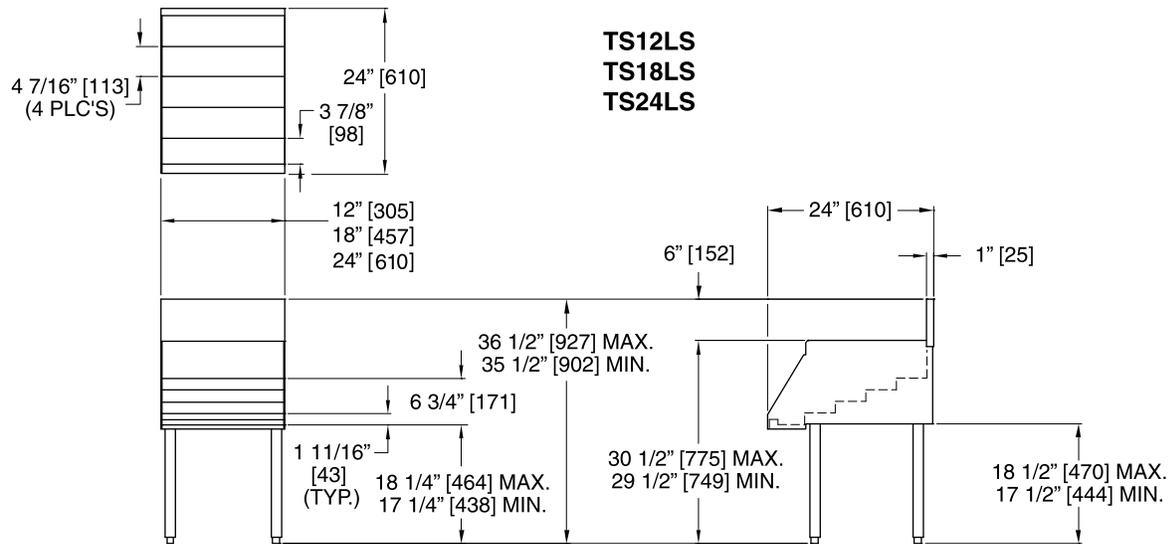

8300 West Good Hope Road • Milwaukee, WI 53223 • Phone 414-353-7060 • Fax 414-353-7069  
 Toll Free 800-558-5592 • E-Mail: Perlick@Perlick.com • www.Perlick.com

Perlick is committed to continuous improvement.  
 Therefore, we reserve the right to change specifications without prior notice.

Form No. SB02  
 Rev. 03.30.09

## Perlick - TS12HSN



### Perlick - TS12HSN

Item: 9

Qty: 1

Category: Underbar Handsink

### Plumbing

Hot Water

0.375" Conn., 13" AFF

Cold Water

0.375" Conn., 13" AFF

Indirect Drain

1.5" Conn., 17" AFF

### Electrical

Remarks -

### HVAC

Remarks -

### Equipment

Remarks -

### Refrigeration

Remarks -

ACH = Above Counter Height, AFF = Above Finished Floor

## PRODUCT SPECIFICATION SHEETS ► Underbar Sinks


**UNDERBAR SINKS**  
**SINGLE TANK/STAINLESS STEEL BOWL**


JOB	
AREA	
ITEM NO.	
MODEL NO.	

<b>MODELS</b>
<b>TS Series</b>
TS12HSN



C US  
 ASME A112.19.3/CSA B45.4  
 NSF/ANSI 2

## Features

- Deep drawn stainless steel bowl
- NSF listed, commercial grade hot/cold water faucet (must be ordered separately)
- 16 oz. pump soap dispenser
- Underside is sound-deadening
- Stainless steel legs install without tools and have rust-free thermoplastic feet


Form No. SK07  
 Rev. 10.21.2016

**PERLICK CORPORATION** 8300 W. Good Hope Rd., Milwaukee, WI 53223 • 800.558.5592 • perlick.com

## PRODUCT SPECIFICATION SHEETS ► Underbar Sinks


**UNDERBAR SINKS**  
**SINGLE TANK/STAINLESS STEEL BOWL**

<b>MODEL NO.</b>	<b>TS12HSN</b>
<b>LENGTH, INCHES (mm)</b>	12 (305)
<b>SHIP WEIGHT, LBS. (kg)</b>	50 (23)
<b>TOP &amp; SIDES</b>	Stainless steel
<b>BACK &amp; BOTTOM</b>	Stainless steel
<b>BACKSPLASH</b>	Stainless steel 6" high (4" high optional) with 1" return at the top, mechanically fastened and sealed to hand sink top with steel support brackets
<b>LEGS</b>	1-5/8" tubular, stainless steel with 1" adjustable thermoplastic feet
<b>BOWL</b>	Stainless steel, 10"x14"x9-1/4" deep. All horizontal and vertical edges 1-1/2" radius with balled corners. Furnished with 1-1/2" stainless steel drain socket. 8-1/2" standpipe. Sound deadening underside.
<b>WATER FAUCET</b>	Hot and cold, heavy-duty all brass construction, chrome plated goose neck swing spout faucet. <b>Must be ordered separately.</b> Lead-free faucet also available.
<b>PLUMBING</b>	Drain connection: 1-1/2" NPS male. Hot and cold water connection

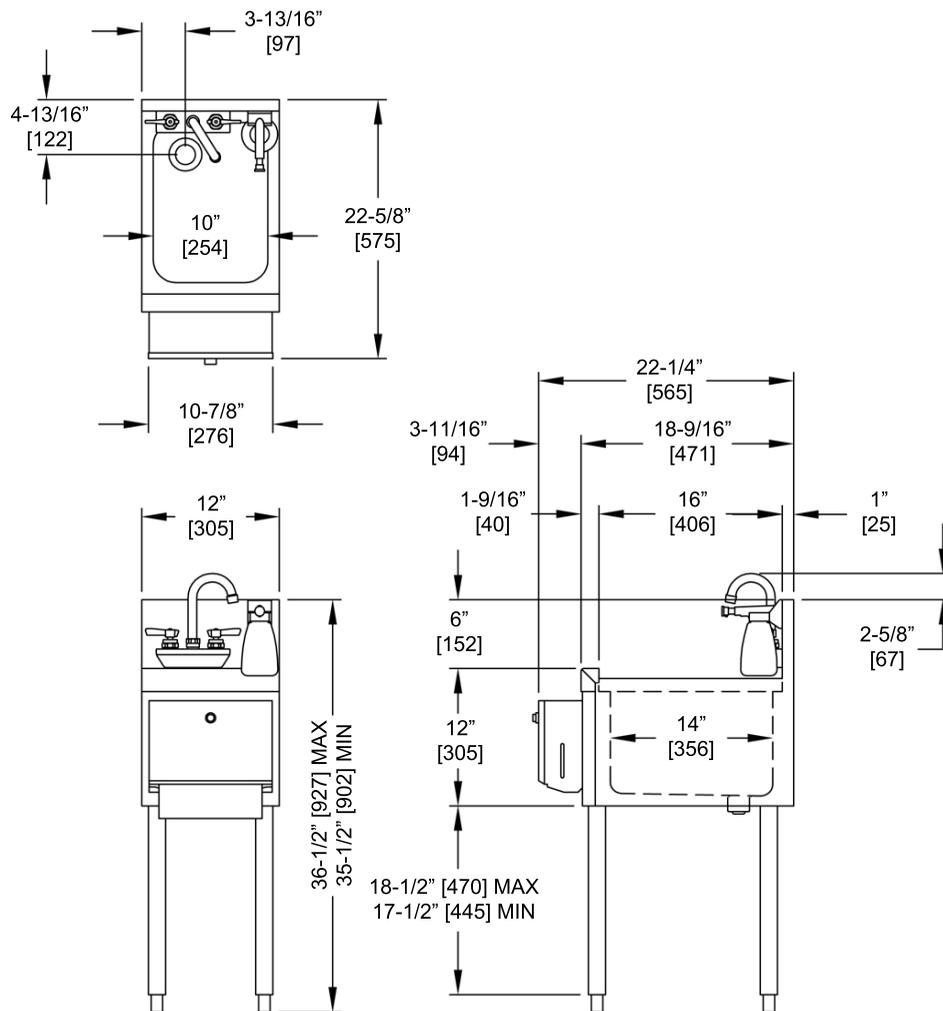

Faucet shown for clarity. Must be ordered separately.

Form No. SK07  
Rev. 10.21.2016

PERLICK CORPORATION 8300 W. Good Hope Rd., Milwaukee, WI 53223 • 800.558.5592 • perlick.com

## Perlick - TS53C



### Perlick - TS53C

Item: 10

Qty: 1

Category: Underbar Sink

### Plumbing

Hot Water

0.375" Conn., 13" AFF

Cold Water

0.375" Conn., 13" AFF

Indirect Drain (1)

1.5" Conn., 26" AFF

Indirect Drain (2)

1.5" Conn., 17" AFF

Indirect Drain (3)

1.5" Conn., 17" AFF

### Electrical

Remarks -

### HVAC

Remarks -

### Equipment

Remarks -

### Refrigeration

Remarks -

ACH = Above Counter Height, AFF = Above Finished Floor

**PRODUCT SPECIFICATION SHEETS** ▶ Underbar Sinks


**UNDERBAR SINKS**  
**THREE TANK, STAINLESS STEEL BOWL**


JOB	
AREA	
ITEM NO.	
MODEL NO.	

MODELS	
TS Series	TSD Series
TS33C	TSD33C
TS43R	TSD43R
TS43L	TSD43L
TS53C	TSD53C
TS63C	TSD63C
TS73C	TSD73C
TS83C	TSD83C



C US

 ASME A112.19.3/CSA B45.4  
 NSF/ANSI 2

**Features**

- Deep drawn stainless steel bowls
- NSF listed, commercial grade hot/cold water faucet (must be ordered separately)
- Embossed stainless steel drainboard
- Underside is sound-deadening
- Stainless steel legs install without tools and have rust-free thermoplastic feet


 Form No. SK04  
 Rev. 10.21.2016

**PERLICK CORPORATION** 8300 W. Good Hope Rd., Milwaukee, WI 53223 • 800.558.5592 • perlick.com

## PRODUCT SPECIFICATION SHEETS ► Underbar Sinks


**UNDERBAR SINKS**  
**THREE TANK, STAINLESS STEEL BOWL**

MODEL NOS.	TS(D)33C	TS(D)43R	TS(D)43L	TS(D)53C	TS(D)63C	TS(D)73C	TS(D)83C
LENGTH, INCHES (mm)	36 (914)	48 (1219)	48 (1219)	60 (1524)	72 (1829)	84 (2134)	96 (2438)
SHIP WEIGHT, LBS. (kg)	95 (43)	115 (52)	115 (52)	125 (57)	145 (66)	160 (73)	195 (88)
DRAINBOARD LOCATIONS	N/A	Left	Right	Left/Right	Left/Right	Left/Right	Left/Right
DRAINBOARD LENGTHS, INCHES (mm)	N/A	12 (305)/NA	NA/12 (305)	12 (305) each side	18 (458) each side	24 (610) each side	30 (762) each side
FRONT & SIDES	Stainless steel						
BACK & BOTTOM	Stainless steel						
BACKSPLASH	Stainless steel 6" high (4" high optional) with 1" return at the top, mechanically fastened and sealed to hand sink top with steel support brackets <b>TSD Series:</b> Stainless steel rear deck						
LEGS	1-5/8" tubular, stainless steel with 1" adjustable thermoplastic feet						
DRAINBOARD	Embossed stainless steel, 16" deep front to back with 1-1/2" stainless steel drain socket. All horizontal and vertical edges 1/4" radius with balled corners. Sound deadening underside reinforced with welded brackets.						
BOWLS	Stainless steel, 10"x14"x9-1/4" deep. All horizontal and vertical edges 1-1/2" radius with balled corners. Furnished with 1-1/2" stainless steel drain socket. 8-1/2" standpipe.						
WATER FAUCET	Hot and cold, heavy-duty all brass construction, chrome plated 10" swing spout faucet. <b>Must be ordered separately.</b>						
PLUMBING	Drain connection: 1-1/2" NPS male. Hot and cold water connection <b>TS Series:</b> 3/8" copper supply tubes <b>TSD Series:</b> 1/2" IPS shanks and nuts						
OPTIONAL ACCESSORIES	Wall faucet with 10" swing spout, also available lead-free; deck faucet with 10" swing spout, also available lead-free, drain connection kit, wet waste pan (drains into standpipe)						

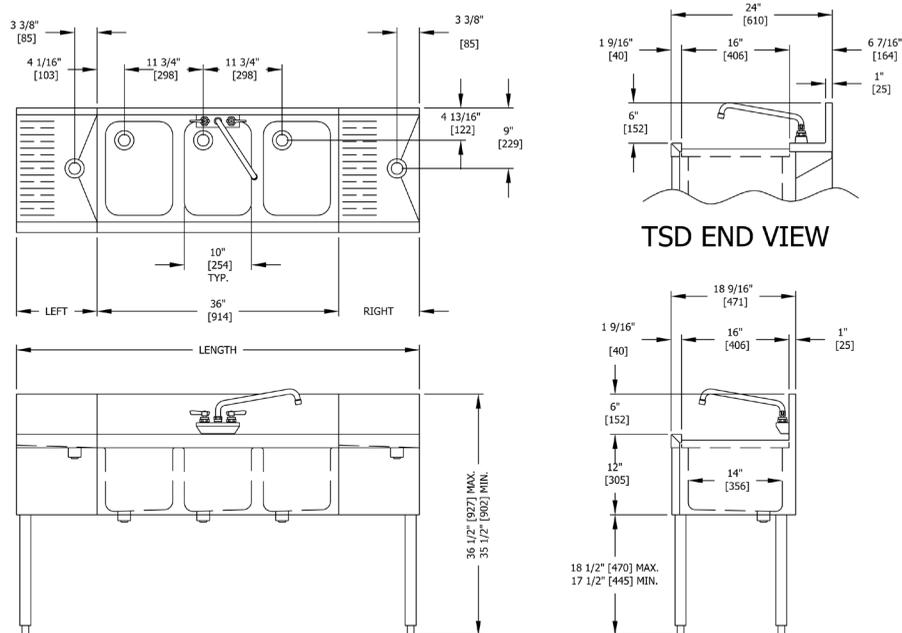

Faucet shown for clarity. **Must be ordered separately.**

Form No. SK04  
Rev. 10.21.2016

PERLICK CORPORATION 8300 W. Good Hope Rd., Milwaukee, WI 53223 • 800.558.5592 • perlick.com

## Perlick - TS24IC-EC10



### Perlick - TS24IC-EC10

Item: 11

Qty: 1

Category: Underbar Ice Chest

### Plumbing

Indirect Drain

0.5" Conn., 8" AFF

### Electrical

Remarks -

### HVAC

Remarks -

### Equipment

Remarks -

### Refrigeration

Remarks -

ACH = Above Counter Height, AFF = Above Finished Floor

## PRODUCT SPECIFICATION SHEETS ► Ice Chests


**ICE CHESTS**  
 EXTRA CAPACITY WITH COLD PLATE


*Covers sold separately*

JOB	
AREA	
ITEM NO.	
MODEL NO.	

MODELS	
TS Series	TSD Series
TS24IC-EC10	TSD24IC-EC10
TS30IC-EC10	TSD30IC-EC10
TS36IC-EC10	TSD36IC-EC10



## Features


- Dent-resistant ABS top ledge
- Stainless steel legs install without tools and have rust-free thermoplastic feet

## PRODUCT SPECIFICATION SHEETS ► Ice Chests


**ICE CHESTS**  
 EXTRA CAPACITY WITH COLD PLATE

MODEL NOS.	TS(D)24IC-EC10	TS(D)30IC-EC10	TS(D)36IC-EC10
LENGTH, INCHES (mm)	24 (610)	30 (762)	36 (914)
ICE CAPACITY, LBS. (kg)	75 (34)	95 (43.1)	115 (52.2)
SHIP WEIGHT, LBS. (kg)	100 (45.4)	110 (49.9)	120 (54.4)
FRONT & SIDES	Stainless steel, top rim ABS		
BACKSPLASH	Stainless steel, 6" high with 1" return at top, mechanically fastened and sealed to ice chest top with steel support brackets		
BACK & BOTTOM	Galvanized steel		
INTERIOR	Stainless steel with 1/4" radius corners, welded and sealed with non-exposed cold plate. Interiors can be divided with freestanding ice dividers.		
INSULATION	Foamed-in-place polyurethane		
LEGS (optional)	1-5/8" tubular, stainless steel with 1" adjustable thermoplastic foot.		
PLUMBING	Drain connection – 1/2" NPS male		
COLD PLATE	Cast aluminum plate concealed under ice chest liner. Cold plate has two full-length circuits and 8 half-length circuits. Connections 5/16" O.D. stainless steel tubing with swaged end to accept standard 1/4" I.D. beverage tubing		
OPERATING SPECIFICATIONS	Each full circuit will deliver four 6 oz. drinks per minute at 40° continuously, or 40 oz. every three minutes in a single draw (flow rate 2 oz./sec, 75° ambient, 75° degree product)		
ACCESSORIES	Covers, bottle well and cover kits, condiment trays, soda chases		

**Note:** Covers not included.

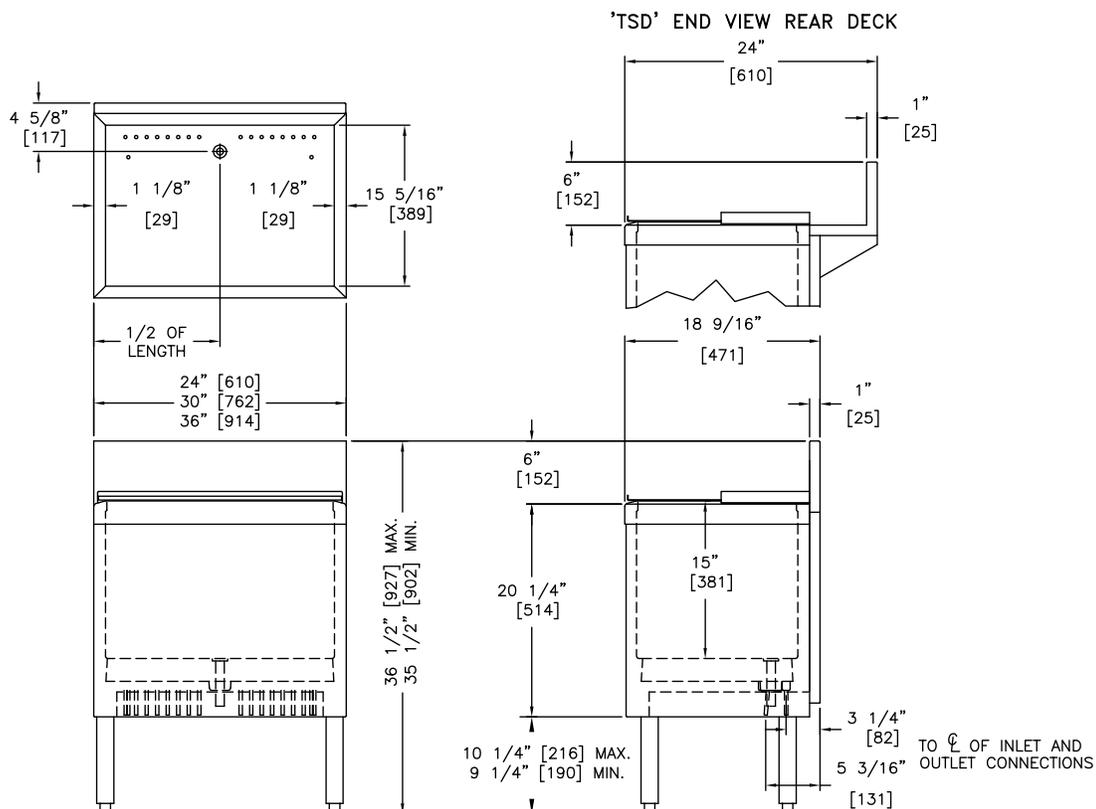

Form No. IC05-2  
Rev. 02.24.2014

PERLICK CORPORATION 8300 W. Good Hope Rd., Milwaukee, WI 53223 • 800.558.5592 • perlick.com

**Perlick - TS24LS**

Item: 13

Qty: 1

Category: Underbar Liquor Display

**Electrical**

Remarks -

**Plumbing**

Remarks -

**HVAC**

Remarks -

**Equipment**

Remarks -

**Refrigeration**

Remarks -




# STORAGE BINS FOR LIQUOR

## Perlick Features


- Solid stainless steel steps without gaps.

## MODEL NOS.

- TS12LS
- TS18LS
- TS24LS
- 7055A3

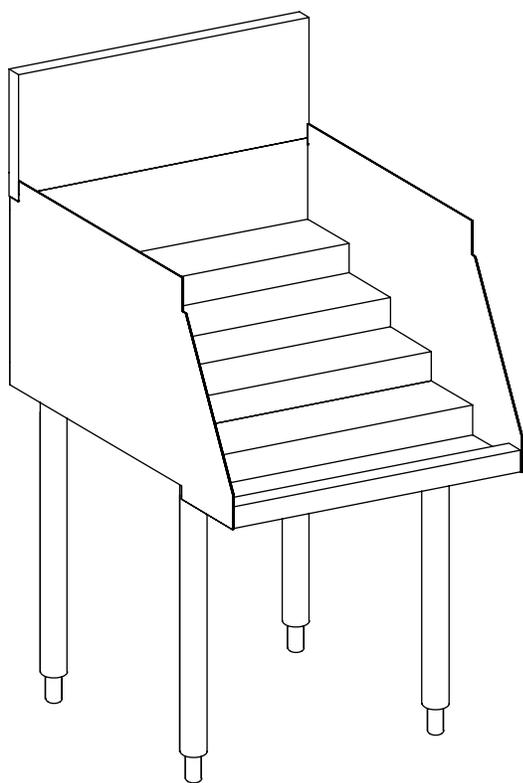

TS18LS

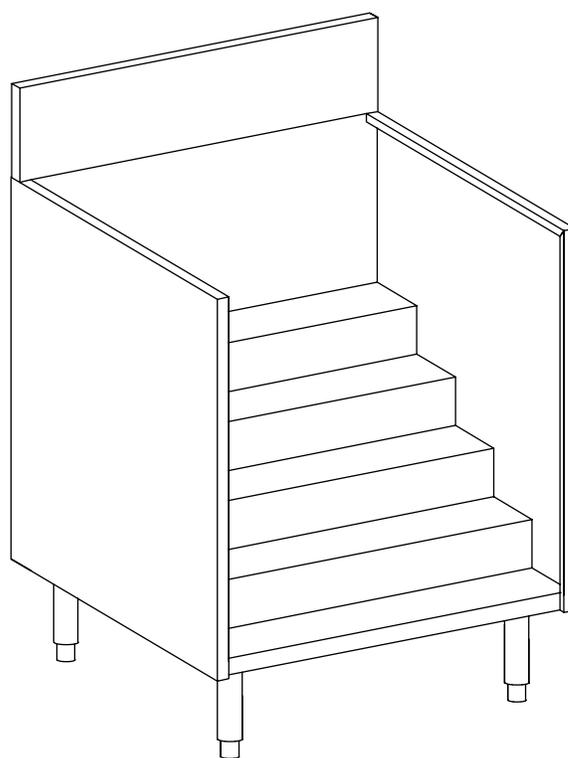

7055A3



8300 West Good Hope Road • Milwaukee, WI 53223 • Phone 414-353-7060 • Fax 414-353-7069  
Toll Free 800-558-5592 • E-Mail: [Perlick@Perlick.com](mailto:Perlick@Perlick.com) • [www.Perlick.com](http://www.Perlick.com)



Form No. SB02  
Rev. 03.30.09



# Sizes and Specifications Storage Bins for Liquor

Job \_\_\_\_\_  
 Area \_\_\_\_\_  
 Item No. \_\_\_\_\_  
 Model No. \_\_\_\_\_

MODEL NOS.	TS12LS	TS18LS	TS24LS	7055A3
Length Ins. (mm)	12" (305)	18" (457)	24" (610)	24" (610)
Ship wt lbs. (kg)	30 (14)	35 (16)	40 (18)	40 (18)
general PARTS	Stainless steel.			
Backsplash	Stainless steel 6" high (4" high optional) with 1" return at top, mechanically fastened and sealed with steel support brackets.			
Legs	<b>Models TS12LS, TS18LS and TS24LS:</b> 1 <sup>5</sup> / <sub>8</sub> " tubular, stainless steel with 1" adjustable thermo-plastic foot. <b>Model 7055A3:</b> 1 <sup>5</sup> / <sub>8</sub> " tubular, stainless steel with 1" adjustable stainless steel foot.			

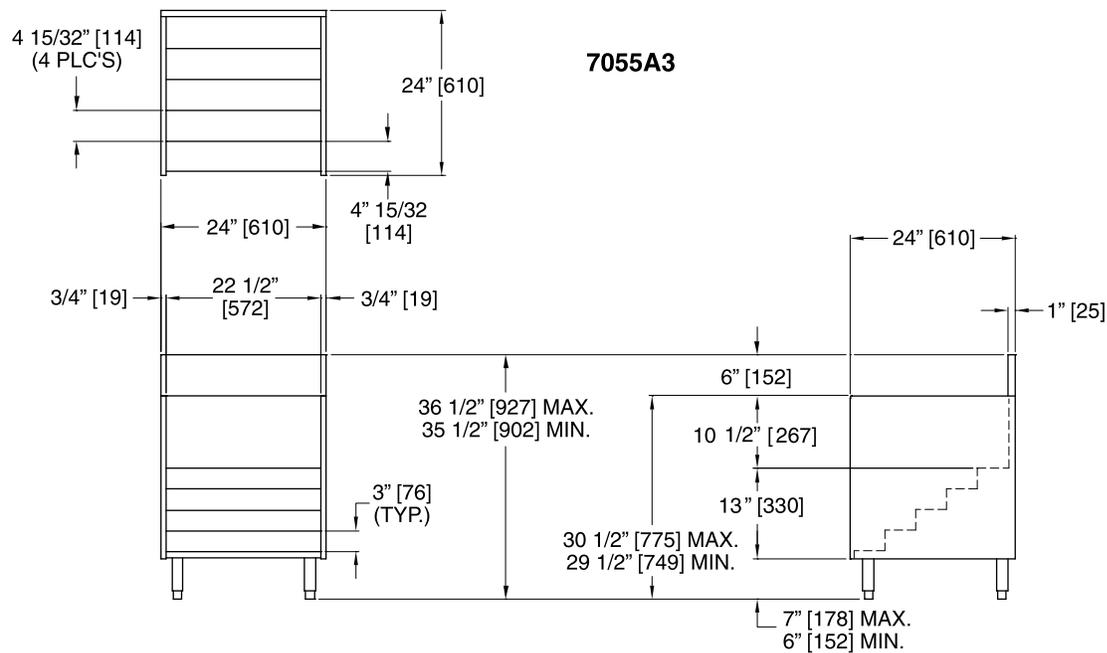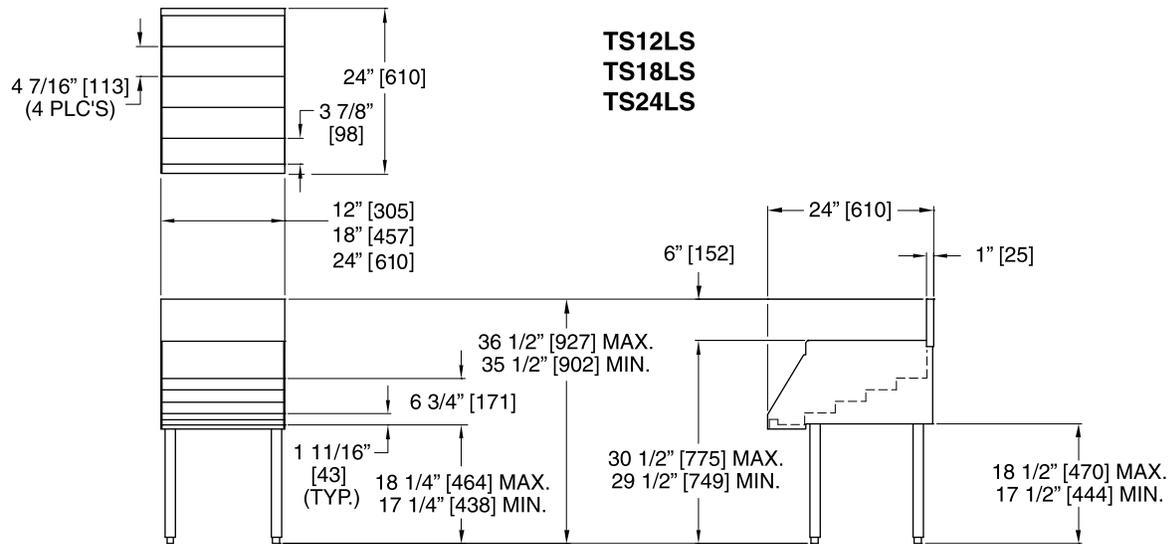

8300 West Good Hope Road • Milwaukee, WI 53223 • Phone 414-353-7060 • Fax 414-353-7069  
 Toll Free 800-558-5592 • E-Mail: Perlick@Perlick.com • www.Perlick.com

Perlick is committed to continuous improvement.  
 Therefore, we reserve the right to change specifications without prior notice.

Form No. SB02  
 Rev. 03.30.09

## Perlick - TS14BLW



### Perlick - TS14BLW

Item: 14

Qty: 1

Category: Underbar Blender Station

### Plumbing

Hot Water

0.375" Conn., 13" AFF

Cold Water

0.375" Conn., 13" AFF

Indirect Drain

1.5" Conn., 21" AFF

### Electrical

Remarks -

### HVAC

Remarks -

### Equipment

Remarks -

### Refrigeration

Remarks -

ACH = Above Counter Height, AFF = Above Finished Floor

**PRODUCT SPECIFICATION SHEETS** ▶ Underbar Sinks


**UNDERBAR SINKS**  
**14" BLENDER STATION WITH SINK**


JOB	
AREA	
ITEM NO.	
MODEL NO.	

MODELS	
TS Series	TSD Series
TS14BLW	TSD14BLW



C US  
 ASME A112.19.3/CSA B45.4  
 NSF/ANSI 2

**Perlick Features**

- Deep drawn stainless steel bowl.
- NSF listed, commercial grade hot/cold water faucet (must be ordered separately).
- Underside is sound-deadened.
- Convenient front-mounted shelf with access hole for electrical cord.
- Stainless steel legs install without tools and have "Rust Free" Thermoplastic feet.


Form No. BL02  
 Rev. 10.21.2016

**PERLICK CORPORATION** 8300 W. Good Hope Rd., Milwaukee, WI 53223 • 800.558.5592 • perlick.com


## PRODUCT SPECIFICATION SHEETS ► Underbar Sinks


**UNDERBAR SINKS**  
**14" BLENDER STATION WITH SINK**

MODEL NOS.	TS(D)14BLW
LENGTH IN. (mm)	14" (356)
SHIP WT. lbs. (kg)	55 (25)
TOP & SHELF	Stainless steel. Shelf includes access hole for plug-in cord
BACK & BOTTOM	Stainless steel
BACKSPLASH	Stainless steel 6" high (4" high optional) with 1" return at top, mechanically fastened and sealed with steel support brackets. <b>TSD Series:</b> Stainless steel rear deck.
LEGS	1-5/8" tubular, stainless steel with 1" adjustable thermoplastic foot.
BOWL	Stainless steel with sound deadening. All horizontal and vertical edges 1-3/4" radius with balled corners. Furnished with 1-1/2" stainless steel drain socket and duo-strainer. 10-5/8" x 9-5/8" x 6" deep.
WATER FAUCET	Chrome plated, hot and cold, goose-neck faucet. Heavy-duty all brass construction. <b>Must be ordered separately.</b> Lead free faucet also available.
PLUMBING	Drain-connection- 1-1/2" NPS Male. Hot and cold water connection: <b>TS Series:</b> 3/8" O.D. copper supply tubes. <b>TSD Series:</b> 1/2" IPS shanks and nuts.
ELECTRIC	Duplex outlet included, but not installed.

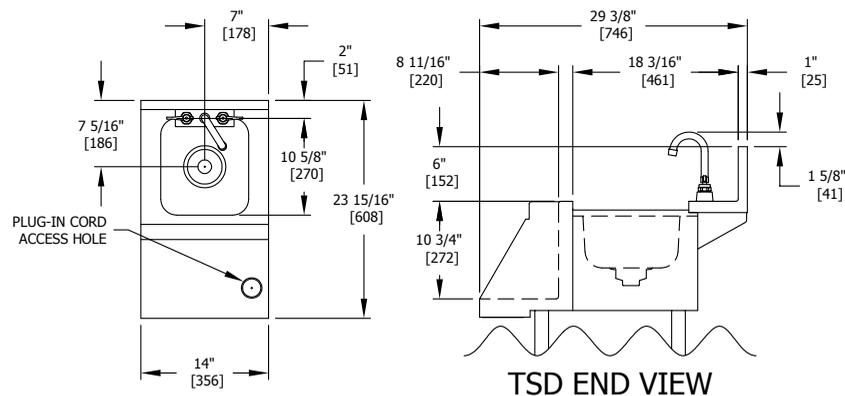

*\*Faucet shown for clarity;  
must be ordered separately*

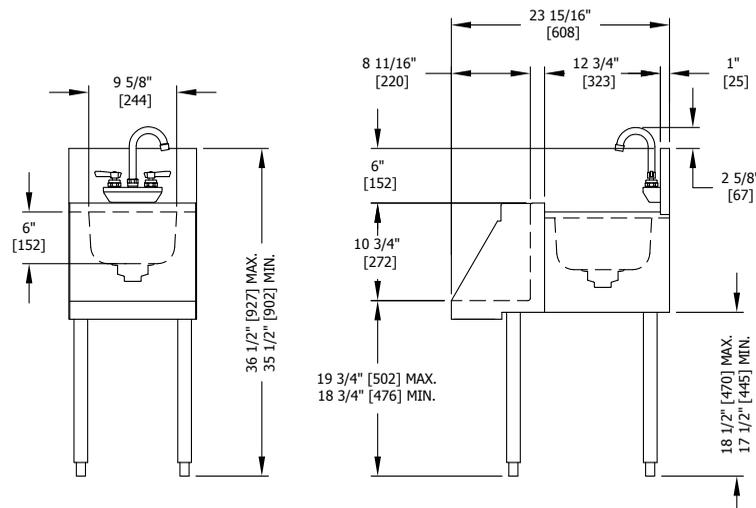

Form No. BL02  
Rev. 10.21.2016

PERLICK CORPORATION 8300 W. Good Hope Rd., Milwaukee, WI 53223 • 800.558.5592 • perlick.com

**Perlick - MBV05**

Item: 15

Qty: 1

Category: Underbar Modular Bar Die

**Electrical**

Remarks -

**Plumbing**

Remarks -

**HVAC**

Remarks -

**Equipment**

Remarks -

**Refrigeration**

Remarks -


# MODULAR BAR SYSTEM

## Perlick Features

- Pre-engineered sections up to 8½ feet assures exact fit, eliminates on-site adjustments.
- All metal construction conceals beverage and utility lines.
- Interior finish panel is adjustable for sealing to the floor.
- Set-in-place beverage line chase eliminates damage to insulated beverage lines.
- Bar front panels are easily removed for quick access to all utilities and beverage lines.
- Bar top and front panels can be prefabricated to reduce on-site millwork costs.
- Factory-installed faucets and drain sockets.
- Optional electrical outlets and fluorescent lighting.

## MODEL NOS.

MBS Style

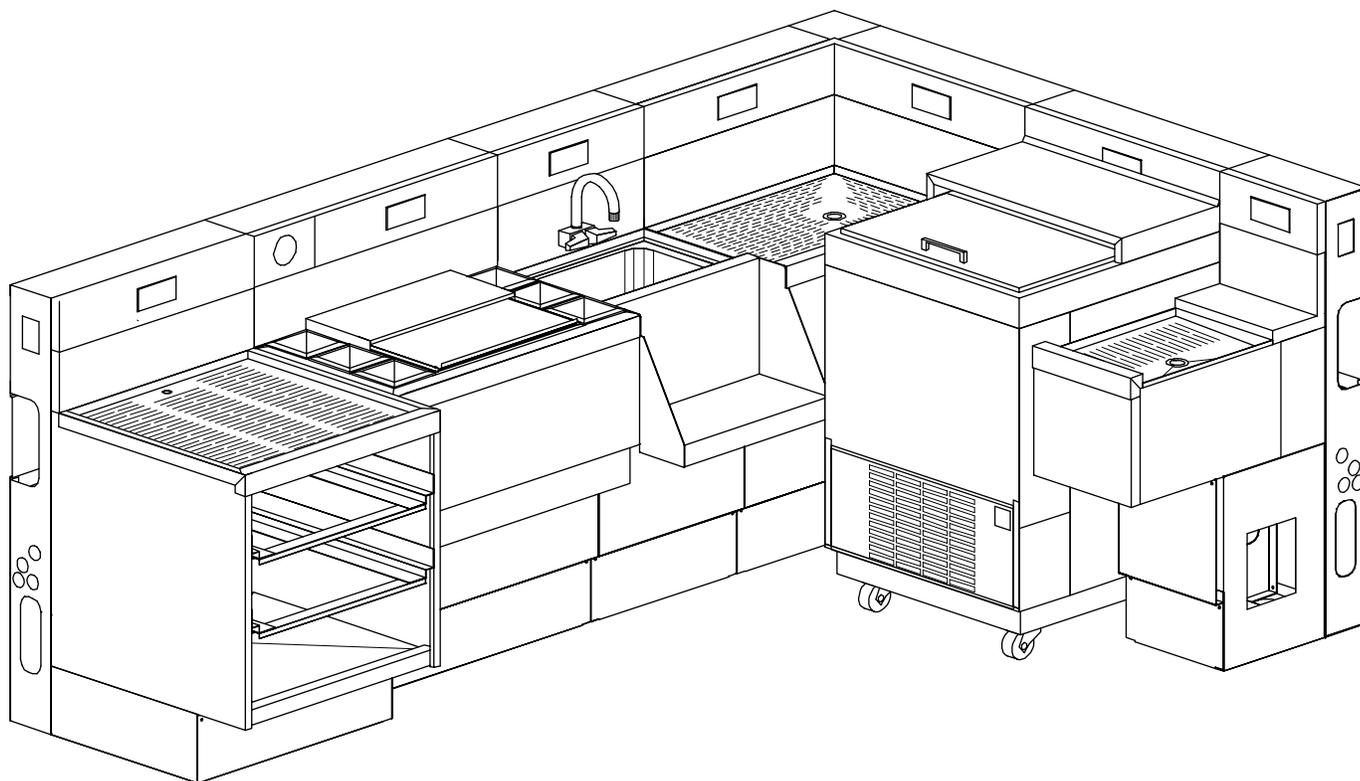

8300 West Good Hope Road • Milwaukee, WI 53223 • Phone 414-353-7060 • Fax 414-353-7069  
Toll Free 800-558-5592 • E-Mail: [Perlick@Perlick.com](mailto:Perlick@Perlick.com) • [www.Perlick.com](http://www.Perlick.com)

# Sizes and Specifications Modular Bar System


Job \_\_\_\_\_

Area \_\_\_\_\_


Item No. \_\_\_\_\_

Model No. \_\_\_\_\_



MODEL NOS.	MBS	
GENERAL	Structure:	Configured to the exact size and shape of underbar equipment, freestanding cabinets and openings, as specified.
	Chase:	An 8" x 3 1/2" beverage line chase runs the entire length of structure to include corners.
	Millwork:	By others
MECHANICAL	Utility Lines:	Dedicated chase locations for hot/cold water supply lines, beverage line conduits, and electrical conduit (accessible from customer's side of the bar.) This chase is accessible from the floor and runs the entire length of the bar.
	Floor Drains:	Locate floor drains directly below workboard equipment. The number of floor drains will vary depending on the bar layout and local codes.
UTILITY	Utilities:	A five inch (5") bar die behind the equipment, provides room for trunk lines, soda lines, plumbing, electrical, etc. to travel vertically or horizontally within the bar structure. Connections can be made from the front of the bar when panels are removed.
	Plumbing and Electrical	All water service and waste connections can be made from the customer's side of the bar (decorative front panel removed). Local codes dictate installation (by others). All electrical requirements such as receptacle to blenders, washers, coolers, soda guns, lights, etc. are by others. Plug-in fluorescent lighting is optional. <b>Note: All Plumbing and Electrical must be installed in compliance with local codes.</b>
	Electrical Cutouts	Electrical cutouts with solid cover included in top filler strip of each section. One cutout included in sections up to 30". Sections over 30" include two cutouts
MODULAR DESCRIPTION	Cabinet Base	Cabinet-style bases are used for underbar equipment which is typically mounted on 6" legs. It is not advisable to locate stub-ups under cabinet bases.
	Pedestal Base	Pedestal bases are used for equipment which is normally mounted on 18" legs. <b>Note: Plumbing and Electrical stub-ups should be located underneath pedestal bases.</b>
	Flat Wall	Flat walls are placed in sections where free-standing equipment will be located or to create an open space.

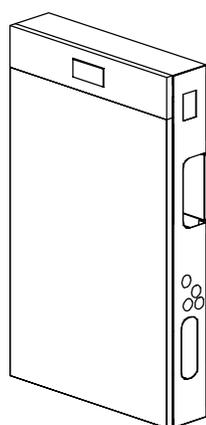

FLAT WALL

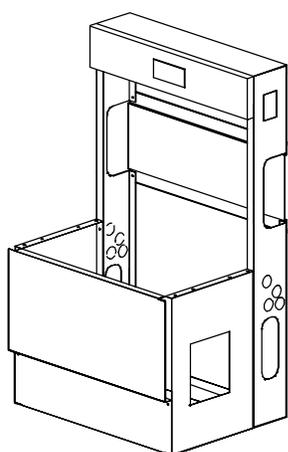

PEDESTAL BASE

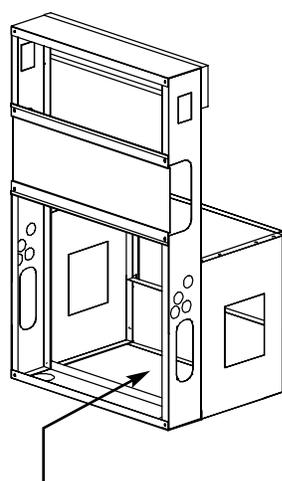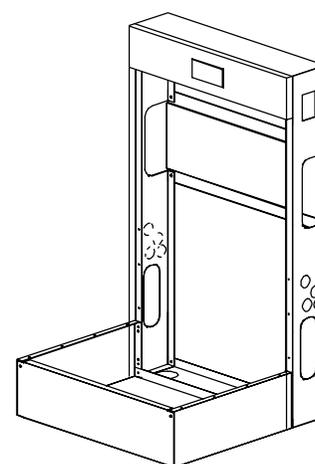STUB-UP LOCATION  
IN PEDESTAL BASE


CABINET BASE




8300 West Good Hope Road • Milwaukee, WI 53223 • Phone 414-353-7060 • Fax 414-353-7069  
Toll Free 800-558-5592 • E-Mail: Perlick@Perlick.com • www.Perlick.com

Perlick is committed to continuous improvement. Therefore, we reserve the right to change specifications without prior notice.


# Sizes and Specifications Modular Bar End Views

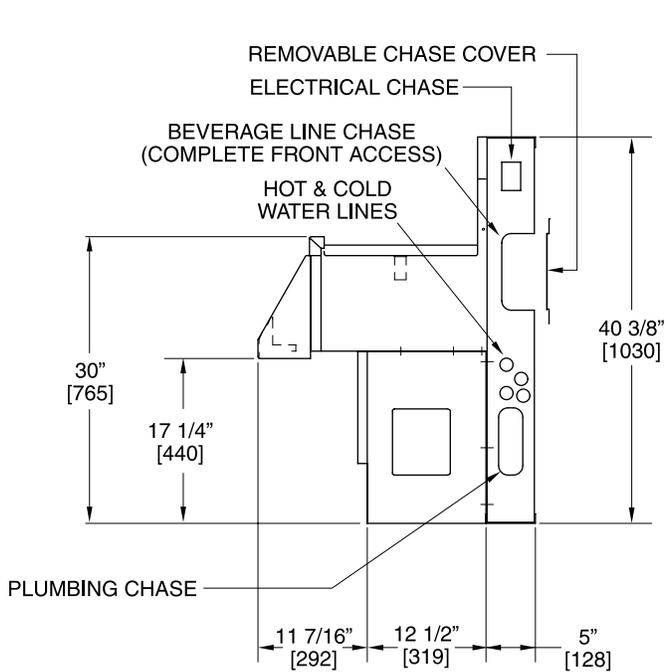

**PEDESTAL BASE END VIEW**

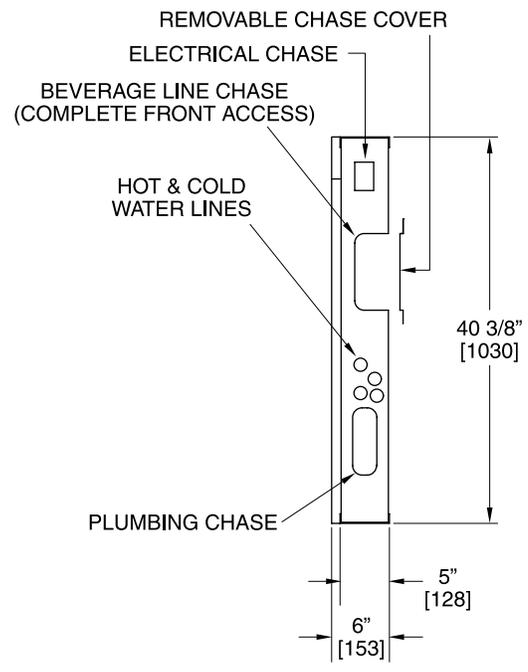

**FLAT WALL END VIEW**

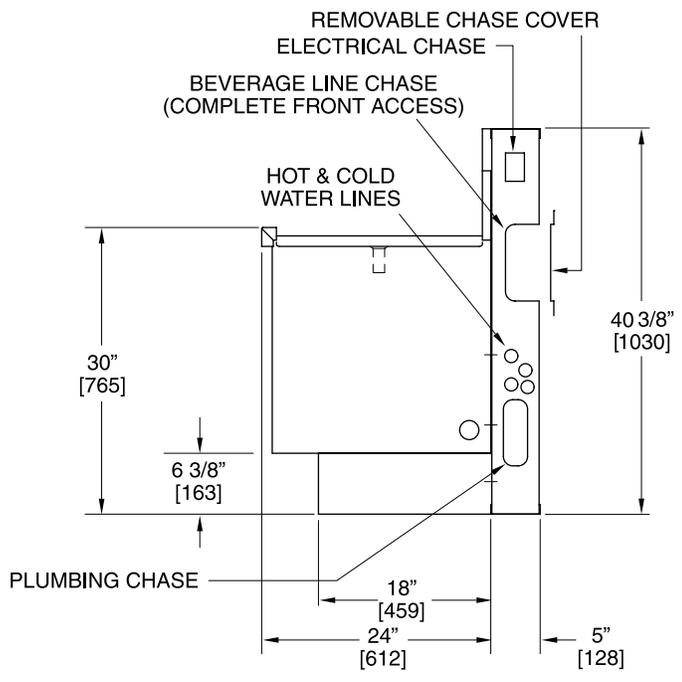



**CABINET BASE END VIEW**




8300 West Good Hope Road • Milwaukee, WI 53223 • Phone 414-353-7060 • Fax 414-353-7069  
Toll Free 800-558-5592 • E-Mail: Perlick@Perlick.com • www.Perlick.com

Perlick is committed to continuous improvement. Therefore, we reserve the right to change specifications without prior notice.



# Sizes and Specifications Floor Sink Location

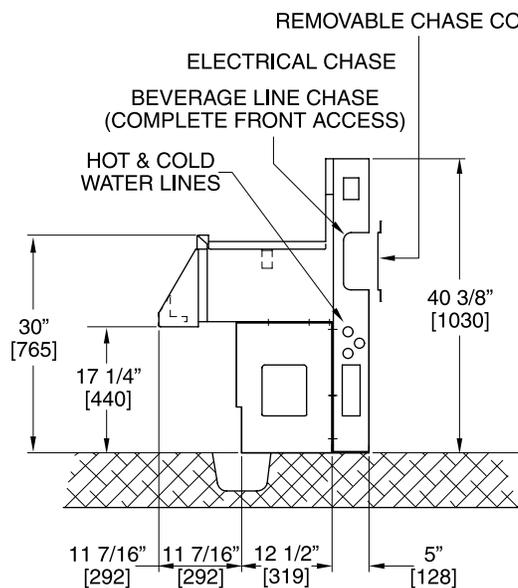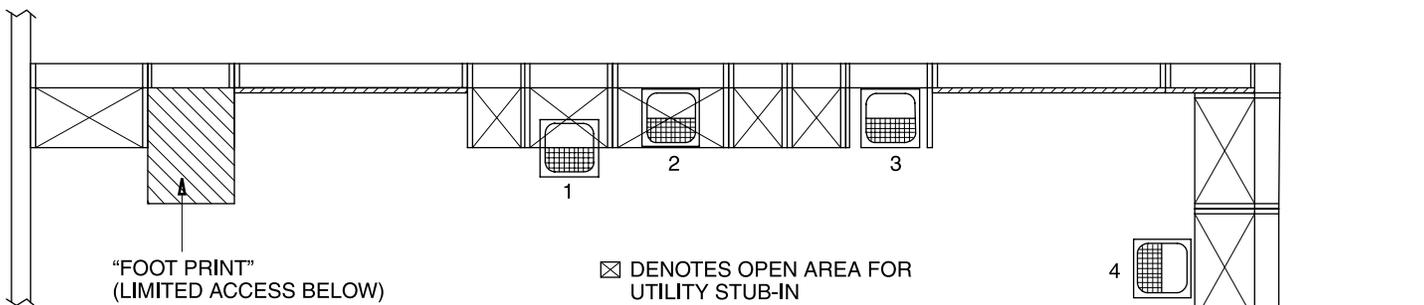

**ILLUSTRATION 1**

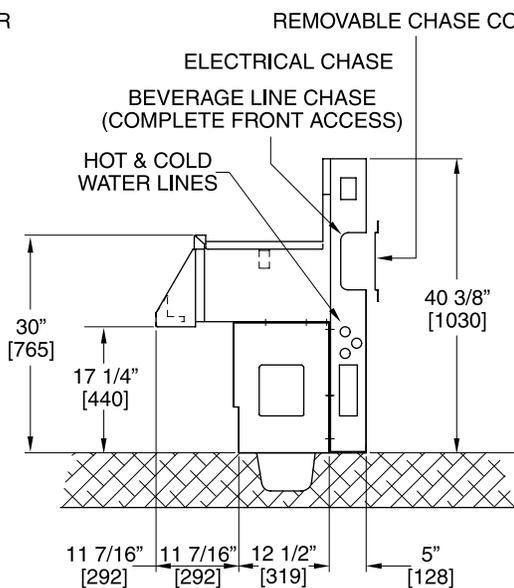

**ILLUSTRATION 2 & 3**

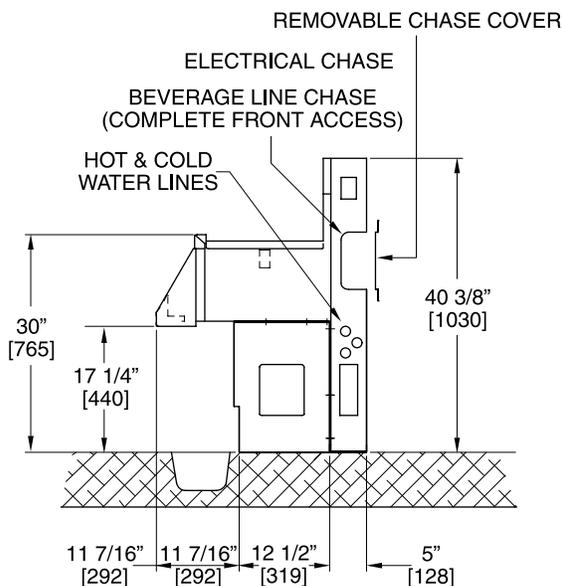

**ILLUSTRATION 4**

**Floor Sink Location  
Must Comply with  
Local Codes**



8300 West Good Hope Road • Milwaukee, WI 53223 • Phone 414-353-7060 • Fax 414-353-7069  
Toll Free 800-558-5592 • E-Mail: Perlick@Perlick.com • www.Perlick.com

Perlick is committed to continuous improvement. Therefore, we reserve the right to change specifications without prior notice. Form No. 080100 Rev. 1.16.03

## Victory - VERSA-1D-GD-HC



### Victory - VERSA-1D-GD-HC

Item: 16

Qty: 1

Category: Refrigerator, Reach-In

### Electrical

2.7 Amps, 1/4 HP, 115 Volts, 1 Ph, 60 Hz, 78" AFF, 78" ACH

Remarks -

### Plumbing

Remarks -

### HVAC

Remarks -

### Equipment

Remarks -

### Refrigeration

Remarks -

ACH = Above Counter Height, AFF = Above Finished Floor

# VICTORY

PROJECT: \_\_\_\_\_

ITEM # \_\_\_\_\_ QTY: \_\_\_\_\_

MODEL # \_\_\_\_\_

AIA # \_\_\_\_\_ SIS # \_\_\_\_\_

## VICTORY ELITE™ TOP MOUNT REFRIGERATOR

### VERSA-1D-GD-HC



- ▶ **3 Year Parts & Labor Warranty**  
Plus An Additional 4 Year Compressor Warranty
- ▶ **Exclusive 2 Year Warranty On Magnetic Door Gaskets**
- ▶ **Lifetime Warranty On Handles & Hinges (Parts Only)**

#### OPTIONS & ACCESSORIES

- Stainless Steel Back
- Stainless Steel Exterior
- Stainless Steel Interior
- Stainless Steel Breaker (No charge at time of unit order)
- Tray Slides
- 6" Legs Or 3" Casters
- Seismic/Flanged Legs
- Additional Shelves: Heavy Duty Epoxy Coated Chrome Plated Or Stainless Steel
- Remote Models\* (6" Legs Only)  
(Refrigerant must be specified at time of order, see note on back page)

#### CABINET CONSTRUCTION

- Stainless Steel Front, Aluminum Interior
- Snap-in, Magnetic Door Gasket(s) With A 2 Year Warranty
- Heavy Duty Cam Lift Hinges With Lifetime Warranty
- Stay-Open Door Feature For Easy Product Loading
- Required Clearance Is 12" Top, 3" Rear And 0" Sides
- Field Reversible Doors
- 6" Casters
- 8' Cord and Plug

#### FEATURES

- High Performance Refrigeration System With An Electronic Control
- Energy Efficient LED Lighting
- Heavy Duty Epoxy Coated Shelves

#### REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- Hot Gas Condensate Evaporator
- Adaptive Defrost For Reduced Energy Consumption And More Consistent Product Temperatures
- Epoxy Coated Evaporator Coil, Located Out Of The Food Zone
- Refrigerator Capable Of Maintaining Product Temperature Between 36°F And 38°F



Please verify qualifying units by visiting:  
[www.energystar.gov/cfs](http://www.energystar.gov/cfs)

VICTORY ELITE™ TOP MOUNT REFRIGERATOR

3779 Champion Blvd, Winston-Salem, NC 27105

ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com


Rev. 3/23/20 Printed in U.S.A.

APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_



## VICTORY ELITE™ TOP MOUNT REFRIGERATOR

### VERSA-1D-GD-HC

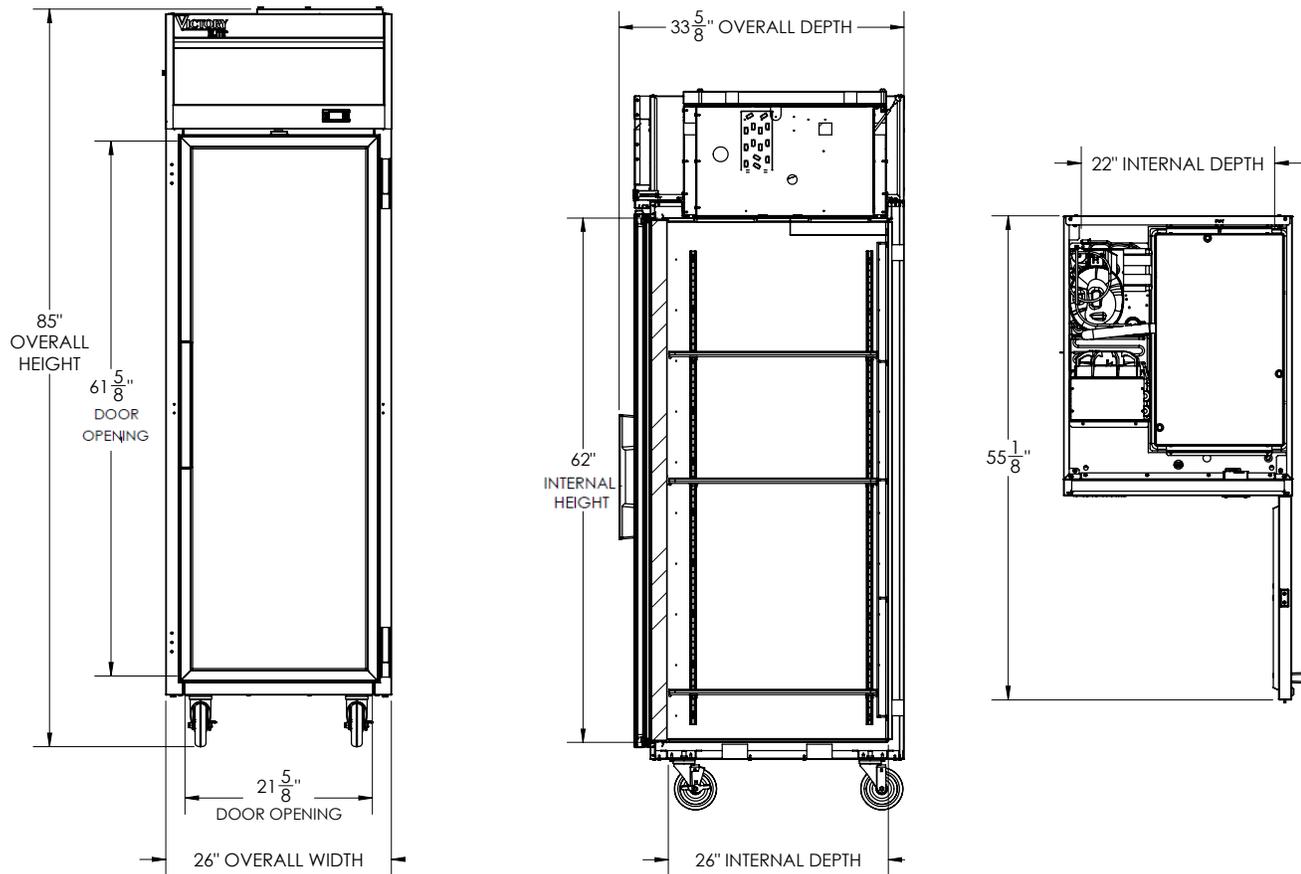

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

12" Top and 3" rear clearance is required

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft.)	21.66	Cabinet Voltage	115/60/1	Height	88"
Width, Overall (in.)	26"	Total Amperes	2.7	Width	33"
Depth, Overall (With Handle)	33 5/8"	NEMA Plug* (8' cord)	5-15P	Depth	41"
Height Overall (6" Casters)	85"	REFRIGERATION DATA		Crated Weight	356 lbs
Depth, Door Open 90°	55 1/8"	Condensing Unit Size, HP*	1/4	*NOTE: Remote units are field wired and comes with 6" legs. Refrigerant must be specified at time of order.	
Door Opening (in.)	21 5/8" x 61 5/8"	Refrigerant*	R290		
No. Of Doors/Shelves	1/3	Capacity (BTU/HR) (100°F/20°F)	1702		

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 3/23/20 Printed in U.S.A.

an Ali Group Company



The Spirit of Excellence