PLUMBING SYMBOL LIST <u>IDENTIFIER</u> DESCRIPTION NEW DOMESTIC COLD WATER ____ CW ____ _ _ HW NEW DOMESTIC HOT WATER ___ _ _ TW NEW TEMPERED WATER ___ S ____ NEW SANITARY PIPING (ABOVE SLAB) NEW SANITARY PIPING (UNDER SLAB) - — — - S - — — — NEW SANITARY VENT PIPING FIELD CONNECT FIELD DISCONNECT REFER TO SUPPLEMENTAL FIGURE INDICATED BY F# NUMBER (I.E. F2 REFERS TO FIGURE 2) /XXX**←** — EQUIPMENT TAG — EQUIPMENT NUMBER /xxx 😽 — DETAIL TAG/CALL OUT TAG X-XXX - PLUMBING SHEET NUMBER

PIPING ELEMENTS/VALVING

BACKFLOW PREVENTER (DOUBLE CHECK VALVE ASSEMBLY	∞— P-TRAP
(DOUBLE CHECK VALVE ASSEMBLY) ———⇒ PIPE DROPPING DOWN
—-∕ō— BALL VALVE	———O PIPE RISING UP
E CAP ON END OF PIPE	—N— SWING CHECK VALVE
-, CO⊢ CLEANOUT	— C TEE OUTLET DOWN
D B FLOOR DRAIN	——O— TEE OUTLET UP
— GATE VALVE	——— VALVE IN RISE OR DROP
HB Ş+ HOSE BIBB	W.C.O. WALL CLEAN OUT
THERMOSTATIC MIXING VALVE	WHA WATER HAMMER ARREST
☑ VALVE IN VALVE BOX	NFHB Ş+ NON FREEZE HOSE BIBB

SCOPE OF WORK

IN BOX W/VACUUM BREAKER

PLUMBING SCOPE OF WORK INCLUDES, BUT IS NOT LIMITED TO:

REMOVAL OF EXISTING PLUMBING FIXTURES WITH ALL ASSOCIATED PIPING.

2. THE INSTALLATION OF NEW DOMESTIC WATER SUPPLY FOR OLD MILL SCENERIES.

NOTE: THIS SCOPE OF WORK DESCRIPTION IS PROVIDED TO GIVE AN OVERALL "MACRO" DESCRIPTION OF THIS PROJECT .P.C. IS RESPONSIBLE TO REVIEW ALL ENGINEERING & ARCHITECTURAL DRAWINGS & VISIT THE SITE IF NEEDED, PRIOR TO SUBMISSION OF BID.

CODE REFERENCE

2020 NEW YORK STATE BUILDING CODE 2020 NEW YORK STATE MECHANICAL CODE 2020 NEW YORK STATE PLUMBING CODE 2020 NEW YORK STATE ENERGY CONSERVATION CODE

LEED NOTES

1. ALL ADHESIVES. SEALANTS. PAINTS & COATINGS APPLIED TO THE INTERIOR OF THE BUILDING (WITHIN THE WEATHER PROOFING SYSTEM, INCLUDING WALL CAVITIES) MUST NOT EXCEED THE LEED VOC LIMITS. PROVIDE A VOC SUBMITTAL AND MSDS FOR ALL ADHESIVES, SEALANTS, PAINTS AND COATINGS TO BE APPLIED.

PLUMBING GENERAL NOTES:

- ALL PLUMBING WORK UNDER THIS CONTRACT SHALL CONFORM TO THE LATEST EDITION OF THE PLUMBING CODE OF NEW YORK STATE (PC-NYS). THE NEW YORK STATE ENERGY CODE, AND THE REQUIREMENTS OF THE UTILITY AND THE LOCAL WATER COMPANY.
- ALL MATERIALS SHALL BE NEW UNLESS NOTED OTHERWISE.
- THE PLUMBING CONTRACTOR SHALL ASSUME RESPONSIBILITY FOR ALL LABOR AND MATERIALS SUPPLIED AND INSTALLED UNDER THIS CONTRACT AND SHALL GUARANTEE THE WORK PERFORMED UNDER THIS CONTRACT FOR A PERIOD OF ONE (1) YEAR FROM THE DATE OF ACCEPTANCE OF THIS WORK.
- PLUMBING CONTRACTOR SHALL CONSULT WITH, COOPERATE AND COORDINATE WITH THE GENERAL CONTRACTOR, MECHANICAL CONTRACTOR, SPRINKLER CONTRACTOR, ELECTRICAL CONTRACTOR, ETC. IN ORDER TO MINIMIZE INTERFERENCES BETWEEN TRADES DURING PERFORMANCE OF THIS WORK.
- THE PLUMBING CONTRACTOR SHALL PREPARE AND FILE ALL REQUIRED PLANS AND PERMITS WITH THE LOCAL AUTHORITIES. PC SHALL PAY THE FILING FEES AS REQUIRED. PC SHALL OBTAIN ALL APPROVALS AND SHALL PAY FOR ALL WORK PERMITS. INSPECTIONS AND SIGN-OFFS AS REQUIRED TO EXECUTE THIS WORK IN A MANNER IN CONFORMANCE WITH THE CODES AND AUTHORITIES HAVING JURISDICTION.
- THE PLUMBING CONTRACTOR SHALL PERFORM ALL TESTS AND ARRANGE FOR ALL INSPECTIONS FOR WORK UNDER HIS CONTRACT AS REQUIRED BY LAW AND SHALL SUPPLY ALL CERTIFICATES OF INSURANCE AS REQUIRED BY THE LAW AND THE OWNER. REFER TO SECTION 107 (INSPECTIONS) OF THE PC-NYS.
- THE PLUMBING CONTRACTOR SHALL MAKE ALL FINAL CONNECTIONS TO ALL PLUMBING EQUIPMENT REGARDLESS WHETHER ILLUSTRATED HEREIN WITHOUT ANY ADDITIONAL COSTS TO THE OWNER.
- 8. PLUMBING CONTRACTOR SHALL VISIT THE SITE & BECOME FAMILIAR WITH THE EXISTING CONDITIONS, INCLUDING THE SIZE OF CONNECTIONS, ROUGHING DIMENSIONS, ETC. BEFORE SUBMITTING A QUOTATION FOR THE WORK.
- PLUMBING CONTRACTOR SHALL PERFORM ALL CUTTING. EXCAVATION. BACKFILLING. ROUGH & FINISH PATCHING AS PER THE SPECIFICATIONS AS REQUIRED FOR THE INSTALLATION OF THE WORK, UNLESS NOTED OTHERWISE.
- 10. ALL CONNECTIONS TO NEW AND/OR EXISTING EQUIPMENT SHALL BE SIZED AND INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS.
- 11. IT IS THE INTENT OF THIS CONTRACT THAT THE COMPLETED WORK BE FULLY
- 12. ALL PIPE HANGERS AND SUPPORTS SHALL BE INSTALLED AT INTERVALS AND BE FABRICATED OF MATERIALS AS REQUIRED BY THE PC-NYS.
- 13. PLUMBING CONTRACTOR SHALL SUBMIT SHOP DRAWINGS FOR ALL NEW PLUMBING FIXTURES AND EQUIPMENT TO BE SUPPLIED AND INSTALLED UNDER THIS CONTRACT FOR APPROVAL BEFORE INSTALLATION OF SAME.
- 14. WATERPROOF PIPE SLEEVES SHALL BE INSTALLED AT ALL PENETRATIONS THROUGH EXTERIOR WALLS. PIPE SLEEVES SHALL BE INSTALLED AT ALL WALL PENETRATIONS THROUGH INTERIOR WALLS AND FLOORS.
- 15. ALL PIPING SHALL BE TESTED AT A MINIMUM PRESSURE OF 1-1/2 TIMES THE MAXIMUM OPERATING PRESSURE UNLESS OTHERWISE NOTED ON THE DOCUMENTS OR THE PLUMBING CODE AND IN ACCORDANCE WITH THE UTILITY REQUIREMENTS.
- 16. ALL REMOVALS PERFORMED UNDER THIS CONTRACT SHALL INCLUDE REMOVAL OF ALL DEBRIS AND DISPOSAL AT AN APPROPRIATE SITE.
- 17. REFER TO THE ARCHITECTURAL PLANS FOR ALL STRUCTURAL DIMENSIONS.
- 18. ALL WORK TO BE COORDINATED WITH OTHER TRADES.
- 19. ALL PIPING PENETRATIONS TO BE SEALED AROUND WITH "NELSON" FIRE SEAL.
- 20. GC IS RESPONSIBLE TO SUBMIT APPLICATION AND TAP FEES TO LOCAL WATER AUTHORITY AND HAVE OWNER FILL OUT APPLICATION UPON COMPLETION OF PLUMBING ROUGH-IN INSPECTION.
- 21. ALL PIPE DIMENSIONS ARE INSIDE CLEAR.
- 22. ALL PLUMBING FIXTURES TO HAVE ISOLATION VALVES.

ADDDEVIATIONS.

AE	BREVIATIONS:
AD	ACCESS DOOR
BFP	BACKFLOW PREVENTER
CO	CLEAN OUT
CW	COLD WATER
DCV	DOUBLE CHECK VALVE
DFU	DRAINAGE FIXTURE UNIT
DPCO	DECK PLATE CLEAN OUT
FC	FIELD CONNECT
FD	FLOOR DRAIN
FFD	FUNNEL FLOOR DRAIN
FU	FIXTURE UNIT
HW	HOT WATER
HWR	HOT WATER RETURN
IAW	IN ACCORDANCE WITH
IWFD	INDIRECT WASTE FUNNEL DRAIN
LAV	LAVATORY
JS	JANITOR'S SINK
NC	NORMALLY CLOSED
NO	NORMALLY OPEN
NYS-PC	NEW YORK STATE PLUMBING CODE
RD	ROOF DRAIN
S	SANITARY
SD	STORM DRAIN
TMV	THERMOSTATIC MIXING VALVE
U.O.N.	UNLESS OTHERWISE NOTED

UR

WC

MC

TYP.

VIF

WFU

URINAL

VENT

TYPICAL

WCO WALL CLEAN OUT

SPECIFIC ABBREVIATIONS USED.

WATER CLOSET

VERIFY IN FIELD

WATER FIXTURE UNITS

REFERENCE ONLY. THE PRESENCE OF AN

THE ABBREVIATIONS ARE SHOWN FOR GENERAL

ABBREVIATION ON THIS LIST DOES NOT IMPLY ITS

USE ON THIS PROJECT. REFER TO DRAWINGS FOR

PLUMBING CONTRACTOR


MECHANICAL CONTRACTOR

PLUMBING REMOVALS NOTES:

- DEMOLITON/RELOCATIONS: CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVALS AND RELOCATIONS OF PLUMBING EQUIPMENT AND MATERIAL RELATING TO HIS/HER RESPECTIVE TRADE. INCLUDE IN BID THE COST TO PROVIDE REMOVALS OF ALL PLUMBING EQUIPMENT AND SYSTEMS ASSOCIATED WITH THE RENOVATION WORK. COORDINATE WITH OWNER ALL REMOVALS WORK TO BE PERFORMED BY OWNER.
- (2) THE CONTRACTOR SHALL REMOVE, RELOCATE, REPLACE, ADJUST, ADAPT AND MODIFY EXISTING EQUIPMENT AND/OR SYSTEMS AS REQUIRED WHEN SUCH WORK IS UNCOVERED AND FOUND TO INTERFERE WITH COMPLETION OF WORK IN THIS CONTRACT OR OTHER CONTRACT WORK.
- (3) EXECUTE THE REMOVALS IN CAREFUL AND ORDERLY MANNER WITH THE LEAST POSSIBLE DISTURBANCE TO THE PUBLIC, EGRESS OR THE FUNCTIONING OF THE EXISTING BUILDING.
- (4) TAKE NECESSARY PRECAUTIONS TO PREVENT DUST AND DIRT FROM RISING BY WETTING REMOVED DEBRIS. EXCESSIVE USE OF WATER WILL NOT BE PERMITTED.
- (5) REMOVE ALL PIPE HANGERS WHEN REMOVING PIPING. PATCH SLAB AS REQUIRED.
- WHERE EXISTING WALLS, FLOORS OR CEILINGS ARE REMOVED OR PENETRATED, AND WHERE EXISTING END WALLS OF THE BUILDING ARE POINTS OF CONNECTION OF ADDITIONS, ALL SERVICES, PIPING, FIXTURES SHALL BE REMOVED (AND/OR RELOCATED WHERE THEY MUST REMAIN IN SERVICE, OR SERVE, AREAS BEYOND THE IMMEDIATE WORK) CONTRACTOR SHALL FIELD VERIFY CONDITIONS AT THE SITE
- PRIOR TO REMOVALS CONTRACTOR SHALL REVIEW WITH OWNER ALL MATERIALS TO BE REMOVED, SHOULD THE OWNER WANT TO KEEP ANY MATERIALS THE CONTRACTOR SHALL REMOVE AND DELIVER THE PARTS TO THE OWNER ON THE SITE WHERE SO DIRECTED. OTHERWISE ALL DEMOLISHED OR REMOVED MATERIALS SHALL BECOME THE PROPERTY OF THE CONTRACTOR AND SHALL BE REMOVED FROM THE SITE AND BE DISPOSED OF IN A LEGAL MANNER.
- REMOVALS SHALL INCLUDE REMOVAL OF ALL PARTS AND PIECES IN THEIR ENTIRETY BACK TO POINTS INDICATED OR IF NOT INDICATED BACK TO THEIR POINT OF SOURCE. WHERE CONDITIONS PROHIBIT TOTAL REMOVAL OF THE WORK, THE REMAINING PORTION SHALL BE CUT FLUSH WITH THE SURROUNDING SURFACE AND BE CAPPED, PLUGGED OR SEALED AND THE SURROUNDING SURFACE SHALL BE REFINISHED IN AN APPROVED MANNER.
- MAINTAIN EXISTING UTILITIES INDICATED OR REQUIRED TO REMAIN, KEEP IN SERVICE, AND PROTECT AGAINST DAMAGE DURING REMOVALS OPERATIONS. DO NOT INTERRUPT EXISTING UTILITIES SERVING OCCUPIED OR USED FACILITIES, EXCEPT WHEN SCHEDULED WITH THE OWNER.
- 10) DO NOT REMOVE EXISTING STRUCTURAL WORK. DO NOT REMOVE OPERATIONAL ELEMENTS AND SAFETY-RELATED COMPONENTS IN A MANNER RESULTING IN A REDUCTION OF CAPACITIES TO PERFORM IN THE MANNER INTENDED OR RESULTING IN DECREASED OPERATIONAL LIFE, INCREASED MAINTENANCE, OR DECREASED
-) REMOVALS, DISCONNECTIONS, AND RELOCATIONS SHALL BE PERFORMED BY WORKMEN SKILLED IN THE TRADE INVOLVED AND SHALL BE EMPLOYED BY A CONTRACTOR LICENSED IN THE TRADE INVOLVED. ALL WORK SHALL BE DONE IN ACCORDANCE WITH ACCEPTED TRADE PRACTICES.
- (12) PROVIDE ADEQUATE TEMPORARY SUPPORT FOR WORK TO REMAIN, TO PREVENT FAILURE. DO NOT ENDANGER OTHER WORK.
- (13) PROTECTION:PROVIDE ADEQUATE PROTECTION WHERE REQUIRED FOR THE PRESENT BUILDING AND ITS CONTENTS. TEMPORARY DUSTPROOF BARRIERS AND BARRICADES SHALL BE ERECTED WHERE REQUIRED FOR PROTECTION OF PERSONNEL, PROTECTION FROM DUST AND DIRT, FOR SECURITY, FIRE AND WEATHER PROTECTIVE REASONS. CONTRACTOR SHALL TAKE EVERY PRECAUTION AGAINST FIRE BY EMPLOYING FIRE DEPARTMENT TYPE HOSES AND PORTABLE FIRE EXTINGUISHERS AS REQUIRED BY OSHA AND/OR THE OWNER'S INSURANCE UNDERWRITER. BEFORE STARTING REMOVALS OPERATIONS, PROVIDE THE NECESSARY PROTECTIVE DEVICES, WHERE REQUIRED, AND IN STRICT ACCORDANCE WITH OSHA RULES AND REGULATIONS.
- (14) USE TEMPORARY ENCLOSURES, OR OTHER SUITABLE METHODS TO LIMIT DUST AND DIRT RISING AND SCATTERING TO LOWEST PRACTICAL LEVEL. COMPLY WITH GOVERNING REGULATIONS PERTAINING TO ENVIRONMENTAL PROTECTION.
- 5) ALL EXISTING EQUIPMENT REQUIRED TO BE REUSED SHALL BE CLEANED RECONDITIONED, CALIBRATED AND ADJUSTED. IN ALL INSTANCES WHERE CONTRACTOR FINDS THAT EXISTING EQUIPMENT IS DEFECTIVE TO THE POINT WHERE IT CANNOT BE PROPERLY RESTORED AND WILL NOT OPERATE PROPERLY, HE SHALL REPORT THE SPECIFIC INSTRUMENTS OR EQUIPMENT TO THE ARCHITECT/ENGINEER FOR DIRECTIONS.
- (16) FIELD VERIFY REMOVALS REQUIREMENTS AND EXISTING CONDITIONS.
- (17) CONTRACTOR SHALL ESTABLISH A PATH OF TRAVEL AND TIME SCHEDULE FOR THE REMOVAL OF ALL DEBRIS AND WASTE, AND HAVE THIS APPROVED BY OWNER. CONTRACTOR IS TO ENSURE THAT ALL CORRIDORS AND PUBLIC AREAS BE KEPT FREE OF OBSTRUCTIONS, DEBRIS, AND ARE TO BE BROOM SWEPT CLEAN AT ALL
- (18) CONTRACTOR SHALL VISIT THE SITE AND BECOME INFORMED AS TO THE CONDITION OF THE PREMISES AND THE EXTENT AND CHARACTER OF WORK REQUIRED. NO ADDITIONAL COMPENSATION WILL BE APPROVED DUE TO FIELD CONDITIONS.
- (19) THIS CONTRACTOR SHALL NOT INTERRUPT ANY OF THE SERVICES OF THE EXISTING BUILDING NOR INTERFERE WITH THE SERVICES IN ANY WAY WITHOUT THE EXPRESSED PERMISSION OF THE OWNER. SUCH INTERRUPTIONS AND INTERFERENCES SHALL BE MADE AS BRIEF AS POSSIBLE AND ONLY AT THE TIME AGREED TO BY THE OWNER.
- (20) WHERE THE WORK MAKES TEMPORARY SHUTDOWNS OF SERVICES UNAVOIDABLE, THEY SHALL BE MADE AT TIMES AS WILL CAUSE THE LEAST INTERFERENCE WITH THE ESTABLISHED OPERATING ROUTINE OF THE BUILDING.
- (21) THIS CONTRACTOR SHALL GIVE 72 HOUR NOTICE IN ADVANCE TO THE OWNER OF ANY REQUESTED SHUTDOWNS.
- (22) THIS CONTRACTOR SHALL ARRANGE THE WORK CONTINUOUSLY TO ASSURE THAT SERVICES WILL BE SHUTDOWN AND RECONNECTED ONLY DURING THE TIME ACTUALLY REQUIRED TO MAKE THE NECESSARY CONNECTIONS EXISTING WORK.
- (23) TO INSURE CONTINUOUS OPERATION, MAKE ALL NECESSARY TEMPORARY CONNECTIONS BETWEEN NEW AND EXISTING WORK. ALL COSTS RESULTING FROM TEMPORARY SHUTDOWNS BORNE BY THIS CONTRACTOR.
- (24) ANY AND ALL REQUIRED REMOVALS WORK TO BE PERFORMED ABOVE EXISTING SUSPENDED CEILINGS AND FURRED OUT WALLS SHALL BE DONE AT THE TIME WHEN THE EXISTING CEILINGS AND FURRED OUT WALLS ARE REMOVED BY THE CONTRACTOR. COORDINATE SCHEDULING TO AVOID DISTURBING RECENTLY FINISHED WORK.

POURED CONCRETE OR C.M.U. WALL. PIPE SLEEVE - ANCHOR LUGS (MIN. 3 REQ'D) ESCUTCHEON PLATE -ON ONE OR BOTH SIDES WHERE PIPING PIPE INSULATION (WHERE REQ'D) IS EXPOSED. FIRE RESISTANT-SILICONE FOAM SEALER NOTES: 1. FOR INTERIOR WALLS AND BELOW GRADE GROUND TO GROUND WALLS

PIPE SLEEVE THROUGH WALL DETAIL / SCALE: NOT TO SCALE

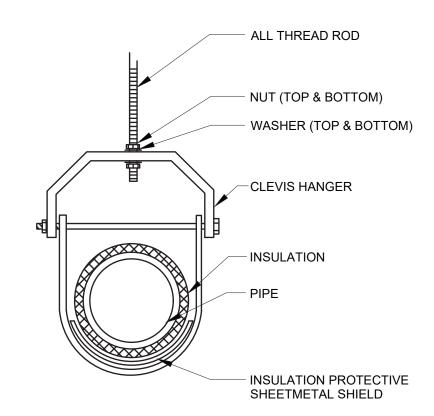

TYPICAL CLEVIS HANGER DETAIL P-01 / SCALE: NOT TO SCALE

	PLUMBING DRAWING LIST		
SHEET NO.	SHEET NAME	REVISON NO.	REVISION DATE
CXB-P-01	PLUMBING NOTES, SYMBOLS, ABBREVIATIONS AND DRAWING LIST	0	-
CXB-P-11	PLUMBING DEMOLITION PLANS	0	-



ONSULTANT SEAL	
PIEOF NEW OPOTION O	

SEAL NEW POR	
HANN THE PROPERTY OF THE PROPE	
9011 SSIONALE	REV NUM
The second	

REVISION NUMBER	DATE	MADE BY	APP'D BY	REVISION


RECORD DRAWING CERTIFICATION AS BUILT — CHANGES AS NOTED CONTRACTOR

TITLE _____ DATE ____

PROJECT COORDINATOR NAME _____ SIGNATURE _____

AS BUILT - NO CHANGES

WESTCHESTER COUNTY, NEW YORK	CONTRACT SHEET NUMBER NUMBER	
DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION	20-530	CXB-P-01
DIVISION OF ENGINEERING	DWG NO.: Page 20	9 of 288
INFRASTRUCTURE REHABILITATION - PHASE 2 PLAYLAND PARK, RYE, NEW YORK	SCALE: AS NOT	ED
CXB - BUILDING CONVERSION	DATE: MAY 26, 2	2021
PLUMBING NOTES, SYMBOLS, ABBREVIATIONS AND DRAWING LIST	DPW FILE 1-118-P-59	97 REV. NO. 0

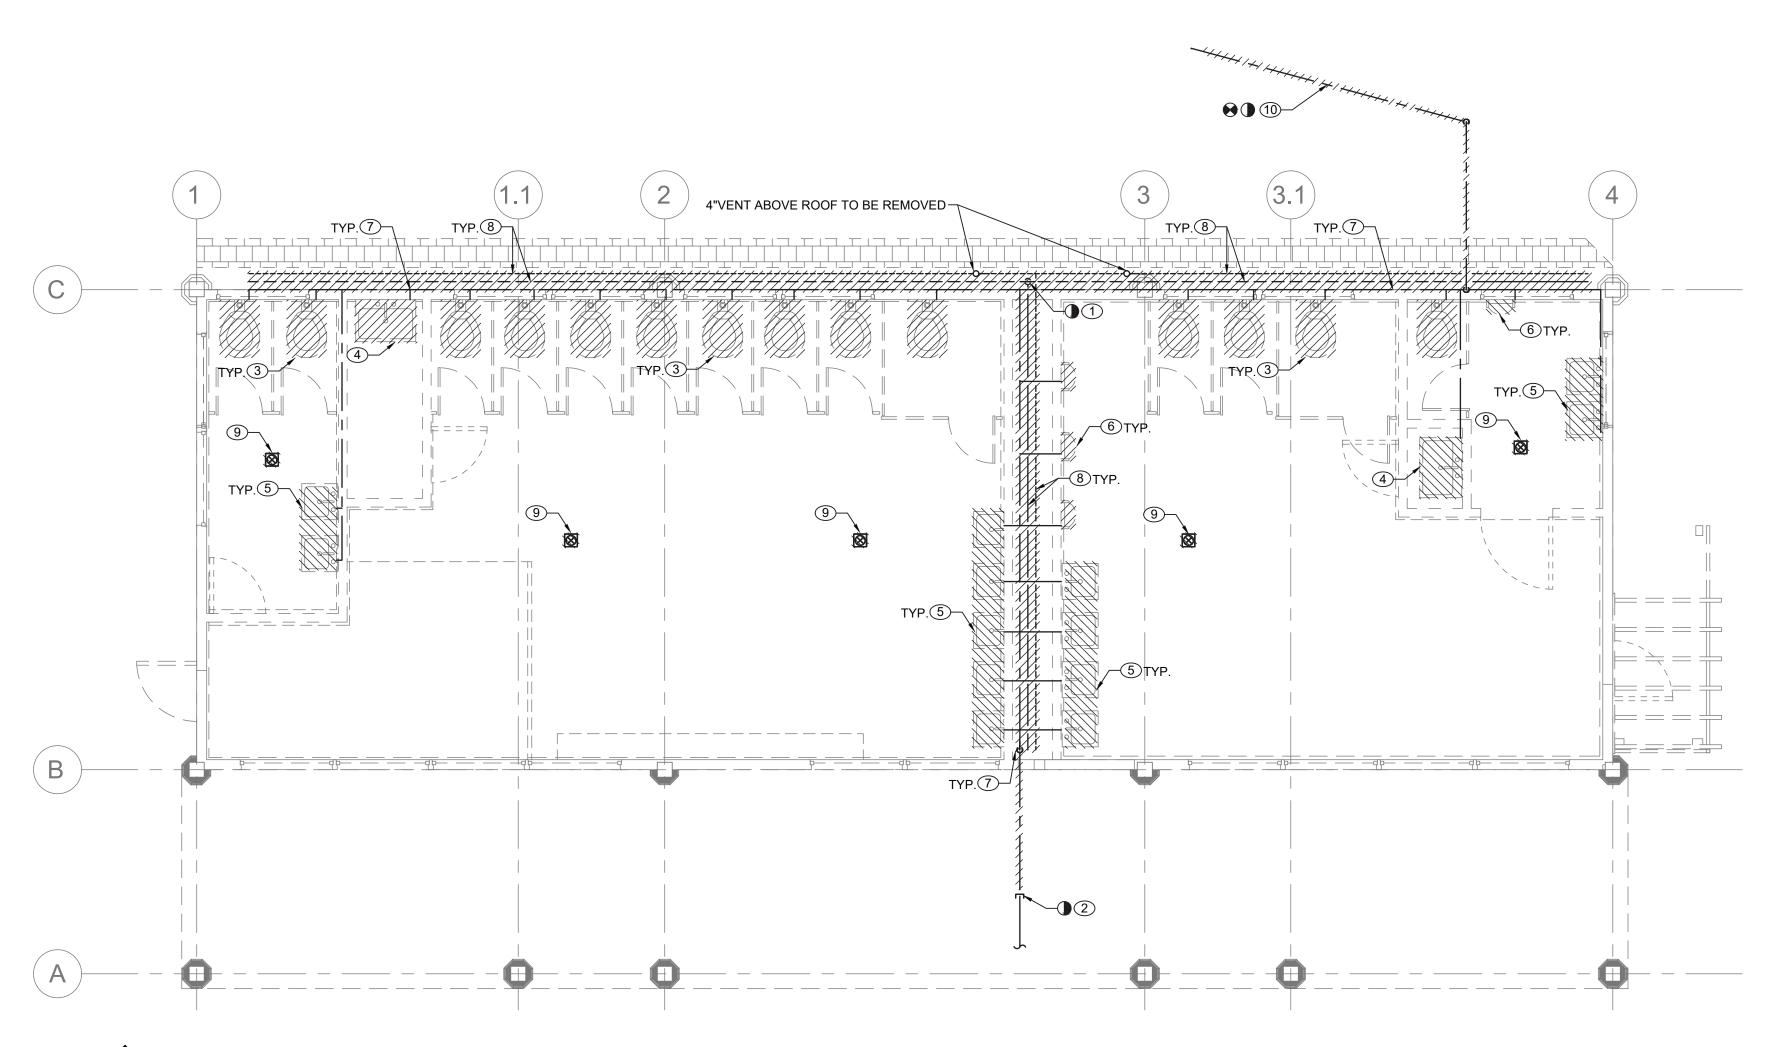

Y PLUMBING FIRST FLOOR FLOOR DEMOLITION PLAN

CONSULTANT INFORMATION		
R	LiRo Eng A LiRo Group	ineers, Inc.
	Syosset, N.Y.	516-214-8157[T]

CONSULTANT SEAL						=
TEOF NEW TO THE OF THE OF NEW TO THE OF THE OF NEW TO THE OF NEW TO THE OF THE OF NEW TO THE OF THE OF NEW TO THE OF THE						AS BUI
3						NAME SIGNATURE
POFESSIONAL	REVISION NUMBER	DATE	MADE BY	APP'D BY	REVISION	TITLE

RECORD DRAWING CERTIFICATION BUILT — CHANGES AS NOTED AS BUILT - NO CHANGES PROJECT COORDINATOR CONTRACTOR

WESTCHESTER COUNTY, NEW YORK DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION DIVISION OF ENGINEERING

INFRASTRUCTURE REHABILITATION - PHASE 2 PLAYLAND PARK, RYE, NEW YORK CXB - BUILDING CONVERSION PLUMBING DEMOLITION PLANS

	CONTRACT NUMBER	SHEET NUMBER						
N	20-530	СХВ-Р-	CXB-P-11					
	DWG NO.: Page 210 of 288							
	SCALE: AS NO	OTED						
	DATE: MAY 26	, 2021						
	DPW FILE 1-118-P	598	REV.	0				

PLUMBING DEMOLITION NOTES:

- 1 CONTRACTOR CUT AND CAP UNDERGROUND EXISTING SANITARY SERVICE 5 FEET FROM AREA OF WORK. FOR CONTINUATION AND MORE DETAILS REFER TO CIVIL DRAWINGS.
- (2) CONTRACTOR CUT AND CAP UNDER DECK EXISTING 2" DOMESTIC WATER SERVICE BACK TO SOURCE OUTSIDE OF AREA OF WORK. PROTECT EXISTING WATER SERVICE TO OTHER STRUCTURES DURING
- 3 DISCONNECT AND REMOVE EXISTING WATER CLOSET WITH ALL ASSOCIATED PIPING, SUPPORTS AND TRIMS
- 4) DISCONNECT AND REMOVE EXISTING SERVICE SINK WITH ALL ASSOCIATED PIPING SUPPORTS AND TRIMS (TYPICAL FOR ALL).
- 5 DISCONNECT AND REMOVE EXISTING LAVATORY WITH ALL ASSOCIATED PIPING, SUPPORTS AND TRIMS (TYPICAL FOR ALL).
- 6 DISCONNECT AND REMOVE EXISTING URINAL WITH ALL ASSOCIATED PIPING, SUPPORTS AND TRIMS (TYPICAL FOR ALL).
- 7 REMOVE ALL EXISTING DOMESTIC COLD WATER PIPING (TYPICAL).
- 8 REMOVE ALL EXISTING BELOW AND ABOVE GROUND SANITARY AND VENT PIPING (TYPICAL).
- 9 DISCONNECT AND REMOVE EXISTING FLOOR DRAINS WITH ALL ASSOCIATED PIPING, SUPPORTS AND TRIMS (TYPICAL FOR ALL).
- (10) DISCONNECT AND REMOVE 3/4" COLD WATER SUPPLY FOR OLD MILL SCENERIES AND PROVIDE NEW POINT OF CONNECTION FROM CARPENTER'S SHOP, EXACT LOCATION VERIFY IN FIELD.

GENERAL NOTES:

- 1. ALL EXISTING PIPING ARE SHOWN AS A REFERENCE ONLY. CONTRACTOR SHALL FIELD VERIFY LOCATIONS AND SIZES FOR ALL EXISTING SERVICES PRIOR TO DEMOLITION.
- 2. COORDINATE WITH FACILITY PRIOR TO SHUTDOWN OF DOMESTIC WATER SYSTEM FOR ANY DEMOLITION AND CONSTRUCTION WORK.