

FIRST FLOOR OVERALL DEMOLITION RCP
1/16" = 1'-0" **A6**


DEMOLITION NOTES:

1. VERIFY ALL EXISTING CONDITIONS BEFORE COMMENCING WITH DEMOLITION WORK. NOTIFY ARCHITECT OF ANY DISCREPANCIES.
2. ALL DIMENSIONS ARE TO BE VERIFIED IN THE FIELD.
3. INTERIOR WALL DIMENSIONS ARE MEASURED FROM FINISH FACE OF GYP BOARD, CMU OR PLASTER U.O.N.
4. ALL DEMO WORK SHOULD BE COORDINATED WITH THE NEW WORK PLANS. ABATEMENT SCOPE IS TO BE COMPLETED FIRST AND SIGNED OFF BY THE INSPECTOR OR ANY GOVERNED AGENT BEFORE ANY OTHER DEMO WORK IS STARTED.
5. ALL NEW OPENINGS FOR DOORS AND WINDOWS SHALL BE COORDINATED WITH NEW WORK PLANS FOR LOCATIONS AND SIZES.
6. DEMO KEYNOTES ARE TYPICAL AND APPLY TO MATERIALS OF THE LIKE SHOWN IN PLAN.
7. IT IS NOT THE INTENT TO SHOW EVERY PIECE OR ITEM TO BE REMOVED IN DEMOLITION WORK. MECHANICAL, ELECTRICAL, AND OTHER WORK RELATED TO A WALL OR AREA SCHEDULED FOR DEMOLITION AND REMOVAL, SHALL BE PERFORMED WHETHER SO NOTED OR NOT. PROTECT ALL ITEMS INTENDED FOR SALVAGE AND REUSE, OR SCHEDULED TO REMAIN.
8. WHEN WALLS OR OTHER SUPPORTING AND/OR BRACING ELEMENTS ARE SCHEDULED FOR DEMOLITION, TEMPORARY STRUCTURAL SUPPORTS AND BRACING FOR ADJACENT CONSTRUCTION SHALL BE PROVIDED AND MAINTAINED UNTIL THE PERMANENT SUPPORTING STRUCTURE IS IN PLACE AND ABLE TO SUPPORT IMPOSED LOADS.
9. EXISTING ACT TILE TO BE REMOVED AND REPLACED / MODIFIED AS REQUIRED FOR MEP DEMOLITION AND NEW WORK.
10. CUT AND PATCH GYP CEILING AS REQUIRED FOR MEP WORK. REFER TO MEP DRAWINGS: FINISH AND PAINT GYP, WALLS AND PLASTER CEILINGS TO MATCH EXISTING.
11. PROTECT ALL ADJACENT SURFACES AND MATERIALS DURING DEMOLITION. CONTRACTOR SHALL BE RESPONSIBLE FOR ALL DAMAGE CAUSED AS A RESULT OF WORK AND SHALL REPAIR OR REPLACE DAMAGED MATERIALS OR PRODUCTS.
12. COORDINATE WITH MEP DRAWINGS FOR DEMOLITION AND NEW WORK PENETRATIONS.
13. CUT AND PATCH ROOF AS REQUIRED FOR MEP WORK. REFER TO MEP DEMOLITION AND NEW WORK ROOF PLAN DRAWINGS.

CEILING PLAN NOTES:

1. V.I.F. ALL CEILING HEIGHTS PRIOR TO REMOVALS.
2. THE CONTRACTOR SHALL COMPARE THIS REFLECTED CEILING PLAN WITH ELECTRICAL LIGHTING PLANS AND MECHANICAL PLANS. THE CONTRACTOR SHALL REPORT ANY OMISSIONS OR INCONSISTENCIES TO THE ARCHITECT.
3. ALL LIGHT FIXTURE DIMENSIONS ARE MEASURED FROM CENTERLINE OF FIXTURE TO FACE OF WALL/SOFFIT U.O.N.
4. REFER TO ELECTRICAL PLANS FOR LOCATION AND QUANTITY OF SMOKE DETECTORS, EXIT SIGNS, SPEAKERS AND FIRE ALARM DEVICES. ALL SMOKE DETECTORS TO BE CENTERED ON ACT TILE WHERE PRESENT.
5. PROVIDE ACCESS DOORS FOR MECHANICAL EQUIPMENT.
6. COORDINATE WITH MECH PLANS, TYP.
7. SEE FINISH SCHEDULE FOR PAINT COLOR.
8. CENTER ALL CEILING TILE GRIDS BOTH DIRECTIONS IN ALL ROOMS/SPACES/CORRIDORS. NO PERIMETER GRID SPACING / ACOUSTICAL TILE CUT LESS THAN 6".
9. ALL LIGHT FIXTURES AND DIFFUSERS SHALL BE CENTERED ON THE TILE U.O.N.
10. SHADOW MOLDING TO BE USED AROUND THE PERIMETER OF ACOUSTIC CEILING TILE WHEN EDGE IS LESS THAN 5"

DEMOLITION LEGEND:

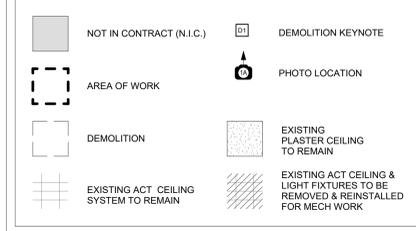

DEMO NOTES KEYNOTES:

- REMOVE, MODIFY & REINSTALL EXISTING ACT CEILING FOR NEW MECH WORK. RE MECH DRAWINGS

ARCHITECT
ksqdesign
NEW YORK OKLAHOMA

KSQ Design
215 W 40th Street 13th Floor
New York, NY 10018
646.435.0660 office
www.ksqdesign.com

Owner
Nanuet Union Free School District
101 Church Street
Nanuet, NY 10954
845.627.9880
www.nanuetd.org

Structural Engineer
Clapper Structural Engineering
160 Partition Street
Saugerties, NY 12477
845.943.9801
www.clappersstructural.com

MEP Engineer
Sage Engineering Associates, LLP
9 Columbia Circle
Albany, NY 12203
518.453.6091
www.sageeip.com


Environmental Engineer
Quest Environmental Solutions
1376 Route 9
Wappingers Falls, NY 12590
845.298.6251
www.qualityenv.com

Construction Manager
Jacobs
One Penn Plaza
24th Floor, Suite 2400
New York, NY 10119
646.808.6260
www.jacobs.com



**NUFSD BOND
PHASE 5
PROJECT -
MILLER ES**

- Highview Elementary School
24 Highview Ave
Nanuet, NY 10954
- OEC Building
135 Convent Rd
Nanuet, NY 10954
- Maintenance Building
103 Church St
Nanuet, NY 10954
- Miller Elementary School
50 Blauvelt Rd Unit
Nanuet, NY 10954
- A MacArthur Barr Middle School
143 Church St
Nanuet, NY 10954



REVISIONS

No.	Description	Date

ISSUED: BID SET
DATE: 06/21/2024
SCALE: As indicated
SHEET NAME:
1ST FLOOR DEMOLITION
RCP

SHEET NUMBER:
ME-AD111

ISSUE FOR BID SET