


File Name: F:\2020\20-357 SUNY ORANGE CHILLER REPLACEMENT\MEPD-101 & MEP-101.dwg (Layout: MEPD-101)
Date: Tue, Aug 31, 2021 - 2:53 PM (Name: WPB)

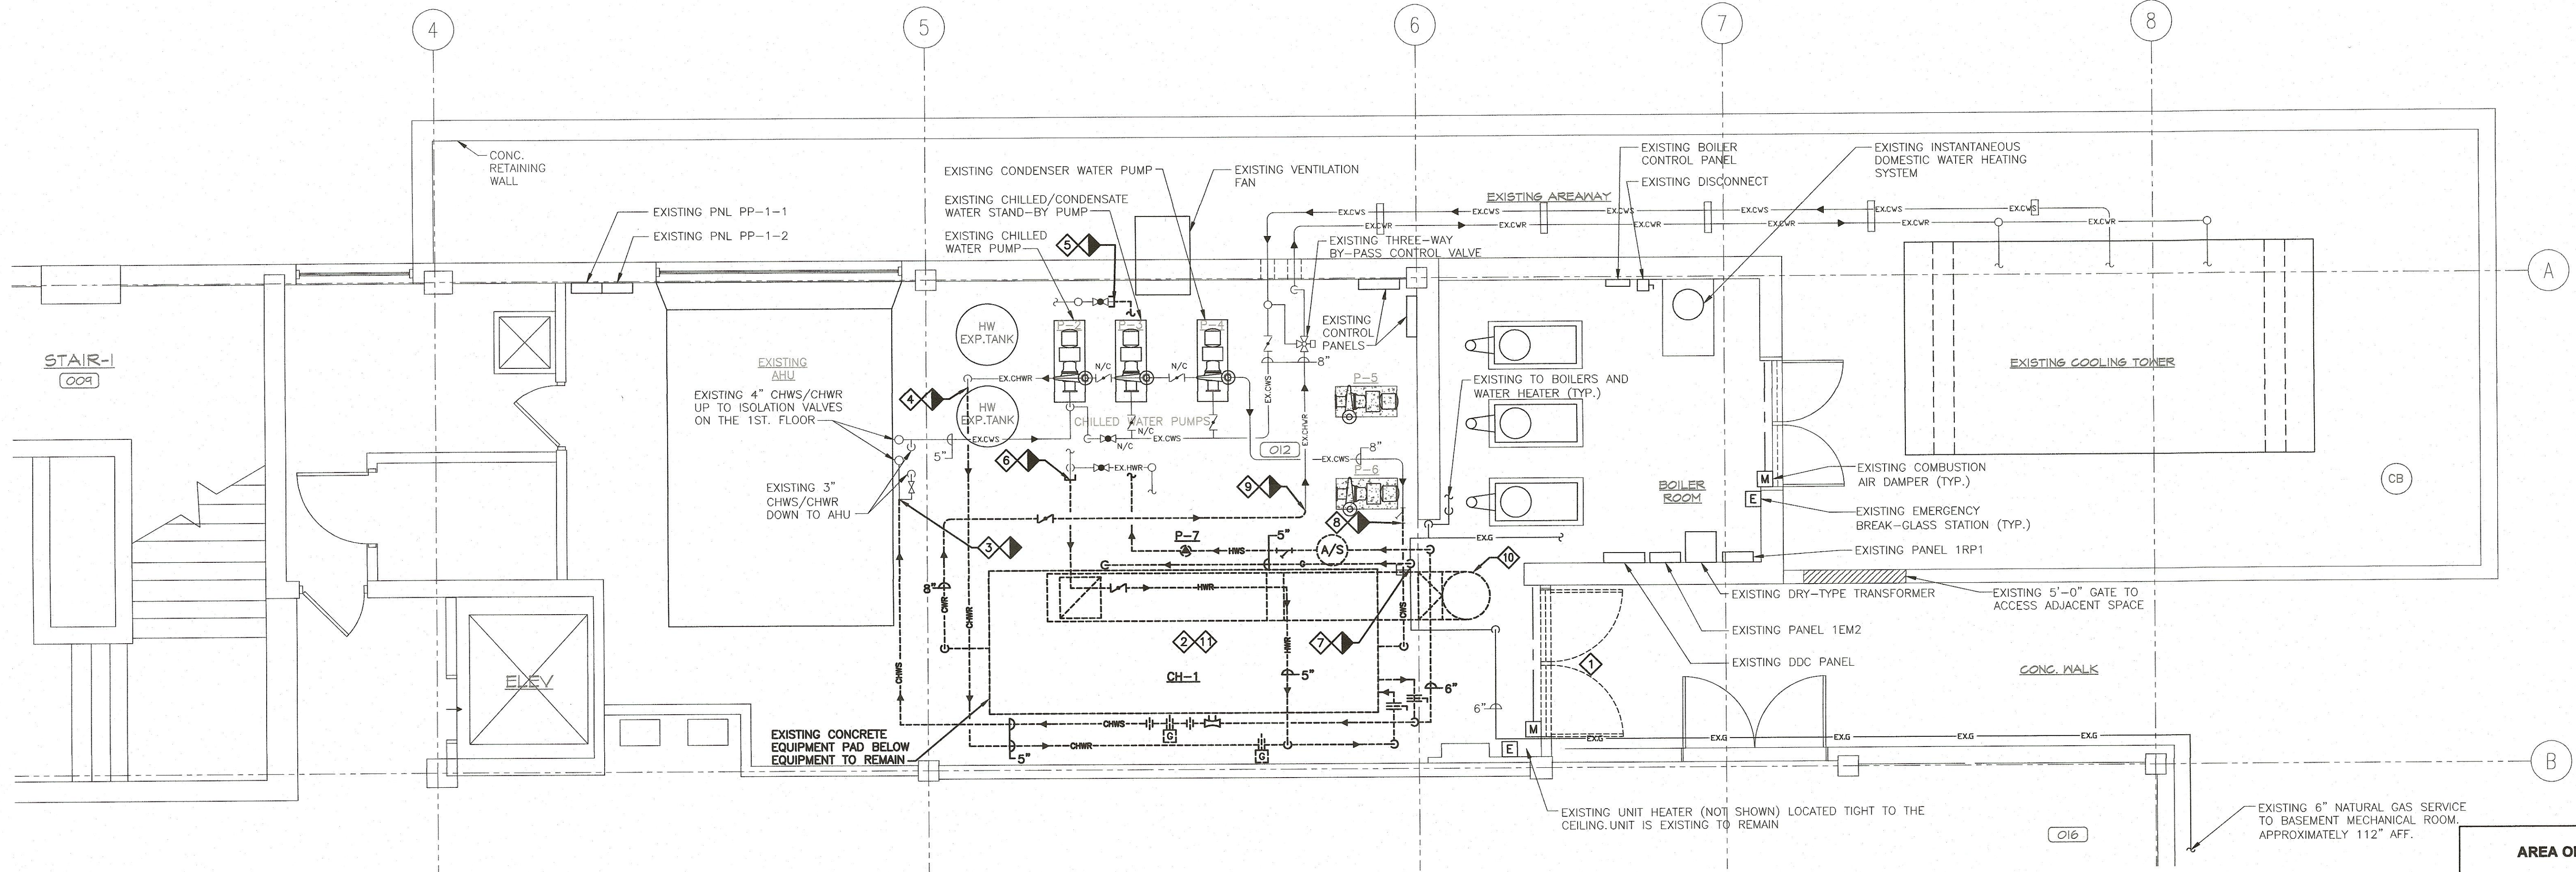

1 PARTIAL BASEMENT DEMOLITION PLAN
SCALE: 1/4"=1'-0"

DEMOLITION KEYED NOTES:

- 1 REMOVE EXISTING DOOR, FRAME, LOUVER AND MOTORIZED DAMPER PRIOR TO DEMOLITION OF THE EXISTING CHILLER. RE-INSTALL ALL ORIGINAL EQUIPMENT ONCE THE NEW CHILLER IS FULLY INSTALLED. REFER TO DETAIL 2/MEP-702. TEMPORARY SECURE AND WEATHER PROOF EXISTING OPENINGS DURING CONSTRUCTION.
- 2 DEMOLISH ALL EXISTING CONDUIT AND WIRE FROM THE CHILLER BACK TO THE PANEL OF ORIGIN AND RE-LABLE CIRCUIT AS SPARE.
- 3 DEMOLISH EXISTING 5" CHWS BACK TO MAIN TEE.
- 4 DEMOLISH EXISTING 5" CHWR BACK TO ELBOW.
- 5 DEMOLISH EXISTING 6" HWS BACK TO GATE VALVE AND CAP. ADDITIONALLY EXISTING PUMP #7 SHALL BE TURNED OVER TO THE COLLEGE.
- 6 DEMOLISH EXISTING 6" HWR BACK TO MAIN TEE AND CAP.
- 7 DEMOLISH ALL GAS PIPING, VENTING, VALVES, REGULATOR, ETC. FROM THE CHILLER BACK TO THE MAIN AND CAP.
- 8 DEMOLISH EXISTING 8" CWS BACK TO STRAINER.
- 9 DEMOLISH EXISTING 8" CWR BACK TO ELBOW.
- 10 DEMOLISH EXISTING 26" ID, 28" OD DOUBLE WALL VENT PIPE FROM THE CHILLER UP TO THE ROOF. REFER TO DETAIL 1/MEP-702 FOR MORE INFORMATION.
- 11 EXISTING EQUIPMENT PAD TO REMAIN. INFILL SECTION UNDER BURNER SECTION TO CREATE A LEVEL SURFACE FOR THE NEW CHILLER. REFER TO DETAIL 3/MEP-702 FOR MORE INFORMATION.

GENERAL DEMOLITION NOTES:

1. BUILDING TO REMAIN 100% SECURE WHILE DEMOLITION WORK AND INSTALLATION OF EQUIPMENT IS COMPLETED.
2. DUMPSTER TO BE LOCATED IN THE VICINITY OF THE LOADING DOCK. THE LOADING DOCK SHALL REMAIN CLEAR AT ALL TIMES.

