


THESE DRAWINGS AND DESIGNS ARE THE PROPERTY OF STINARD ARCHITECTURE INC. AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF STINARD ARCHITECTURE INC. ANY REPRODUCTION OR TRANSMISSION OF THESE DRAWINGS WITHOUT THE WRITTEN PERMISSION OF STINARD ARCHITECTURE INC. IS A VIOLATION OF THE COPYRIGHT LAWS OF THE UNITED STATES OF AMERICA AND MAY BE SUBJECT TO CIVIL AND CRIMINAL PENALTIES. THE ARCHITECT NOTIFIED OF ANY DISCREPANCIES BEFORE PROCEEDING WITH CONSTRUCTION. DO NOT SCALE DRAWINGS.

Life Storage #230
Self Storage Phase II
1639 Route 22
Brewster, NY 10509

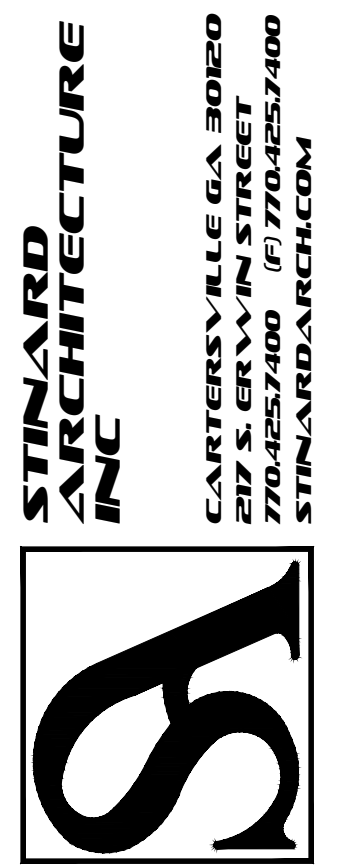

ISSUE: FOR CONSTRUCTION
REVISIONS:

PROJECT NUMBER	201941
DATE	6-5-20


SHEET NUMBER
E1.1

GENERAL NOTES


- REFER TO ARCHITECTURAL REFLECTED CEILING PLAN FOR EXACT LOCATIONS OF ALL CEILING MOUNTED DEVICES.
- ALL RECEPTACLES SHALL BE GROUNDED AS REQUIRED BY ARTICLE 250-146.
- PROVIDE UNSWITCHED HOT LEG OF CIRCUIT TO EMERGENCY LIGHTING AND EXIT SIGNS.
- EXTERIOR FIXTURES SHALL BE CONNECTED TO LIGHTING CONTROL PANEL AND SHALL BE TIME CLOCK CONTROLLED UNLESS OTHERWISE NOTED.
- LIGHTS LABELED NL ARE NIGHT LIGHTS.
- COORDINATE ALL PROGRAMMING OF LIGHTING CONTROL SYSTEMS WITH OWNER PRIOR TO DEVELOPMENT OF CLOSE-OUT DOCUMENTS.
- AUTOMATIC CONTROLS TO SHUT OFF ALL BUILDING LIGHTING INSTALLED IN ALL BUILDINGS. FIELD COORDINATE EXACT REQUIREMENT WITH OWNER'S REPRESENTATIVE FOR THE SHUTOFF OPERATION. TIMECLOCK OR VACANCY SENSORS.
- CONTRACTOR SHALL DESIGN THIS BUILDING'S SPRINKLER SYSTEM TO BE FED FROM FIRE PUMP LOCATED IN ADJACENT BUILDING AND UNDERGROUND TANKS. CONTRACTOR TO PROVIDE OWNER AN ADD ALTERNATE PRICING FOR THE INSTALLATION OF A FIRE PUMP DEDICATED TO THIS BUILDING, WITH ALL NECESSARY COMPONENTS. THIS SHALL BE PROVIDED AS A SEPARATE LINE ITEM TO THE BASE BID. REFER TO DRAWING FOR ADD ALTERNATE NOTES AND REFER TO ADD ALTERNATE SCHEDULE.

KEYNOTES

- 1 JUNCTION BOX FOR SLIDING GLASS DOOR. COORDINATE EXACT LOCATION IN FIELD WITH DOOR INSTALLER.
- 2 PROVIDE JUNCTION BOX FOR POWER TO KEYPAD. COORDINATE EXACT MOUNTING HEIGHT AND LOCATION IN FIELD.
- 3 MONUMENT SIGNAGE. COORDINATE EXACT LOCATION AND REQUIREMENTS WITH ARCHITECT AND CIVIL ENGINEER. CONTROLLED VIA TIMECLOCK AND PHOTOCELL.
- 4 LOCATE RECEPTACLE BY EACH 'FURN' FOR POWER FOR CONDENSATE PUMP. FIELD COORDINATE EXACT LOCATION.
- 5 PROVIDE RECEPTACLES IN CORRIDORS LOCATED AT 7' AFF WITH LOCKABLE COVERS.
- 6 PROVIDE DEDICATED POWER FOR HANDICAPPED DOOR MOTOR. FIELD COORDINATE EXACT LOCATION. TYPICAL.
- 7 JUNCTION BOX TO POWER HEAT TRACE FOR CONDENSATE RISER. FIELD COORDINATE EXACT REQUIREMENT AND LOCATION WITH INSTALLER.
- 8 PROVIDE JUNCTION BOX FOR CALL BOX. PROVIDE JUNCTION BOX AND CONDUIT WITH PULL STRING TO HALLWAY SYSTEM.
- 9 ROUTE (2) 2" C FROM TELEPHONE UTILITY DEMARCATION POINT WITH PULL STRING.
- 10 POWER FOR HEAT TRACE. CONTRACTOR TO COORDINATE EXACT REQUIREMENT AND LOCATION.

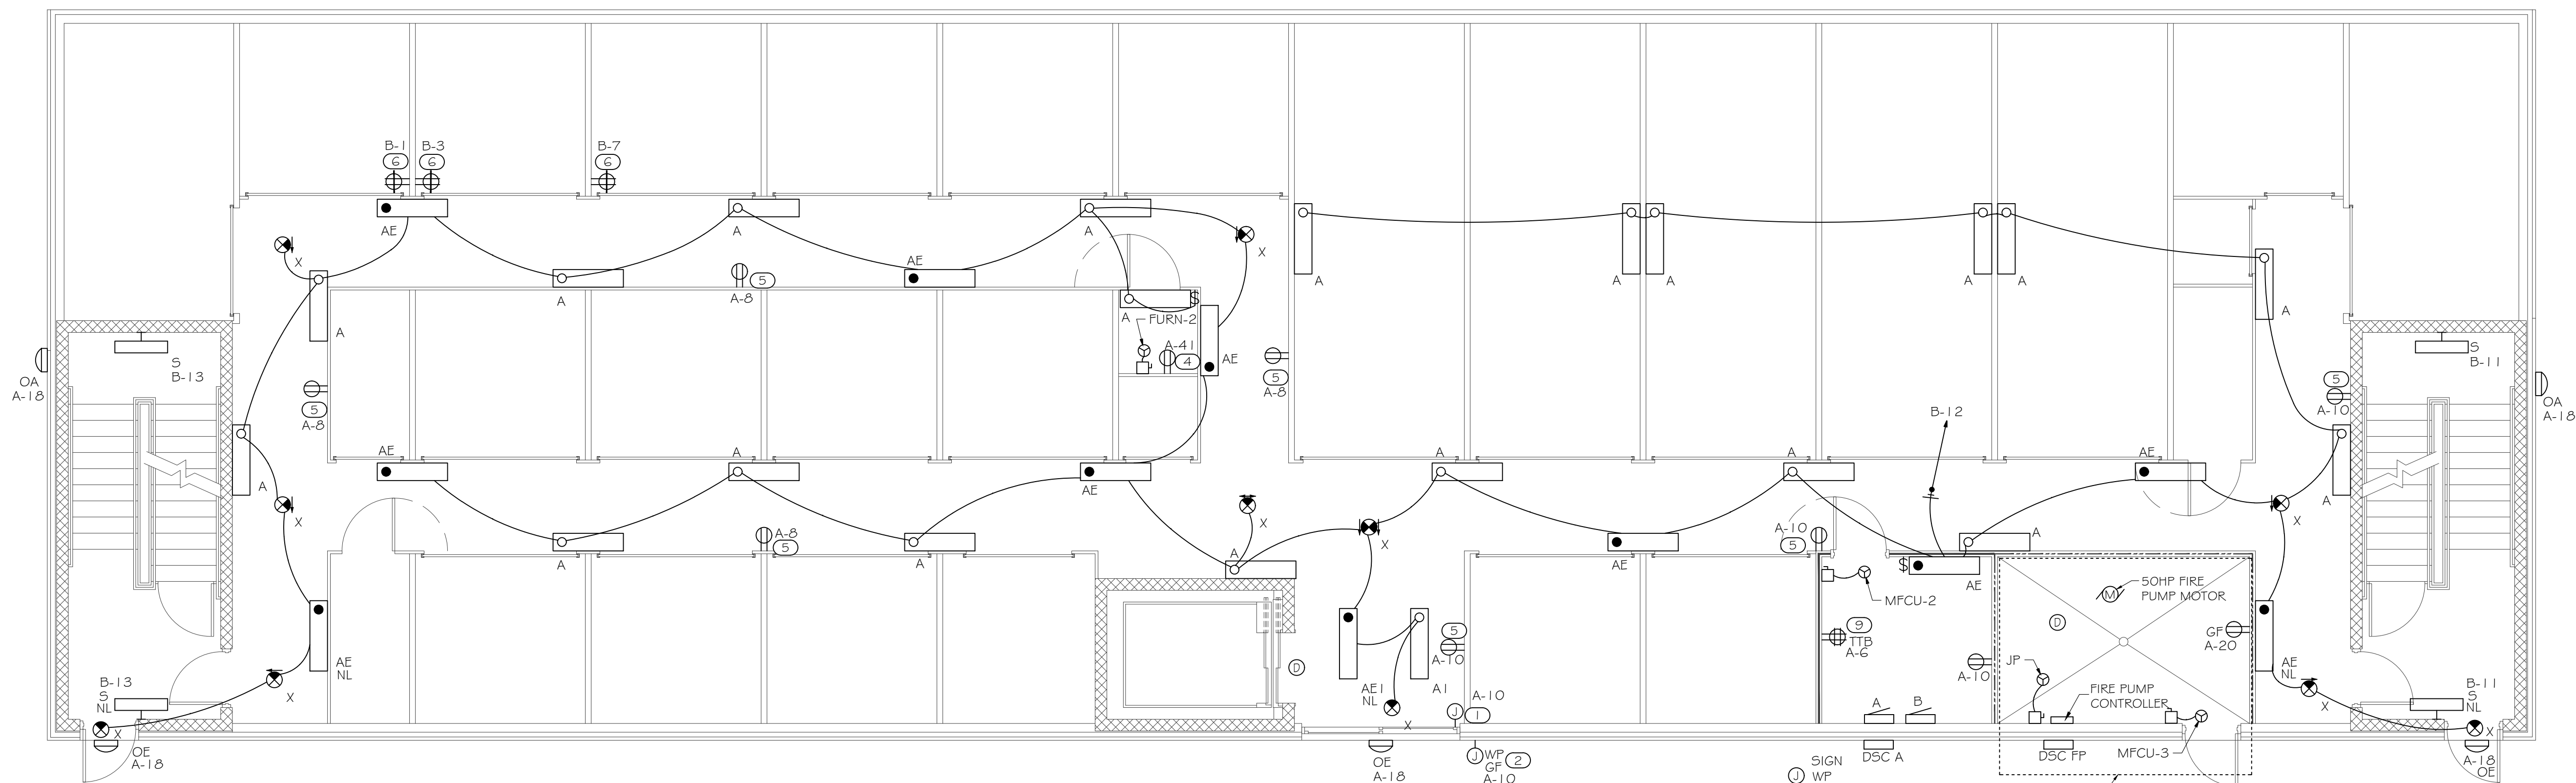

FIRST FLOOR PLAN
SCALE: 3/16" = 1'-0"

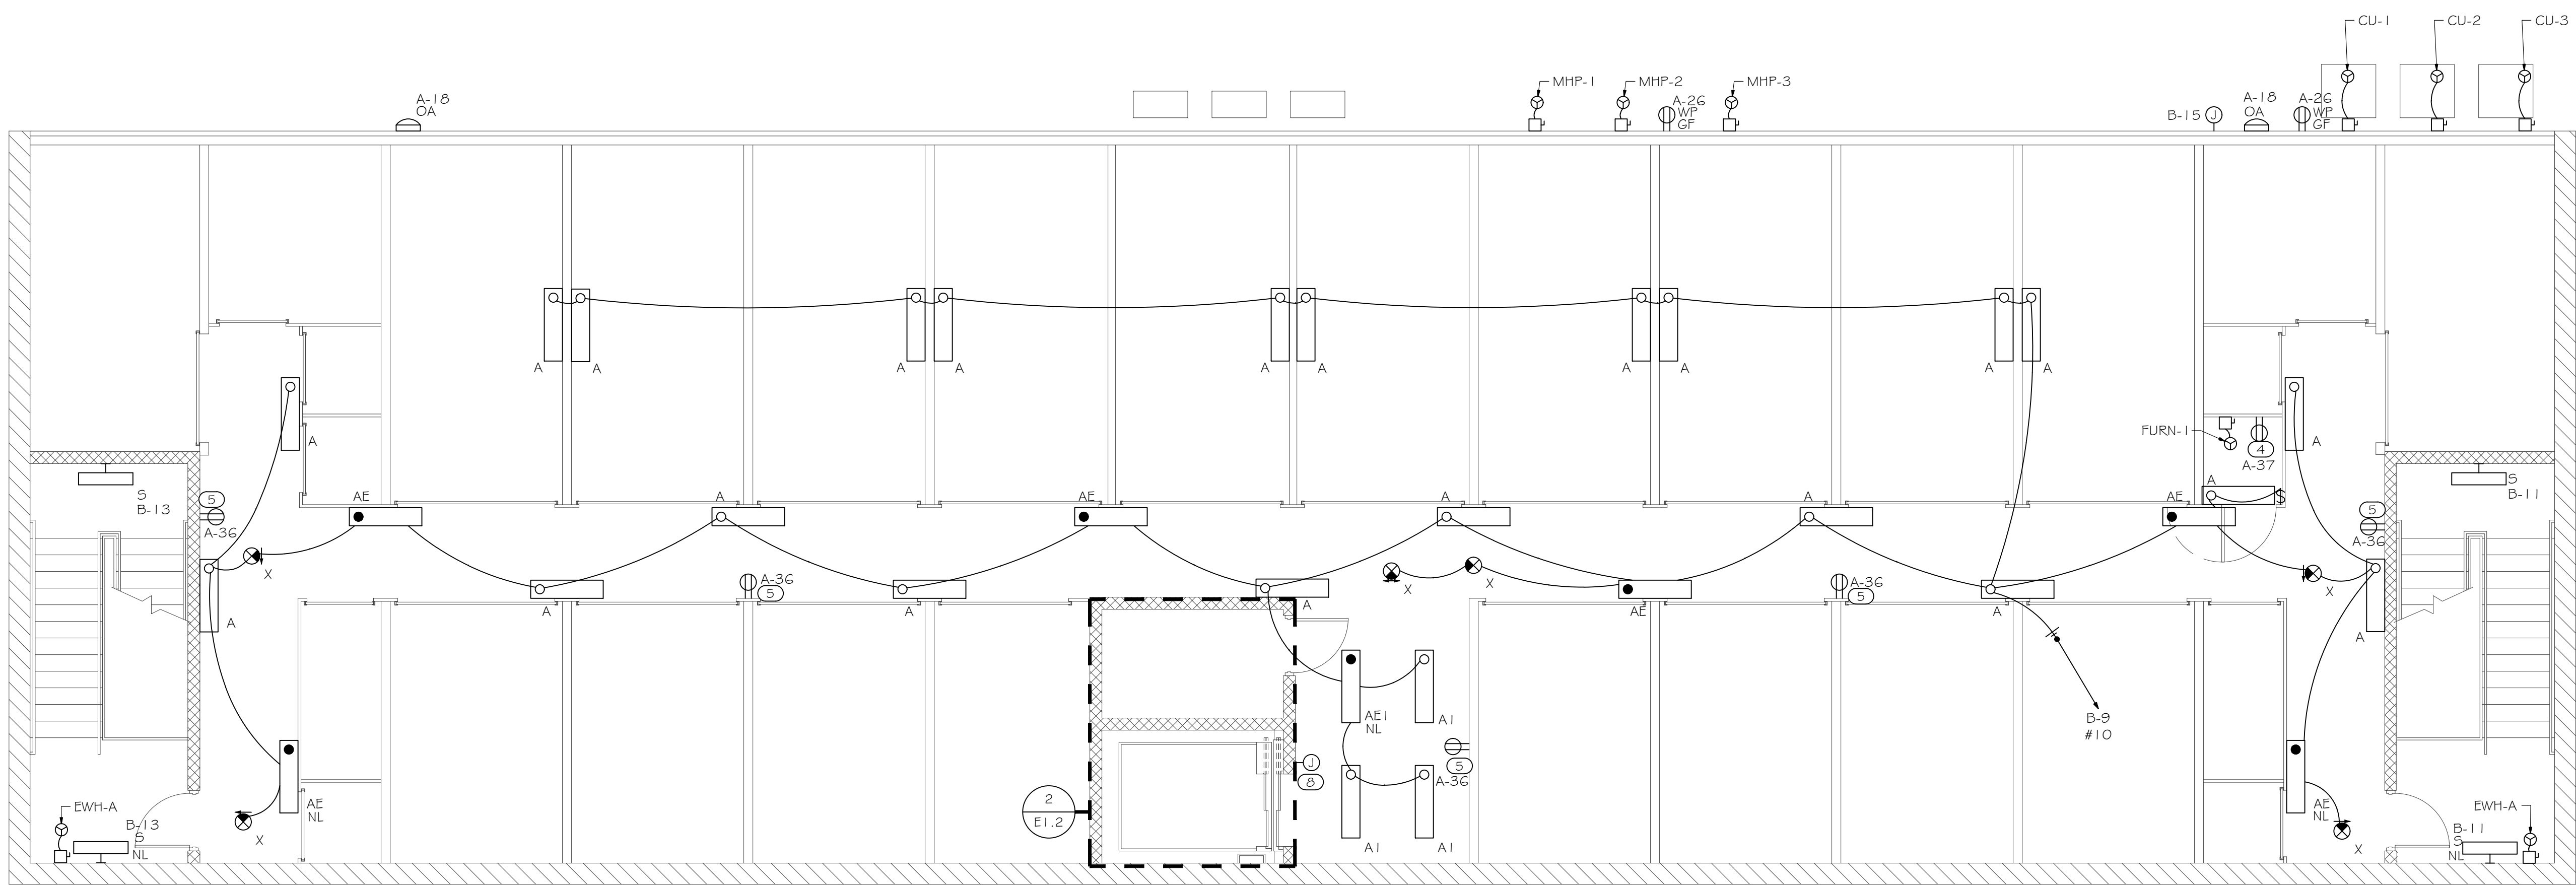

LOWER LEVEL PLAN
SCALE: 3/16" = 1'-0"