



NOTES:

- 1. FOR ADDITIONAL NOTES AND SYMBOLS, SEE GE-E-01.
- 2. UNLESS NOTED OTHERWISE, POLYMER CONCRETE HANDHOLES SHALL BE 12"X12"X24". SEE DRAWING DT-E-03 FOR ADDITIONAL INFORMATION.
- 3. ALL UNDERGROUND CONDUIT SHALL BE SCHEDULE 80 PVC. TRANSITION FROM UNDERGROUND TO ABOVE GROUND CONDUIT USING RIGID GALVANIZED STEEL.
- 4. SEE DRAWING DT-E-03 FOR UNDERGROUND CONDUIT DUCTBANK DETAIL.

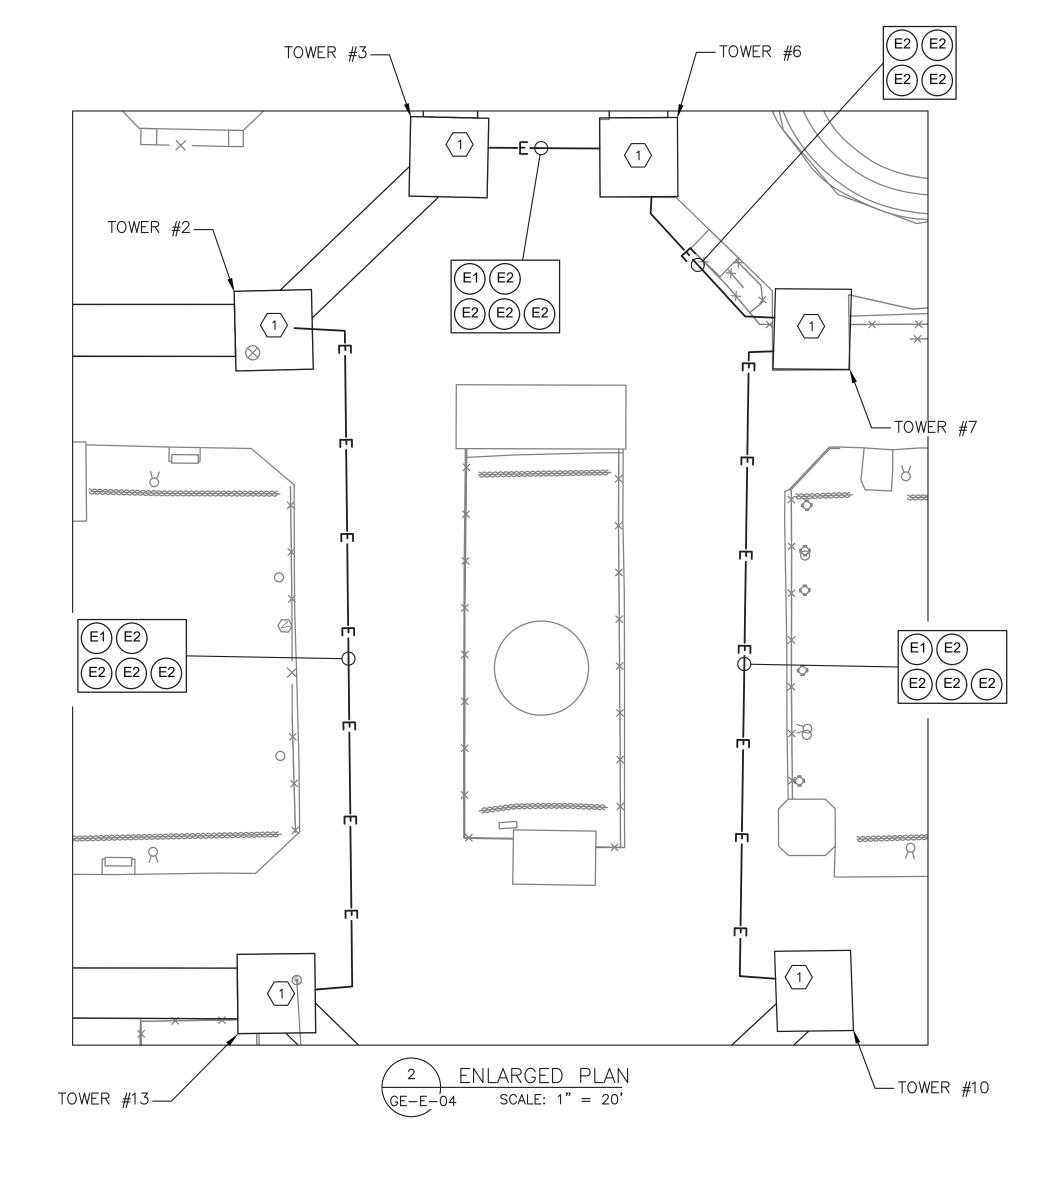


KEY NOTES:

- $\langle 1 \rangle$ TOWER WILL HAVE NEW MANHOLE INSTALLED (SEE MAW-1 ADDENDUM STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION). INCOMING UNDERGROUND CONDUIT WILL BE ROUTED TO NEW MANHOLE. CONTRACTOR IS ADVISED, UNDER THE MEGA 1 PROJECT, UNDERGROUND CONDUIT WILL BE INSTALLED AND CAPPED 8" PAST THE TOWER FOOTPRINT. MEGA 2 CONTRACTOR WILL INTERCEPT (AT THIS POINT) AND INSTALL NEW CONDUIT AS SHOWN.
- $\langle 2 \rangle$ PROVIDE 18" X 18" X 24" POLYMER CONCRETE HANDHOLE AT THIS LOCATION.
- (3) INCOMING UNDERGROUND CONDUIT SHALL BE ROUTED TO ATTIC SPACE OF STRUCTURE. CONCEAL EXPOSED CONDUIT AS MUCH AS PRACTICAL. STUB AND CAP CONDUIT FOR FUTURE USE.



DUCTBANK SCHEDULE		
NAME	CONDUIT SIZE	REMARKS
E1	2"C WITH PULLROPE	AUDIO
E2	2"C WITH PULLROPE	SPARE

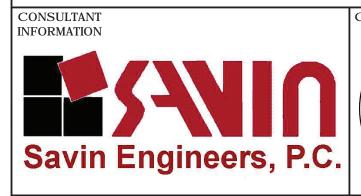

07/02/2021 BID ADDENDUM #3 RKC DF REVISION

RECORD DRAWING CERTIFICATION AS BUILT - CHANGES AS NOTED

CONTRACTOR

SIGNATURE

AS BUILT - NO CHANGES

WESTCHESTER COUNTY, NEW YORK DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION

DIVISION OF ENGINEERING INFRASTRUCTURE REHABILITATION - PHASE 2 PLAYLAND PARK, RYE, NEW YORK

NUMBER NUMBER GE-E-04 20-530 DWG NO.: Page 289 of 290 SCALE: AS SHOWN DATE: **JULY, 2 2021** DPW FILE 1-118-E-676A NUMBER

PROJECT COORDINATOR NAME SIGNATURE

GENERAL DUCT BANK PLAN 1