

- C. Masonry: Demolish in small sections. Cut masonry at junctures with construction to remain, using power-driven saw, and then remove masonry between saw cuts.
- D. Concrete Slabs-on-Grade: Saw-cut perimeter of area to be demolished, and then break up and remove.
- E. Resilient Floor Coverings: Remove floor coverings and adhesive according to recommendations in RFCI's "Recommended Work Practices for the Removal of Resilient Floor Coverings." Do not use methods requiring solvent-based adhesive strippers.
- F. Roofing: Remove no more existing roofing than what can be covered in one day by new roofing and so that building interior remains watertight and weathertight.
  - 1. Remove existing roof membrane, flashings, copings, and roof accessories.
  - 2. Remove existing roofing system down to substrate.

### 3.6 DISPOSAL OF DEMOLISHED MATERIALS

- A. Remove demolition waste materials from Project site and dispose of them in an EPA-approved construction and demolition waste landfill acceptable to authorities having jurisdiction.
  - 1. Do not allow demolished materials to accumulate on-site.
  - 2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
  - 3. Remove debris from elevated portions of building by chute, hoist, or other device that will convey debris to grade level in a controlled descent.

### 3.7 CLEANING

- A. Clean adjacent structures and improvements of dust, dirt, and debris caused by selective demolition operations. Return adjacent areas to condition existing before selective demolition operations began.

END OF SECTION 024119

SECTION 028213 – ASBESTOS ABATEMENT

AT: EAST RAMAPO CSD KITCHEN HOOD REPLACEMENT  
ABATEMENT PROJECT  
105 SOUTH MADISON AVENUE  
SPRING VALLEY, NEW YORK 10977  
SED # 50-04-02-06-7-999-004

OWNER: EAST RAMAPO CENTRAL SCHOOL DISTRICT  
105 SOUTH MADISON AVENUE  
SPRING VALLEY, NEW YORK 10977  
845-577-6000

CONSULTANT: QUALITY ENVIRONMENTAL SOLUTIONS & TECHNOLOGIES, INC. (QUES&T)  
1376 ROUTE 9  
WAPPINGERS FALLS, NEW YORK 12590  
PH. (845) 298-6031  
FX. (845) 298-6251



SPECIFICATION DATED: January 26, 2021

PART I – GENERAL

1.01 DESCRIPTION

- A. All work under this contract shall be performed in strict accordance with the specifications and all applicable laws for asbestos removal projects. The Abatement Contractor shall furnish all labor, materials, supervision, services, insurance, and equipment necessary for the complete and total removal of Asbestos-containing Materials (ACM) as described herein, in attachments to the specification, Job Specific Variance(s) and/or as directed by East Ramapo CSD (here-in-after the "Owner") and/or the Owners Representative(s) to support the to the following East Ramapo CSD projects:

District Wide Kitchen Hood Replacement Project  
East Ramapo CSD  
105 South Madison Avenue  
Spring Valley, New York 10977  
SED # 50-04-02-06-7-999-004

- B. Abatement Contractor shall provide for personnel air monitoring to satisfy OSHA regulation 29 CFR Parts 1926.1101(f). All work performed shall be in strict accordance with applicable provisions and regulations promulgated under New York State Department of Labor, Industrial Code 56 (ICR-56).
- C. The Abatement Contractor shall satisfy the requirements for asbestos projects issued by the New York State Department of Labor concerning licensing and certification; notification; equipment; removal and disposal procedures; engineering controls; work area preparation; decontamination and clean-up procedures; and personnel air monitoring.
- D. The Abatement Contractor shall be responsible for submittal of asbestos project notification(s) and applicable fees to EPA and NYSDOL concerning this project. Project notification(s) shall be made for the cumulative total of ACM to be removed as required by ICR-56-3.4. Work practices for each individual work area established shall be consistent with the quantity of ACM contained within that work area as defined in ICR-56-2.
- E. The scope of work under this contract shall include the following:
1. All asbestos-containing materials (ACM) shall be removed in accordance with these specifications. The Abatement Contractor is responsible for field verification of

estimated quantities, locations and other site conditions that may affect work.

2. All fixed objects remaining within the work area(s) shall be protected as required by Title 12 NYCRR Section 56-7.10(b) and as described in these specifications.
3. The containerization, labeling and disposal of all asbestos waste in accordance with applicable city, state and federal regulations and these specifications.
4. The Abatement Contractor will be responsible for repairing all building components damaged during abatement including, but not limited to, ceiling tiles, ceiling finishes, wall finishes and/or floor finishes, etc.
5. The Abatement Contractor shall be responsible for any and all demolition required to access materials identified in scope of work and on associated drawings.
6. Concealed conditions that are exposed and may require additional work shall be brought to the attention of the Owner(s) immediately. The Abatement Contractor shall not abate these areas without a written notice to proceed. If the Abatement Contractor removes additional asbestos prior to the order to proceed the additional work will not be acknowledged.
7. Permissible working hours shall be Monday through Friday 7:00 A.M. to 4:00 P.M. with one (1) hour for lunch and/or as defined by the Owner. Holidays shall be considered weekends and not included for working days. Upon written approval from the Owner, the Abatement Contractor may work past these hours. The Abatement Contractor will incur any and all costs associated for work performed beyond the defined schedule including, but not limited to: abatement activities, project/air monitoring, custodial/staffing labor, overtime, mobilizations, etc.
8. Buildings will be turned over to the Abatement Contractor as is. At that time, all electrical services and HVAC systems in the proposed work areas will be shut down. Electricity and water supply will be maintained in the building for use by the Abatement Contractor. The Abatement Contractor is responsible for securing all power in the work area(s) and establishing all temporary GFCI hookups necessary to complete his work.
9. The Abatement Contractor shall remove identified asbestos-containing floor coverings to the building substrate beneath; in areas indicted. Subsequent to final air clearances, the substrate(s) shall be washed with a neutralizing agent to prepare the substrate to accept new floor covering and eliminate residual odors.
10. The Abatement Contractor must coordinate location of waste containers with the Facility and the Owner. Deliveries and storage of equipment must be coordinated with the Facility and the Owner.

11. All "Large" and "Small" asbestos abatement projects, as defined by 12 NYCRR56 shall not be performed while the building is occupied. The term "building" means a wing or major section of a building that can be completely isolated from the rest of the building with sealed non-combustible construction. The isolated portion of the building must contain exists that do not pass through the occupied portion(s) and ventilation systems must be physically separated and sealed at the isolation barriers.

#### 1.02 PRE-CONTRACT SUBMITTALS

Within three (3) days after bids are opened, the three (3) apparent low bidders shall be required to submit the following documentation:

##### A. Resume': Shall include the following:

1. Provide a list of projects of similar nature performed within the past two (2) years and include the dollar value of all projects. Provide project references to include owner, consultant, and air monitoring firms' name, contact person, address, and phone number, include location of project and date of completion.
2. Abatement Contractor license issued by New York State Department of Labor for asbestos work in accordance with ICR-56-3.
3. A list of owned equipment available to be used in the performance of the project.
4. The number of years engaged in asbestos removal.
5. An outline of the worker training courses and medical surveillance program conducted by the Abatement Contractor.
6. A standard operating procedures manual describing work practices and procedures, equipment, type of decontamination facilities, respirator program, special removal techniques, etc.
7. Documentation to the satisfaction of the Owner pertaining to the Abatement Contractor's financial resources available to perform the project. Such data shall include, but not be limited to, the firm's balance sheet for the last fiscal year.

##### B. Citations/Violations/Legal Proceedings

1. Submit a notarized statement describing any citations, violations, criminal charges, or legal proceedings undertaken or issued by any law enforcement, regulatory agency, or consultant concerning performance on previous asbestos abatement contracts. Briefly describe the circumstances citing the project and involved persons and agencies as well

as the outcome of any actions.

2. Answer the question: "Has your firm or its agents been issued a Stop Work order on any project within the last two years?" If "Yes" provide details as discussed above.
3. Answer the question: "Are you now, or have you been in the past, a party to any litigation or arbitrations arising out of your performance on Asbestos Abatement Contracts?" If "Yes" provide details as discussed in 1. above.
4. Describe any liquidated damages assessed within the last two years.

#### C. Preliminary Schedule

1. Provide a detailed schedule including work dates, work shift times, estimate of manpower to be utilized and the start and completion date for completion of each major work area.

#### 1.03 DOCUMENTATION

- A. The Abatement Contractor shall be required to submit the following and receive the Consultant's approval prior to commencing work on this project:
  1. Provide documentation of worker training for each person assigned to the project. Documentation shall include copies of each workers valid New York State asbestos handler certificates (for those employees who may perform asbestos removal), documentation of current respirator fit test and current OSHA required training and medical examination.
  2. The attached "Asbestos Employee Medical Examination Statement" and "Asbestos Employee Training Statement" forms shall be completed, signed and submitted for each worker assigned to the project. Records of all employee training and medical surveillance shall be maintained for at least forty (40) years. Copies of the records shall be submitted to the Consultant prior to commencement.
  3. The Abatement Contractor shall submit proof of a current, valid license issued by the New York State Department of Labor pursuant to the authority vested in the Commissioner by section 906 of the Labor Laws, and that the employees performing asbestos related work on this project are certified by the State of New York as required in Part 56 of Title 12 of the Official Compilation of Codes, Rules and Regulations of the State of New York latest edition. Copies of all licenses shall be submitted prior to the commencement of the project.
  4. The Abatement Contractor shall submit a written respiratory protection program meeting the requirements of 29 CFR 1910.134 to the Consultant.

5. The name, address, social security number and NYS DOL certificate number of the person(s) who will supervise the asbestos project.
6. The name and address of the deposit or waste disposal site or sites where the asbestos materials are to be deposited or disposed of. This site must be approved by the Owner. The manifesting procedure must also be specified.
7. The name, address and New York State Dept. of Environmental Conservation ID Number of any transporters that are to be used to transport waste.
8. A written Standard Operation Procedure (SOP) that is designed and implemented to maximize protection against human exposure to asbestos dust. The SOP shall take into consideration the workers, visitors, building employees, general public and environment. As a minimum the procedures must include the following:
  - a. Security for all work areas on an around-the-clock basis against unauthorized access.
  - b. Project organization chart including the phone numbers of at least two responsible persons who shall be authorized to dispatch men and equipment to the project in the event of an emergency; including weekends.
  - c. Description of protective clothing and NIOSH approved respirators to be used.
  - d. Description of all removal methods to be used, including HEPA air filtration and decontamination sequence with special emphasis on any procedure that may deviate from these specifications.
  - e. A list of manufacturers' certificates stating that all vacuums, negative air filtration equipment, respirators and air supply equipment meet OSHA and EPA requirements.
  - f. A list of all materials proposed to be furnished and used under this contract.
  - g. Emergency evacuation procedures in the event of fire, smoke, or accidents such as injury from falling, heat exposure, electrical shock, etc.
  - h. The name, address and ELAP number of the New York State Department of Health Certified Analytical Testing Laboratory the Contractor proposes to use for the OSHA monitoring.
9. A detailed plan, in triplicate, for the phasing of the project, division of work areas and location of decontamination facilities, waste containers and temporary office.
10. Work schedule, identifying firm dates and completion for actual areas. Bar chart or critical path chart indicating phases is required.

- B. The Abatement Contractor shall post their NYS DOL contractor's license and maintain a daily log documenting the dates and time of the following items within each personal decontamination unit:
1. Meetings; purpose, attendants, discussion (brief)
  2. Sign-in and sign-out of all persons entering the work area including name, date, time, social security number, position or function and general description of daily activity.
  3. Testing of barriers and enclosure systems using smoke tubes prior to the beginning of abatement activities and at least once a day thereafter until satisfactory clearance air monitoring results have been achieved.
  4. Inspection of all plastic barriers, twice daily, by the asbestos supervisor.
  5. Loss of enclosure integrity; special or unusual events, barrier breaches, equipment failures, etc.
  6. Daily cleaning of enclosures.
  7. Personnel air monitoring test results for OSHA Compliance. Results shall be posted at the work site within 24 hours of testing and copies supplied to the Owner within five (5) days of testing. Abnormalities shall be supplied to the Owner immediately.
- C. Documentation with confirmation signature of Consultant's representative of the following shall be provided by the Abatement Contractor at the final closeout of the project.
1. Testing of barriers and enclosure systems using smoke tubes shall be performed prior to the beginning of abatement activities and at least once a day thereafter until satisfactory clearance air monitoring results have been achieved.
  2. Inspection of all plastic barriers.
  3. Removal of all polyethylene barriers.
  4. Consultant's inspections prior to encapsulation.
  5. Removal of waste materials.
  6. Decontamination of equipment (list items).
  7. Consultant's final inspection/final air tests.
- D. The Abatement Contractor shall provide records of all project information, to include the following which shall be submitted upon completion of the project and prior to approval of

the Abatement Contractor's payment application:

1. The location and description of the abatement project.
2. The name, address, and social security number of the person(s) who supervised the asbestos project.
3. Certified payroll documentation Pursuant to Article 8, Section 220 of the NYS Labor Law
4. Copies of EPA/NYS DOL Asbestos Certificates for all Workers and Supervisors employed on the Project.
5. Copies of Medical Approval and Respirator Fit-testing for all Asbestos Workers and Supervisors employed on the Project.
6. Copies of Abatement Contractors Daily Sign-In Sheets & Logs for persons entering and leaving the work area. – Title 12 NYCRR Part 56-7.3.
7. Copies of Abatement Contractor's personal air sampling laboratory results.
8. The amounts and type of asbestos materials that was removed, enclosed, encapsulated, or disturbed.
9. The name and address of the deposit or waste disposal site or sites where the asbestos waste materials were deposited or disposed of and all related manifests, receipts and other documentation associated with the disposal of asbestos waste.
10. The name and address of any transporters used to transport waste and all related manifests, receipts and other documentation associated with the transport of asbestos waste.
11. All other information that may be required by state, federal or local regulations.
12. Copy of the Supervisor's Daily Project Log of events as described in 1.03 B, above.

#### 1.04 NOTIFICATIONS AND PERMITS

- A. The Abatement Contractor shall be required to prepare and submit notifications to the following agencies at least ten (10) days prior to the commencement of the project:
  1. Asbestos NESHAPS Contact  
U.S. Environmental Protection Agency  
NESHAPS Coordinator, Air Facilities Branch  
26 Federal Plaza

New York, New York 10007  
(212) 264-7307

2. State of New York Department of Labor  
Division of Safety and Health  
Asbestos Control Bureau  
State Office Building Campus, Building 12, Room 454  
Albany, New York 12240
3. Owner(s): East Ramapo CSD  
105 South Madison Avenue  
Spring Valley, New York 10977  
ATTN: Adam Rubin  
Ph. (845) 577-6480  
E-mail. [arubin@ercsd.org](mailto:arubin@ercsd.org)
4. Owner's Representative(s): CS Arch  
19 Front Street  
Newburgh, NY 12550  
ATTN: Tom Ritzenthaler  
Ph. (845) 561-3179  
E-mail. [tritzenthaler@csarchpc.com](mailto:tritzenthaler@csarchpc.com)
5. Environmental Consultant(s): Quality Environmental Solutions & Technologies, Inc.  
(QuES&T)  
1376 Route 9  
Wappingers Falls, New York 12590  
ATTN: Gregory Dean  
Ph. (845) 298-6031  
Fx. (845) 298-6251  
E-mail. [GDean@qualityenv.com](mailto:GDean@qualityenv.com)

B. The notification shall include but not be limited to the following information:


1. Name and address of Owner.
2. Name, address, and asbestos handling license number of the Abatement Contractor.
3. Address and description of the building, including size, age, and prior use of the building or area; the amount, in square feet or linear feet of asbestos material to be removed; room designation numbers or other local information where asbestos material is found, including the type of asbestos material (friable or non-friable).
4. Scheduled starting and completion dates for removal.

5. Methods to be employed in abating asbestos containing materials.
6. Procedures and equipment, including ventilating/exhaust systems, that will be employed to comply with the Code of Federal Regulation (CFR) Title 40, Part 61 of the U.S. Environmental Protection Agency.
7. The name and address of the carting company and of the waste disposal site where the asbestos waste will be deposited.

NOTE: Notifications shall be submitted using standard forms as may be used by the respective agency.

For DOL (NYS) include "Asbestos Project Notification" form (DOSHS-483) with proper fee, if required. For EPA include "Notification of Demolition and Renovation"; 40 CFR Part 61.

- C. The Abatement Contractor shall secure any permits required by the city, town, county, or state that may be required and the cost for obtaining the permit shall be included in his base bid.
- D. The Abatement Contractor shall erect warning signs around the work space at every point of potential entry into the work area in accordance with OSHA 1926.58k (2), (i). These signs shall bear the following information:

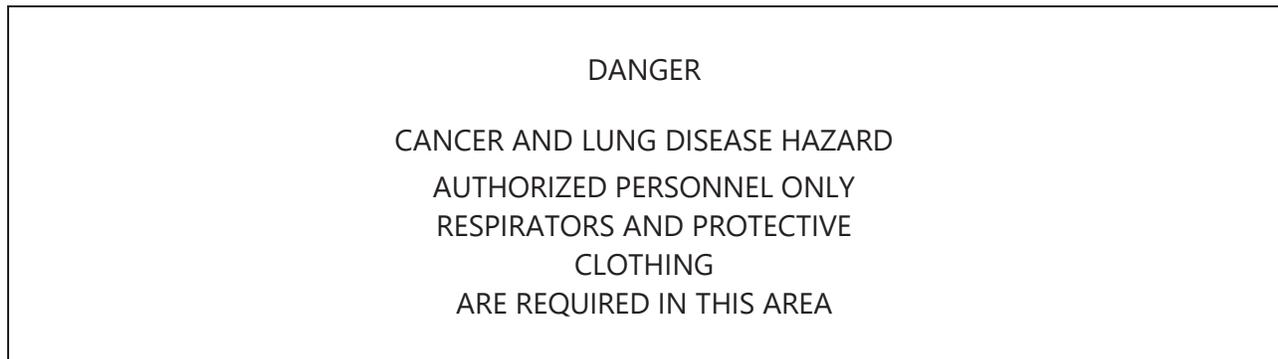

- E. The Abatement Contractor shall post at entrances to the work place and immediate adjacent areas, notifications to building occupants, which include the name and license number of the contractor, project location and size, amount and type of ACM, abatement procedures, dates of expected occurrence and name and address of the air monitor and laboratory in compliance with ICR 56-3.6.
- F. The Abatement Contractor shall post a list of emergency telephone numbers at the job site which shall include the Owner's Representative, police, emergency squad, local hospital, Environmental Protection Agency, N.Y. State Department of Labor, Occupational Safety

and Health Administration and the local Department of Health.

#### 1.05 APPLICABLE STANDARDS

Except to the extent that more explicit or more stringent requirements are written directly into the contract documents, applicable standards of the construction industry have the same force and effects (and are made a part of contract documents by reference) as if copied directly into contract documents, or as if published copies were bound herewith. Resolution of overlapping and conflicting requirements, which result from the application of several different industry standards to the same unit of work, shall be by adherence to the most stringent requirement.

A. Applicable standards listed in these Specifications form a part of this Specification and include, but are not necessarily limited to, standards promulgated by the following agencies and organizations:

1. ANSI:  
American National Standards Institute  
1430 Broadway  
New York, New York 10018
2. ASHRAE:  
American Society for Heating, Refrigerating  
and Air Conditioning Engineers  
1791 Tullie Circle NE  
Atlanta, Georgia 30329
3. ASTM:  
American Society for Testing and Materials  
1916 Race Street  
Philadelphia, Pennsylvania 19103
4. CFR  
Code of Federal Regulations Available  
from Government Printing Office  
Washington, District of Columbia 20402
5. CGA  
Compressed Gas Association  
1235 Jefferson Davis Highway  
Arlington, Virginia 22202
6. CS  
Commercial Standard of NBS  
(US Dept. of Commerce)

Government Printing Office

7. EPA

Environmental Protection Agency, Region II  
26 Federal Plaza  
New York, New York 10007  
Asbestos Coordinator - Room 802  
(212) 264-9538  
Part 61, Sub-Parts A & B  
National Emission Standard for Asbestos

8. FEDERAL SPECS

Federal Specification (General Services Administration)  
7th and D Street, SW  
Washington, District of Columbia 20406

9. NBS

National Bureau of Standards  
(US Department of Commerce)  
Gaithersburg, Maryland 20234

10. NEC

National Electrical Code (by NFPA)

11. NFPA

National Fire Protection Association  
Batterymarch Park  
Quincy, Massachusetts 02269

12. NIOSH

National Institute for Occupational Safety and Health  
26 Federal Plaza  
New York, New York 10007

13. NYSDOH

New York State Department of Health  
Bureau of Toxic Substance Assessment  
Room 359 - 3rd Floor  
Tower Building Empire State Plaza  
Albany, New York 12237

14. NYSDEC

New York State Department of Environmental Conservation  
Room 136

50 Wolf Road  
Albany, New York 12233-3245

15. NYSDOL

State of New York Department of Labor  
Division of Safety and Health  
Asbestos Control Program  
State Campus, Building 12  
Albany, New York 12240

16. OSHA

Occupational Safety and Health Administration  
(US Department of Labor)  
New York Regional Office - room 3445  
1515 Broadway  
New York, New York 10036

17. UL

Underwriters Laboratories  
333 Pfingsten Road  
Northbrook, Illinois 60062

B.Federal Regulations: Those which govern asbestos abatement work or hauling and disposal of asbestos waste materials:

1. U.S. Department of Labor, Occupational Safety and Health Administration, (OSHA):

- a. Asbestos Regulations  
Title 29, Part 1910, of the Code of Federal Regulations.
- b. Respiratory Protection  
Title 29, Part 1910, Section 134 of the Code of Federal Regulations.
- c. Construction Industry  
Title 29, Part 1926, of the Code of Federal Regulations.
- d. Access to Employee Exposure & Medical Records  
Title 29, Part 1910, Section 20 of the Code of Federal Regulations.
- e. Hazard Communication  
Title 29, Part 1910, Section 1200 of the Code of Federal Regulations.
- f. Specifications for Accident Prevention Signs and Tags  
Title 29, Part 1910, section 145 of the Code of Federal Regulations.

2. U.S. Environmental Protection Agency (EPA):
  - a. Asbestos Hazard Emergency Response Act (AHERA) Regulation Asbestos Containing Materials in Schools Final Rule & Notice Title 40, Part 763, Subpart E of the Code of Federal Regulations.
  - b. Worker Protection Rule  
40 CFR Part 763, Subpart G, CPTS 62044, FLR 2843-9  
Federal Register, Vol. 50, No. 134, 7/12/85, P28530-28540
  - c. Regulation for Asbestos  
Title 40, Part 61, Subpart A of the Code of Federal Regulations
  - d. National Emission Standard for Asbestos  
Title 40, Part 61, Subpart M (Revised Subpart B) of the Code of Federal Regulations
  - e. Resource Conservation and Recovery Act (RCRA) 1976, 1980  
Hazardous and Solid Waste Amendments (HSWA) 1984  
Subtitle D, Subtitle C
3. U.S. Department of Transportation (DOT):
  - a. Hazardous Substances: Final Rule Regulation 49 CFR, Part 171 and 172.
- C. State Regulations: Those which govern asbestos abatement work or hauling and disposal of asbestos waste materials:
  1. New York State Department of Environmental Conservation (DEC) Regulations regarding waste collection registration. Title 6, Part 364 of the New York State Official Compilation of Codes, Rules and Regulations - 6NYCRR 364.
  2. New York State Right-To-Know Law
  3. New York State Department of Labor Asbestos Regulations Industrial Code Rule 56.
  4. NYSDOH Title 10 Part 73 – Asbestos Safety Program and Environmental Laboratory Approval Program.
- D. Standards: Those which govern asbestos abatement work or hauling and disposal of asbestos waste materials:
  1. American National Standards Institute (ANSI)
    - a. Fundamentals Governing the Design and Operation of Local Exhaust Systems

Publication Z9.2-79

b. Practices for Respiratory Protection  
Publication Z88.2-80

E. Guidance Documents: Those that discuss asbestos abatement work or hauling, and disposal of asbestos waste materials are listed below only for the Abatement Contractor's information. These documents do not describe the work and are not a part of the work of this contract.

EPA:

1. Guidance for Controlling Asbestos Containing Materials in Buildings (Purple Book)  
EPA560/5-85-024.
2. Asbestos Waste Management Guidance EPA 530-SW-85-007.

F. Patents and Royalties: The Abatement Contractor shall pay all royalties and/or license fees. The Abatement Contractor shall defend all suits and claims for infringement of any patent rights and save the Owner and Consultant harmless from loss including attorney fees on account thereof.

## 1.06 DEFINITIONS

As used in or in connection with these specifications the following are terms and definitions.

Abatement - Procedure to control release from asbestos material. This includes removal, encapsulation, and enclosure.

Aggressive sampling - A method of sampling in which the person collecting the air sample creates activity by the use of mechanical equipment during the sampling period to stir up settled dust and simulate activity in that area of the building.

AIHA - The American Industrial Hygiene Association, 475 Wolf Ledges Parkway, Akron, Ohio 44311.

Airlock - A system for permitting entrance and exit while restricting air movement between a containment area and an uncontaminated area. It consists of two curtained doorways separated by a distance of at least three feet such that one passes through one doorway into the airlock, allowing the doorway sheeting to overlap and close off the opening before proceeding through the second doorway, thereby preventing flow-through contamination.

Air sampling - The process of measuring the content of a known volume of air collected during a specific period of time.

Amended water - Water to which a surfactant has been added.

Approved asbestos safety program - A program approved by the Commissioner of Health providing training in the various disciplines that may be involved in an asbestos project.

Area air sampling - Any form of air sampling or monitoring where the sampling device is placed at some stationary location.

Asbestos - Any naturally occurring hydrated mineral silicate separable into commercially usable fibers, including chrysotile (serpentine), amosite (cumingtonite-gunerite), crocidolite (riebeckite), tremolite, anthophyllite and actinolite.

Asbestos contract - An oral or written agreement contained in one or more documents for the performance of work on an asbestos project and includes all labor, goods and service.

Asbestos handler - An individual who installs, removes, applies, encapsulates, or encloses asbestos or asbestos material, or who disturbs friable asbestos. Only individuals certified by NYS Department of Labor shall be acceptable for work under this specification.

Asbestos handling certificate - A certificate issued by the Commissioner of Labor of the State of New York, to a person who has satisfactorily completed an approved asbestos safety program.

Asbestos project - Work undertaken by a contractor which involves the installation, removal, encapsulation, application or enclosure of any ACM or the disturbance of friable ACM.

Asbestos Safety Technician (AST) - Individual designated to represent the Consultant, perform third party monitoring and perform compliance monitoring at the job site during the asbestos project.

Asbestos waste material - Asbestos material or asbestos contaminated objects requiring disposal.

Authorized visitor - The building owner, his or her representative or any representative of a regulatory or other agency having jurisdiction over the project.

Background level monitoring - A method used to determine ambient airborne concentrations inside and outside of a building or structure prior to starting an abatement project.

Building owner - The person in whom legal title to the premises is vested unless the premises are held in land trust, in which instance Building Owner means the person in whom beneficial title is vested.

Clean room - An uncontaminated area or room that is a part of the personal decontamination enclosure with provisions for storage of persons' street clothes and protective equipment.

Cleanup - The utilization of HEPA vacuuming to control and eliminate accumulations of asbestos material and asbestos waste material.

Clearance air monitoring - The employment of aggressive sampling techniques with a volume of air collected to determine the airborne concentration of residual fibers upon conclusion of an asbestos abatement project.

Commissioner - Commissioner of the New York State Department of Labor.

Contractor - A company, unincorporated association, firm, partnership or corporation and any owner or operator thereof, which engages in an asbestos project or employs persons engaged in an asbestos project.

Curtained doorway - A device that consists of at least three overlapping sheets of plastic over an existing or temporarily framed doorway. One sheet shall be secured at the top and left side, the second sheet at the top and right side, and the third sheet at the top and the left side. All sheets shall have weights attached to the bottom to insure that the sheets hang straight and maintain a seal over the doorway when not in use.

Decontamination enclosure system - A series of connected rooms, separated from the work area and from each other by air locks, for the decontamination of persons, materials, equipment, and authorized visitors.

Encapsulant (sealant) or encapsulating agent - A liquid material that can be applied to asbestos material and which prevents the release of asbestos from the material by creating a membrane over the surface.

Enclosure - The construction of airtight walls, ceilings and floors between the asbestos material and the facility environment, or around surfaces coated with asbestos materials, or any other appropriate procedure that prevents the release of asbestos materials.

Equipment room - A contaminated area or room that is part of the personal decontamination enclosure system with provisions for the storage of contaminated clothing and equipment.

Fixed object - A unit of equipment, furniture or other fixture in the work area which cannot be readily removed from the work area.

Friable Asbestos Material - That condition of crumbled, pulverized, powdered, crushed or exposed asbestos capable of being released into the air by hand pressure.

Friable material containment - The encapsulation or enclosure of any friable asbestos material.

Glovebag technique - A method for removing asbestos material from heating, ventilating, and air conditioning (HVAC) ducts, piping runs, valves, joints, elbows, and other nonplanar surfaces in a noncontained work area. The glovebag assembly is a manufactured device consisting of a glovebag constructed of at least six mil transparent plastic, two inward-projecting longsleeve gloves, which may contain an inward projecting waterwand sleeve, an internal tool pouch, and an attached, labeled receptacle or portion for asbestos waste. The glovebag is constructed and installed in such a manner that it surrounds the object or area to be decontaminated and to contain all asbestos fibers released during the abatement process.

HEPA filter - A high efficiency particulate air filter capable of trapping and retaining 99.97 percent of particulate greater than 0.3 microns equivalent aerodynamic diameter.

HEPA vacuum equipment - Vacuuming equipment with a high efficiency particulate air filtration system.

Holding area - A chamber in the waste decontamination enclosure located between the washroom and an adjacent uncontaminated area.

Homogeneous work area - A site within the abatement work area that contains one type of asbestos material and where one type of abatement is used.

Large asbestos project - An asbestos project involving the installation, removal, disturbance, enclosure, or encapsulation of 160 square feet or more of asbestos or asbestos material or 260 linear feet or more of asbestos or asbestos material.

Minor asbestos project - An asbestos project involving the installation, removal, disturbance, enclosure, or encapsulation of 10 square feet or less of asbestos or asbestos material, or 25 linear feet or less of asbestos or asbestos material.

Movable object - A unit of equipment, furniture or fixture in the work area that can be readily removed from the work area.

Negative air pressure equipment - A local exhaust system equipped with HEPA filtration. The system shall be capable of creating and maintaining a negative pressure differential between the outside and the inside of the work area.

Non-asbestos material - Any material containing one percent or less asbestos by weight.

Occupied area - Any frequented portion of the work site where abatement is not taking place.

Outside air - The air outside the building or structure.

Personal air monitoring - A method used to determine an individual's exposure to airborne contaminants. The sample is collected outside the respirator in the person's breathing zone.

Plasticize - To cover floors, walls, ceilings and other surfaces with 6 mil fire retardant plastic sheeting as herein specified.

Project - Any form of work performed in connection with the abatement of asbestos or alteration, renovation, modification or demolition of a building or structure that may disturb asbestos or asbestos material.

Removal - The stripping of any asbestos material.

Repair - Corrective action using required work practices to control fiber release from damaged areas.

Respiratory protection - Respiratory protection required of licensed asbestos workers and authorized visitors in accordance with the applicable laws.

Satisfactory clearance air monitoring results - For all post-abatement samples, airborne concentrations of total fibers that are less than 0.01 fibers per cubic centimeter or background levels, whichever are greater, using phase contrast microscopy (PCM).

Shower room - A room between the clean room and the equipment room in the personal decontamination enclosure with hot and cold running water controllable at the top and arranged for complete showering during decontamination.

Small asbestos project - An asbestos project involving the installation, removal, disturbances, enclosure, or encapsulation of more than 10 and less than 160 square

feet of asbestos or asbestos material of more than 25 and less than 260 linear feet of asbestos or asbestos material.

Staging area - The area near the waste transfer airlock where containerized asbestos waste has been placed prior to removal from the work area.

Surfactant - A chemical wetting agent added to water to improve its penetration.

Visible emissions - An emissions of particulate material that can be seen without the aid of instruments.

Washroom - A room between the work area and the holding area in the waste decontamination enclosure system, where equipment and waste containers are wet cleaned and/or HEPA vacuumed.

Waste decontamination enclosure system - An area, consisting of a washroom and a holding area, designated for the controlled transfer of materials and equipment.

Wet cleaning - The process of eliminating asbestos contamination from surfaces, equipment or other objects by using cloths, mops, or other cleaning tools.

Work area - Designated rooms, spaces, or areas where asbestos abatement takes place.

Work site - Premises where asbestos abatement is taking place.

Work Surface - Substrate surface from which asbestos-containing material has been removed.

#### 1.07 UTILITIES, SERVICE AND TEMPORARY FACILITIES

- A. The Owner shall make available to the Abatement Contractor all reasonable amounts of water and electrical power at no charge.
- B. The Abatement Contractor shall provide, at his own expense, all electrical, water, and waste connections, extensions, and construction materials, supplies, etc. All connections must be approved in advance by the Owner and all work relative to the utilities must be in accordance with the applicable building codes.
- C. The Abatement Contractor shall provide scaffolding, ladders and staging, etc. as necessary to accomplish the work of this contract. The type, erection and use of all scaffolding, ladders and staging, etc. shall comply with all applicable OSHA provisions.
- D. All connections to the Owner's water system shall include reduced pressure backflow protection or double check and double gate valves. Valves shall be temperature and

pressure rated for operation of the temperatures and pressures encountered. After completion of use, connections and fittings shall be removed without damage or alteration to existing water piping and equipment. Leaking or dripping valves shall be piped to the nearest drain or located over an existing sink or grade where water will not damage existing finishes or equipment.

- E. The Abatement Contractor shall use only heavy-duty abrasion resistant hoses with a pressure rating greater than the maximum pressure of the water distribution system to provide water to each work area and to each decontamination unit. Provide fittings as required to allow for connection to existing wall hydrants or spouts, as well as temporary water heating equipment, branch piping, showers, shut-off nozzles and equipment. All water must be shut off at the end of each shift.
- F. The Abatement Contractor shall provide service to decontamination unit electrical subpanel with minimum 60 amp, 2 pole circuit breaker or fused disconnect and ground-fault circuit interrupters (GFCI), reset button and pilot light, connected to the building's main distribution panel. Subpanel and disconnect shall be sized and equipped to accommodate all electrical equipment required for completion of the work. This electrical subpanel shall be used for hot water heater, PAPR battery recharging and air sampling pumps.
- G. The Abatement Contractor shall provide UL rated 40-gallon electric hot water heater to supply hot water for the decontamination unit shower. Activate from 30 amp circuit breaker on the electrical subpanel located within the decontamination unit. Provide with relief valve compatible with water heater operation; relief valve down to drip pan on floor with type L copper. Wiring of the hot water heater shall be in compliance with NEMA, NEC, and UL standards.
- H. The Abatement Contractor shall provide identification warning signs at power outlets, which are other than 110-120 volt power. Provide polarized outlets for plug-in type outlets, to prevent insertion of 110-120 plugs into higher voltage outlets. Dry transformers shall be provided where required to provide voltages necessary for work operations. All outlets or power supplies shall be protected by ground fault circuit interrupter (GFCI) at the power source.
- I. The Abatement Contractor shall use only grounded extension cords; use "hard-service" cords where exposed to abrasion and traffic. Use single lengths or use waterproof connectors to connect separate lengths of electric cords, if single lengths will not reach areas of work.
- J. The Abatement Contractor shall provide general service incandescent lamps of wattage indicated or required for adequate illumination; Protect lamps with guard cages or tempered glass enclosures; Provide exterior fixtures where fixtures are exposed to moisture.

- K. The Abatement Contractor shall provide temporary heat or air conditioning as necessary to maintain comfortable working temperatures inside and immediately outside the work areas. Heating and A/C equipment shall have been tested and labeled by UL, FM or another recognized trade association related to the fuel being used. Fuel burning heaters shall not be used inside containment areas. The Contractor shall also provide a comfortable working environment for occupied areas that are impacted by the asbestos removal.
- L. The Abatement Contractor shall comply with recommendations of the NFPA standard in regard to the use and application of fire extinguishers. Locate fire extinguishers where they are most convenient and effective for their intended purpose, but provide not less than one extinguisher in each work area, equipment room, clean room and outside the work area

#### 1.08 REMOVAL OF FIXTURES

- A. In locations where the Abatement Contractor is directed to dispose of fixtures he shall either decontaminate the fixtures and dispose of them as non-asbestos containing materials or he shall place them in an appropriate container and dispose of them as asbestos containing material.
- B. In locations where the Abatement Contractor is directed to remove and reinstall fixtures, the fixtures shall be removed, decontaminated, labeled, protected with plastic, and stored by the contractor in a location as directed by the Owner.
- C. Upon completion of the asbestos removal and upon receiving satisfactory clearance air monitoring results, all items to be replaced shall be restored to their original location and reinstalled by the Abatement Contractor.

### PART 2 – PRODUCTS

#### 2.01 MATERIALS AND EQUIPMENT

##### A. GENERAL REQUIREMENTS

1. Materials shall be stored off the ground, away from wet or damp surfaces and under protective cover to prevent damage or contamination.
2. Damaged or deteriorating materials shall not be used and shall be removed from the premises.
3. Power tools used to drill, cut into, or otherwise disturb asbestos material shall be equipped with HEPA filtered local exhaust ventilation.
4. The Abatement Contractor shall make available to authorized visitors, ladders and/or


scaffolds of sufficient dimension and quantity so that all work surfaces can be easily and safely reached for inspection. Scaffold joints and ends shall be sealed with tape to prevent incursion of asbestos. Scaffolds and ladders shall comply with all applicable codes.

B. PLASTIC BARRIERS (POLYETHYLENE)

1. In sizes and shapes to minimize the number of joints.
  - a. Six mil. (.006") fire-retardant for vertical protection (walls, entrances, and openings).
  - b. Six mil. (.006") fire-retardant for horizontal protection (fixed equipment) and heating grilles.
  - c. Six mil. (.006") reinforced fire-retardant for floors of decon units.
2. Provide two (2) layers over all roof, wall and ceiling openings. Floor penetrations shall be sealed with a rigid material prior to plasticizing to prevent tripping and fall hazards. All seams within a layer shall be separated by a minimum distance of six feet and sealed airtight. All seams between layers shall be staggered.
3. Barrier Attachment - Commercially available duct tape (fabric or paper) and spray-on adhesive. Duct tape shall be capable of sealing joints of adjacent sheets of plastic, facilitating attachment of plastic sheets to finished or unfinished surfaces of dissimilar materials and adhering under both dry and wet conditions.

C. SIGNS

1. Danger signs shall be provided and shall conform to 29 CFR 1926.1101 and be 14" x 20". These signs shall bear the following information:

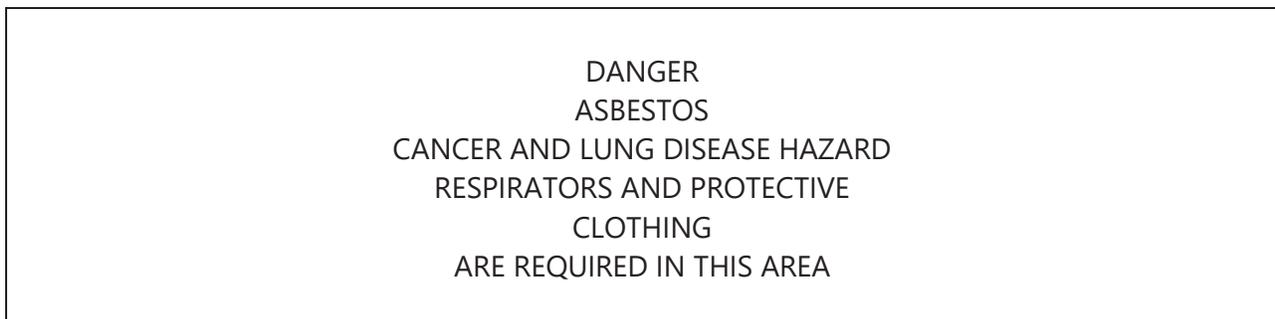

D. DANGER LABELS AND TAPE

1. Labels shall be affixed to any asbestos contaminated material in accordance with the requirements of 29 CFR 1910.1200 (f) of OSHA's Hazard Communication Standard, and

shall contain the following information:

DANGER  
CONTAINS ASBESTOS FIBERS  
AVOID BREATHING DUST  
CANCER AND LUNG DISEASE HAZARD

2. A label shall be affixed on each container of asbestos waste in accordance with the requirements of 49 CFR Parts 171 and 172, Hazardous Substances; Final Rule (U.S. Department of Transportation), and shall contain the following information:

RQ HAZARDOUS SUBSTANCE  
SOLID, NOS, ORM-E, NA 9188  
(ASBESTOS)

3. A label shall be affixed on each container of asbestos waste in accordance with the requirements of 40 CFR Part 61.150, NESHAP; Asbestos; Final Rule (USEPA) and shall contain the name of the waste generator and the location at which the waste was generated.

NOTE: All containers marked as above (1, 2 and 3) shall be disposed of as asbestos waste.

4. Provide 3" red barrier tape printed with black lettered "DANGER ASBESTOS REMOVAL". Locate barrier tape across all corridors, entrances and access routes to asbestos work area.

#### E. PROTECTIVE EQUIPMENT

##### 1. Respiratory Requirements

- a. Where fiber levels permit, and in compliance with regulatory requirements, Powered Air Purifying Respirators are the minimum allowable respiratory protection permitted to be utilized during removal operations.
- b. Where not in violation of NIOSH, OSHA, and any other regulatory requirements, the Abatement Contractor shall provide the following minimum respiratory protection to the maximum use concentrations indicated:

<u>MSHA/NIOSH Approved Respiratory Protection</u>	<u>Maximum Use Concentration</u>
Half-Mask Air Purifying with HEPA Filters	10x PEL
Full-Facepiece Air Purifying HEPA Filters and Quantitative Fit Test	10x PEL
Powered Air Purifying (PAPR), Loose fitting Helmet or Hood, HEPA Filter	25x PEL
Powered Air Purifying (PAPR), Full Facepiece, HEPA Filter	50x PEL
Supplied Air, Continuous Flow Loose fitting Helmet or Hood	25x PEL
Supplied Air, Continuous Flow Full Facepiece, HEPA Filter	50x PEL
Full Facepiece-Supplied Air Pressure Demand, HEPA Filter	100x PEL
Full Facepiece-Supplied Air Pressure Demand, with Aux. SCBA, Pressure Demand or Continuous Flow	> 100x PEL

2. Disposable Clothing - "Tyvek" manufactured by Dupont or approved equal.
3. NIOSH approved safety goggles to protect eyes.
4. Polyethylene bags, 6 mil. (.006") thick (use double bags).

NOTE: Workers must wear disposable coveralls and respirator masks at all times while in the work area. Contaminated coveralls or equipment must be left in work area and not worn into other parts of the building.

#### F. TOOLS AND EQUIPMENT

1. Airless Sprayer - An airless sprayer, suitable for application of encapsulating material, shall be used.

2. Scaffolding - Scaffolding, as required to accomplish the specified work, shall meet all applicable safety regulations.
3. Transportation Equipment - Transportation equipment, as required, shall be suitable for loading, temporary storage, transport and unloading of contaminated waste without exposure to persons or property. Water tight, hard wall containers shall be provided to retain and dispose of any asbestos waste material with sharp-edged components that may tear plastic bags or sheeting. The containers shall be marked with danger labels.
4. Surfactant - Wetting Agents - "Asbestos-Wet" - Aquatrols Corp. of America or approved equal, and shall be non-carcinogenic.
5. Portable (negative air pressure) asbestos filtration system - by Micro-Trap, or approved equal.
6. Vacuum, HEPA type equal to "Nilfisk" #GA73, or "Pullman/Holt" #75 ASA.
7. Amended Water Sprayer - The water sprayer shall be an airless or other low-pressure sprayer for amended water application.
8. Other Tools and Equipment - The Abatement Contractor shall provide other suitable tools for the stripping, removal, encapsulation, and disposal activities including but not limited to: hand-held scrapers, nylon brushes, sponges, rounded edge shovels, brooms, and carts.

### PART 3 – EXECUTION

#### 3.01 PRE-ABATEMENT WORK AREA PREPARATION

- A. The work area shall be vacated by the occupants prior to work area preparation and not reoccupied until satisfactory clearance air monitoring results have been achieved.
- B. Caution signs shall be posted at all locations and approaches to a location where airborne concentrations of asbestos may exceed ambient background levels. Signs shall be posted that permit a person to read the sign and take the necessary protective measures to avoid exposure.
- C. Shut down and lock out electric power to all work areas. The Abatement Contractor shall provide temporary power and lighting and ensure safe installation of temporary power sources and equipment used where high humidity and/or water shall be sprayed in accordance with all applicable codes. All power to work areas shall be brought in from outside the area through a ground-fault interrupter at the source.
- D. Isolate the work area HVAC system.

- E. The personnel decontamination enclosure system shall be installed or constructed prior to preparatory work in the work area and in particular before the disturbance of asbestos material. The waste decontamination enclosure system shall be installed or constructed prior to commencement of abatement activities.
- F. Movable objects within the work area shall be pre-cleaned using HEPA filtered vacuum equipment an/or wet cleaning and such objects shall be removed from the work area to an uncontaminated location. If disposed of as asbestos waste material, cleaning is not required.
- G. Fixed objects and other items, which are to remain within the work area, shall be pre-cleaned using HEPA filtered vacuum equipment and/or wet cleaning. Such objects shall be enclosed with two layers of at least six mil plastic sheeting and sealed with tape.
- H. The work area shall be pre-cleaned using HEPA filtered vacuum equipment and/or wet cleaning. Methods that raise dust, such as dry sweeping or vacuuming with equipment not equipped with HEPA filters, shall be prohibited. Asbestos material shall not be disturbed during pre-cleaning.
- I. Isolation barriers that seal off all openings, including windows, corridors, doorways, ducts, and any other penetrations of the work area, shall be constructed using two layers of at least six mil fire-retardant plastic sheeting sealed with tape. Also, all seams in mechanical system components that pass through the work area shall be sealed. Doorways and corridors, which shall not be used for passage during work, shall also be sealed.
- J. Removal of mounted objects. After isolation barriers are in place, objects such as light fixtures, electrical track, alarm systems, ventilation equipment and other items not previously sealed, shall be double sealed with six mil fire-retardant plastic sheeting. Localized HEPA filtered vacuum equipment shall be used during fixture removal to reduce asbestos dispersal.
- K. Individual roof and floor drains shall be sealed watertight using two layers of 6-mil fire-retardant plastic sheeting and tape prior to plasticizing. Openings in floor shall be fully covered with plywood sheeting secured to the floor in such a way as to minimize a tripping hazard prior to plasticizing.
- L. Emergency and fire exits from the work area shall be maintained or alternate exits shall be established according to all applicable codes.
- M. Adequate toilet facilities shall be supplied by the Abatement Contractor and shall be located either in the clean area of the personnel decontamination enclosure or shall be readily accessible to the personnel decontamination enclosure.

3.02 LARGE ASBESTOS PROJECT PERSONNEL DECONTAMINATION ENCLOSURE SYSTEM  
(ICR 56-7.5)

- A. The personnel decontamination enclosure shall be constructed prior to preparatory work in the work area and in particular before the disturbance of asbestos material.
1. Construction and use of personnel decontamination enclosure systems shall be in accordance with ICR-56 and any Applicable or Site-Specific Variances utilized on this project. Such systems may consist of existing rooms outside of the work area, if the layout is appropriate, that can be enclosed is plastic sheeting and are accessible from the work area. When this situation does not exist, enclosure systems may be constructed out of metal, wood, or plastic support.
  2. The personnel decontamination enclosure system shall consist of a clean room, a shower room, and an equipment room, in series, separated from each other and from the work area by three airlocks.
  3. There shall be one shower per six full shift abatement persons calculated on the basis of the largest shift.
  4. The personnel decontamination enclosure system shall be fully framed, sheathed for safety and constructed to prevent unauthorized entry.
  5. Personnel decontamination enclosure systems constructed at the work site shall utilize at least six mil fire-retardant opaque plastic sheeting. At least two layers of six mil fire-retardant reinforced plastic sheeting shall be used for the flooring of this area.
  6. All prefabricated decontamination units shall be completely decontaminated and sealed prior to separation and removal from the work area. Mobile decontamination units shall remain in place until satisfactory clearance results have been attained.
  7. The clean room shall be sized to accommodate all authorized persons. Benches, lockers, and hooks shall be provided for street clothes. Shelves for storing respirators shall also be provided. Clean clothing, replacement filters for respirators, towels and other necessary items shall be provided. The clean room shall not be used for the storage of tools, equipment, or materials. It shall not be used for office space. A lockable door shall be provided to permit access to the clean room from outside the work area or enclosure. It shall be used to secure the work area and decontamination enclosure during off-shift hours.
  8. The shower room shall contain one or more showers. Each shower head shall be supplied with hot and cold water adjustable at the tap. The shower enclosure shall be constructed to ensure against leakage of any kind. Uncontaminated soap, shampoo and towels shall be available at all times. Shower water shall be drained, collected, and

filtered through a system with at least 5.0-micron particle size collection capability. A system containing a series of several filters with progressively smaller pore sizes shall be used to avoid rapid clogging of the filtration system by large particles. Filtered wastewater shall be discharged in accordance with applicable codes. Contaminated filters shall be disposed of as asbestos waste. The shower room shall be constructed in such way that travel through the decontamination unit shall be through the shower.

9. The equipment room shall be used for the storage of equipment and tools after decontamination using a HEPA filtered vacuum and/or wet cleaning. A one-day supply of replacement filters, in sealed containers, for HEPA vacuums and negative pressure ventilation equipment, extra tools, containers of surfactant and other materials and equipment that may be required during the abatement project may also be stored here. A walk-off pan filled with water shall be located in the work area just outside the equipment room for persons to clean foot covering when leaving the work area. A drum lined with a labeled, at least six mil plastic bag is required for collection of clothing and shall be located in this room. Contaminated footwear and work clothes shall be stored in this area.

### 3.03 WASTE DECONTAMINATION ENCLOSURE SYSTEM (ICR 56-7.5)

#### A. General Requirements

1. A waste decontamination enclosure system shall consist of the following:
  - a. A washroom/cleanup room shall be constructed with an airlock doorway to the work area and another airlock doorway to the holding area.
  - b. The holding area shall be constructed with an airlock doorway to the washroom/cleanup room and another lockable door to the outside.
2. Where there is only one egress from the work area, the holding area of the waste decontamination enclosure system may branch off from the equipment decontamination room, which doubles as a waste washroom, of the personnel decontamination enclosure.
3. The waste washroom shall be equipped with a drain installed to collect water and deliver it to the shower drain where it shall be filtered through a system with at least 5.0-micron particle size collection capability. A system containing a series of several filters with progressively smaller pore sizes shall be used to avoid rapid clogging of the filtration system by large particles. Filtered wastewater shall be discharged in accordance with applicable codes. Contaminated filters shall be disposed of as asbestos waste.
4. The waste washroom shall be constructed in such a way that travel through the rooms shall be through the waste washroom

### 3.04 WORK AREA ENTRY AND EXIT PROCEDURES

- A. The following procedures shall be followed throughout the asbestos abatement project until satisfactory clearance air monitoring results have been achieved:
1. All persons shall enter and exit the work area through the personnel decontamination enclosure system.
  2. All persons who enter the work area or an enclosure shall sign the entry/exit log, located in the clean room, upon every entry and exit.
  3. All persons, before entering the work area, or an enclosure shall read and be familiar with all posted regulations, personal protection requirements, including work area entry and exit procedures, and emergency procedures. The entry/exit log headings shall indicate, and the signatures shall be used to acknowledge, that these have been reviewed and understood by all persons prior to entry.
  4. All persons shall proceed first to the clean room, remove all street clothing, store these items in clean sealable plastic bags or lockers and don coveralls, head covering, foot covering and gloves. All persons shall also don NIOSH approved respiratory protection. Clean respirators and protective clothing shall be utilized, by each person, for each separate entry into the work area. Respirators shall be inspected prior to each use and tested for proper seal using quantitative or qualitative fit checks.
  5. Persons wearing designated personal protective equipment shall proceed from the clean room through the shower room to the equipment room, where necessary tools are collected and any additional clothing shall be donned, before entry into the work area.
  6. Before leaving the work area, all persons shall remove gross contamination from the outside of respirators and protective clothing by brushing, wet cleaning, and/or HEPA vacuuming.
  7. Persons shall proceed to the equipment room where all coveralls, head covering, foot covering, and gloves shall be removed. Disposable clothing shall be deposited into labeled containers for disposal. Reusable contaminated clothing, footwear, head gear and gloves shall be stored in the equipment room when not being used in the work area.
  8. Still wearing respirators, persons shall proceed to the shower area, clean the outside of the respirator and the exposed face area under running water prior to removal of the respirator, and then fully and vigorously shower and shampoo to remove residual asbestos contamination. Respirators shall be washed thoroughly with soap and water. Some types of respirators will require slight modification of these procedures. An airline respirator with HEPA filtered disconnect protection shall be disconnected in the equipment room and worn into the shower. A powered air-purifying respirator facepiece

shall be disconnected from the filter/power pack assembly prior to entering the shower.

9. After showering and drying, all persons shall proceed to the clean room and don clean personal protective equipment if returning to the work area or street clothing if exiting the enclosure.

### 3.05 EQUIPMENT AND WASTE CONTAINER DECONTAMINATION & REMOVAL PROCEDURES

- A. The following procedures shall be followed throughout the asbestos abatement project until satisfactory clearance air monitoring results have been achieved.
  1. External surfaces of contaminated containers and equipment shall be cleaned by wet cleaning and/or HEPA vacuuming in the work area before moving such items into the waste decontamination enclosure system airlock by persons assigned to this duty. These work area persons shall not enter the airlock.
  2. These contaminated items shall be removed from the airlock by persons stationed in the washroom during waste removal operations. These washroom persons shall remove gross contamination from the exterior of their respirators and protective clothing by brushing, HEPA vacuuming and/or wet cleaning.
  3. Once in the waste decontamination enclosure system, external surfaces of contaminated containers and equipment shall be cleaned a second time by wet cleaning.
  4. The cleaned containers of asbestos material and equipment are to be dried of any excessive pooled or beaded liquid, placed in uncontaminated plastic bags or sheeting, and sealed airtight.
  5. The clean re-containerized items shall be moved into the airlock that leads to the holding area. The washroom persons shall not enter this airlock or the work area until waste removal is finished for that period.
  6. Containers and equipment shall be moved from the airlock and into the holding area by persons dressed in clean personal protective equipment, who have entered from uncontaminated areas.
  7. The cleaned containers of asbestos material and equipment shall be placed in water tight carts with doors or tops that shall be closed and secured. These carts shall be held in the holding area pending removal. The carts shall be wet cleaned and/or HEPA vacuumed at least once each day.
  8. The exit from the decontamination enclosure system shall be secured to prevent unauthorized entry.

9. Where the waste removal enclosure is part of the personnel decontamination enclosure, waste removal shall not occur during shift changes or when otherwise occupied. Precautions shall be taken to prevent short circuiting and cycling of air outward through the shower and clean room.
10. Containers labeled with Asbestos hazard warnings shall not be used to dispose of non-asbestos waste.

### 3.06 ENGINEERING CONTROLS

#### A. Ventilation.

1. The Abatement Contractor shall employ HEPA equipped vacuums or negative air pressure equipment for ventilation as required.
2. All negative air pressure equipment ventilation units shall be equipped with HEPA filtration. The Contractor shall provide a manufacturer's test certificate for each unit documenting the capability of trapping and retaining 99.97 percent of asbestos fibers greater than 0.3 microns equivalent aerodynamic diameter.
3. A power supply shall be available to satisfy the requirements of the total of all ventilating units.
4. On electric power failure, abatement shall stop immediately and shall not resume until power is restored and exhaust units are operating fully. On extended power failure, longer than one hour, the decontamination facilities, after the evacuation of all persons from the work area, shall be sealed airtight.
5. If extending the exhaust of the ventilation units 50 feet from the building would result in an exhaust location either in the road, blocking driveway access to the facility or within 50 feet of other buildings, a second unit will be run in series with the primary unit.

### 3.07 MAINTENANCE OF DECONTAMINATION ENCLOSURE SYSTEMS AND WORK AREA BARRIERS

#### A. GENERAL REQUIREMENTS

1. The Consultant must review and approve installation before commencement of work. Upon completion of the construction of all plastic barriers and decontamination system enclosures and prior to beginning actual abatement activities.
2. All plastic barriers inside the work area, in the personnel decontamination enclosure system, in the waste decontamination enclosure system and at partitions constructed to isolate the work area from occupied areas, shall be inspected by the asbestos supervisor

at least twice daily. The barriers shall be inspected before the start of and following the completion of the day's abatement activities. Inspections and observations shall be documented in the project log.

3. Damage and defects in the barriers and/or enclosure systems shall be repaired immediately upon discovery and prior to resumption of abatement activities.
4. At any time during the abatement activities, if visible emissions are observed outside of the work area or if damage occurs to the barriers, work shall be stopped, repairs made, and visible residue immediately cleaned up using HEPA vacuuming methods prior to the resumption of abatement activities.
5. The Abatement Contractor shall HEPA vacuum and/or wet clean the waste decontamination enclosure system and the personnel decontamination enclosure system at the end of each day of abatement activities.

### 3.08 HANDLING AND REMOVAL PROCEDURES

The Abatement Contractor may utilize existing provisions of ICR-56, Applicable Variances or a Site-Specific Variance, approved by the Owner's Consultant, to permit the conduct of this work.

### 3.09 ABATEMENT PROCEDURES

#### A. AIR SAMPLING - By Owner

1. Air sampling and analysis shall be conducted according to the requirements of Subpart 56-4 before the start, during and after the completion of the asbestos removal project.
2. In addition to the requirements of Subpart 56-4, air monitoring shall be conducted in accordance with any approved job specific variance(s) or applicable variance utilized.
3. Clearance samples may be analyzed using PCM to maintain compliance with ICR-56.
4. If applicable, clearance samples will be analyzed using TEM to maintain compliance with ICR-56 and 40 CFR 763.90[i].

B. The provisions of the Applicable Variances or a Job Specific Variance shall apply only in those areas where approval has been granted by the NYS DOL and the Contractor has obtained concurrence from the Owner's Consultant. All other applicable provisions of Industrial Code Rule 56-1 through 56-12 shall be complied.

C. A copy of the NYS DOL Job Specific or Applicable Variance, if applicable, shall be conspicuously posted at the work area(s).

- D. The Abatement Contractor shall construct a decontamination unit at the work site. The Abatement Contractor shall, as a minimum, comply with the requirements of 29 CFR 1926.1101(j); Hygiene facilities and practices for employees.

### 3.10 ENCAPSULATION PROCEDURES

The following procedures shall be followed to seal in non-visible residue, after obtaining satisfactory clearance air monitoring results, while conducting lockdown encapsulation on any surfaces which were the subject of removal or other remediation activities:

- A. Only encapsulants rated as acceptable or marginally acceptable on the basis of Battelle Columbus Laboratory test procedures and rating requirements developed under the 1978 USEPA contract shall be used for lockdown encapsulation.
- B. Sealants considered for use in encapsulation shall first be tested to ensure that the sealant is adequate for its intended use. A section of the work surface shall be evaluated following this initial test application of the sealant to quantitatively determine the sealant's effectiveness in terms of penetrating and locking down the asbestos fibers. The American Society of Testing and Materials (ASTM) Committee E06.21.06E on Encapsulation of Building Materials has developed a guidance document to assist in the selection of an encapsulant.
- C. The encapsulant solvent or vehicle shall not contain a volatile hydrocarbon.
- D. Encapsulants shall be applied using airless spray equipment.
  - 1. Spraying is to occur at the lowest pressure range possible to minimize fiber release from encapsulant impact at the surface. It shall be applied with a consistent horizontal or vertical motion.
- E. Encapsulation shall be utilized as a surface sealant once all asbestos containing materials have been removed in a work area. In no event shall encapsulant be applied to any surface that was the subject of removal or other remediation activities prior to obtaining satisfactory clearance air monitoring.

### 3.11 CLEANUP PROCEDURES

- A. The following cleanup procedures shall be required.
  - 1. Cleanup of accumulations of loose asbestos material shall be performed whenever enough loose asbestos materials have been removed to fill a single leak tight container of the type commensurate with the material properties. In no case shall cleanup be performed less than once prior to the close of each working day. Asbestos material shall

be kept wet until cleaned up.

2. Accumulations of dust shall be cleaned off all surfaces on a daily basis using HEPA vacuum cleaning methods.
  3. Decontamination enclosures shall be HEPA vacuumed at the end of each shift.
  4. Accumulations of asbestos waste material shall be containerized utilizing HEPA vacuums or rubber or plastic dust pans, squeegees, or shovels. Metal shovels shall not be used to pick up or move waste.
  5. Excessive water accumulation or flooding in the area shall require work to stop until the water is collected and disposed of properly.
- B. The following cleanup procedures shall be required after completion of all removal activities.
1. All accumulations of asbestos waste material shall be containerized utilizing HEPA vacuums or rubber or plastic dust pan, squeegees or shovels. Metal shovels shall not be used to pick up or move waste. HEPA vacuums shall be used to clean all surfaces after gross cleanup.
  2. Cleaning. All surfaces in the work area shall be HEPA vacuumed. To pick up excess liquid and wet debris, a wet purpose shop vacuum may be used and shall be decontaminated prior to removal from the work area.
  3. Windows, doors, HVAC system vents and all other openings shall remain sealed. Decontamination enclosure systems shall remain in place and be utilized.
  4. All containerized waste shall be removed from the work area and the holding area.
  5. All tools and equipment shall be decontaminated and removed from the work area.
  6. A final visual inspection and clearance air monitoring, as per the schedule for air sampling and analysis, shall be conducted.
  7. The isolation barriers and decontamination unit shall be removed only after satisfactory clearance air monitoring results have been achieved.

### 3.12 SAFETY MONITORING – CONSULTANT:

The Consultant will designate an Asbestos Safety Technician (AST) to represent the Owner during the removal program. The AST must be on the job site at all times during abatement work. Absolutely no abatement or preparation work will occur without the presence of the AST.

The AST will conduct four (4) milestone inspections.

1. Pre-commencement inspection shall be conducted as follows:
  - a. Notification in writing to the Consultant shall be made by the Abatement Contractor to request a pre-commencement inspection at least 48 hours in advance of the desired date of inspection. This inspection shall be requested prior to beginning preparatory work in another work area.
  - b. The AST shall ensure that:
    - i. The job site is properly prepared and that all containment measures are in place;
    - ii. The designated supervisor shall present to the inspector a valid supervisor's license issued by the New York Department of Labor;
    - iii. All workers shall present to the inspector a valid handler's license issued by the New York Department of Labor;
    - iv. Measures for the disposal of removed asbestos material are in place and shall conform to the adopted standards;
    - v. The Abatement Contractor has a list of emergency telephone numbers at the job site which shall include the monitoring firm employed by the Owner and telephone numbers for fire, police, emergency squad, local hospital, and health officer.
  - c. If all is in order, the AST shall issue a written notice to proceed in the field. If the job site is not in order, then any needed corrective action must be taken before any work is to commence. Conditional approvals shall not be granted.

Progress inspection shall be conducted as follows:

- a. Primary responsibility for ensuring that the abatement work progresses in accordance with these technical specifications and regulatory requirements rests with the Abatement Contractor. The AST shall continuously be present to observe the progress of work and perform required tests.
- b. If the AST observes irregularities at any time, he shall direct such corrective action as may be necessary. If the Abatement Contractor fails to take the corrective action required, or if the Abatement Contractor or any of their employees habitually and/or excessively violate the requirements of any regulation, then the AST shall inform the Owner who shall issue a Stop Work Order to the Abatement Contractor and have the work site secured until all violations are abated.

Clean-up inspections shall be conducted as follows:

- a. Notice for clean-up inspection shall be requested by the Abatement Contractor at least 24 hours in advance of the desired date of inspection;
  - b. The clean-up inspection shall be conducted prior to the removal of any isolation or critical barriers and before final air clearance monitoring;
  - c. The AST shall ensure that:
    - i. The work site has been properly cleaned and is free of visible asbestos containing material and debris.
    - ii. All removed asbestos has been properly placed in a locked secure container outside of the work area.
  - d. If all is in order, the AST shall issue a written notice of authorization to remove surface barriers from the work area. All isolation barriers shall remain in place until satisfactory clearance air sampling has been completed.
4. Clearance Visual Inspection shall be conducted after the removal of non-critical plastic sheeting. The AST shall insure that:
- a. The work area is free of all visible asbestos or suspect asbestos debris and residue.
  - b. All waste has been properly bagged and removed from the work area.
  - c. Should clearance visual inspection identify residual debris, as determined by the AST, the Abatement Contractor is responsible for recleaning the area at his own cost and shall bear all costs of reinspection until acceptable levels are achieved.
- B. The Abatement Contractor shall be required to receive written approval before proceeding after each milestone inspection.

### 3.13 PERSONNEL AIR MONITORING – CONTRACTOR (29 CFR 1926.1101)

- A. Personnel air monitoring shall be provided to determine both short-term (STEL) and full shift during when abatement activities occur. Personnel sampling shall be performed in each work area in order to accurately determine the concentrations of airborne asbestos to which workers may be exposed.
- B. The Abatement Contractor shall have a qualified "Competent Person" (as specified in 29 CFR 1926 OSHA) to conduct personnel air monitoring.

- C. The laboratory performing the air sample analysis shall be certified by NYS DOH ELAP and approved by the consultant.
- D. Personnel air monitoring test results for OSHA Compliance. Results shall be posted at the work site within 24 hours of testing and copies supplied to the Owner within five (5) days of testing. Abnormalities shall be supplied to the Owner immediately.

### 3.14 CLEARANCE AIR MONITORING

- A. Air samples will be collected in and around the work areas at the completion of abatement activities.
- B. Clearance samples may be analyzed using PCM to maintain compliance with ICR-56.
- C. If applicable, clearance samples will be analyzed using TEM to maintain compliance with ICR-56 and 40 CFR part 763 "Asbestos-Containing Materials in Schools; Final Rule and Notice" section 763.90.
- D. \*\*\*RETESTING\*\*\*  
Should clearance air monitoring yield fiber concentrations above the "Clearance" criteria of either 0.01 fibers per CC and/or background levels (PCM) –OR- seventy (70) structures per square millimeter (TEM/AHERA), the Abatement Contractor is responsible for re-cleaning the area at his own cost and shall bear all costs associated with the retesting of the work area(s) including monitoring labor, sampling, analysis, etc. until such levels are achieved.

### 3.15 RESPIRATORY PROTECTION REQUIREMENT

- A. Respiratory protection shall be worn by all individuals inside the work area from the initiation of the asbestos project until all areas have successfully passed clearance air monitoring in accordance with these specifications. The Abatement Contractor shall keep available at all times two PAPR's with new filters and charged batteries for use by authorized visitors.
- B. All respiratory protection shall be MSHA/NIOSH approved in accordance with the provisions of 30 CFR Part II. All respiratory protection shall be provided by the Abatement Contractor, and used by workers in conjunction with the written respiratory protection program.
- C. The Abatement Contractor shall provide respirators that meet the requirements of 29 CFR Parts 1910 and 1926.
  - 1. Full facepiece Type C supplied-air respirators operated in pressure demand mode equipped with an auxiliary self-contained breathing apparatus, operated in pressure

demand or continuous flow, shall be worn during gross removal, demolition, renovation and/or other disturbance of ACM whenever airborne fiber concentrations inside the work area are greater than 10.0 f/cc.

2. Full facepiece Type C supplied-air respirators operated in pressure demand mode with HEPA filter disconnect protection shall be worn during gross removal, demolition, renovation and/or other disturbance of ACM with an amphibole content and/or whenever airborne fiber concentrations inside the work area are equal to or greater than 0.5 f/cc and less than or equal to 10.0 f/cc.
  3. Full facepiece powered air-purifying respirators (PAPR) equipped with HEPA filters shall be worn during the removal, encapsulation, enclosure, repair and/or other disturbance of friable ACM if airborne fiber concentrations inside the work area are less than 0.5 f/cc. A supply of charged replacement batteries, HEPA filters and flow test meter shall be available in the clean room for use with powered air-purifying respirators. HEPA filters shall be changed daily or as flow testing indicates change is necessary. Any Type C supplied-air respirator operated in continuous flow, with HEPA filter disconnect protection, may be substituted for a powered air-purifying respirator.
  4. Loose fitting helmets or hoods with powered air-purifying respirators (PAPR) equipped with HEPA filters may be worn during the removal, encapsulation, enclosure, repair and/or other disturbance of friable ACM if airborne fiber concentrations inside the work area are less than 0.25 f/cc. A supply of charged replacement batteries, HEPA filters and flow test meter shall be available in the clean room for use with powered air-purifying respirators. HEPA filters shall be changed daily or as flow testing indicates change is necessary. Any Type C supplied-air respirator operated in continuous flow may be substituted for a powered air-purifying respirator.
  5. Half-mask or full-face air-purifying respirators with HEPA filters shall be worn only during the preparation of the work area and final clean up procedures provided airborne fiber concentrations inside the work area are less than 0.1 f/cc.
  6. Use of single use dust respirators is prohibited for the above respiratory protection.
- D. Workers shall be provided with personally issued and individually marked respirators. Respirators shall not be marked with any equipment that will alter the fit of the respirator in any way. Only waterproof identification markers shall be used.
- E. The Abatement Contractor shall ensure that the workers are qualitatively or quantitatively fit tested by an Industrial Hygienist initially and every six months thereafter with the type of respirator he/she will be using.
- F. Whenever the respirator design permits, workers shall perform the positive and negative air pressure fit test each time a respirator is worn. Powered air-purifying respirators shall

be tested for adequate flow as specified by the manufacturer.

- G. No facial hair, which interferes with the face-to-mask sealing surface, shall be permitted to be worn when wearing respiratory protection that requires a mask-to-face seal.
- H. Contact lenses shall not be worn in conjunction with respiratory protection.
- I. If a worker wears glasses, a spectacle kit to fit their respirator shall be provided by the Abatement Contractor at the Abatement Contractor's expense.
- J. Respiratory protection maintenance and decontamination procedures shall meet the following requirement:
  - 1. Respiratory protection shall be inspected and decontaminated on a daily basis in accordance with OSHA 29 CFR 1910.134(b); and
  - 2. HEPA filters for negative pressure respirators shall be changed after each shower; and
  - 3. Respiratory protection shall be the last piece of worker protection equipment to be removed. Workers must wear respirators in the shower when going through decontamination procedures; and
  - 4. Airline respirators with HEPA filtered disconnect shall be disconnected in the equipment room and worn into the shower. Powered air-purifying respirator facepieces shall be worn into the shower. Filtered/power pack assemblies shall be decontaminated in accordance with manufacturers' recommendations; and
  - 5. Respirators shall be stored in a dry place and in such a manner that the facepiece and exhalation valves are not distorted; and
  - 6. Organic solvents shall not be used for washing of respirators.
- K. No visitors shall be allowed to enter the contaminated area if they do not have their medical certification and training certificate. Authorized visitors shall be provided with suitable PAPR respirators and instructions on the proper use of respirators whenever entering the work area.

### 3.16 DISPOSAL OF WASTE

#### A. APPLICABLE REGULATIONS

- 1. All asbestos waste shall be stored, transported, and disposed of as per, but not limited to, the following Regulations:

- a. NYS Code Rule 56
  - b. U.S. Department of Transportation (DOT)  
Hazardous Substances  
Title 29, Part 171 and 172 of the code of Federal Regulations  
regarding waste collector registration
  - c. Regulations regarding waste collector registration Title 6, part 364 of the New York State Official Compilation of Codes, Rules and Regulations – 6 NYCRR 364
  - d. USEPA NESHAPS 40 CRF 61
  - e. USEPA ASBESTOS WASTE MANAGEMENT GUIDANCE EPA/530-SW-85-007
- B. TRANSPORTER OR HAULER - The Abatement Contractor shall bear full responsibility for proper characterization, transportation, and disposal of all solid or liquid waste, generated during the project, in a legal manner. The Owner shall approve all transportation and disposal methods.
1. The Abatement Contractor's Transporter (hauler) and disposal site shall be approved by the Owner. The Abatement Contractor shall remove within 48 hours all asbestos waste from the site after completing the clean-up.
  2. The Transporter must possess and present to the Owner's representative a valid New York State Department of Environmental Conservation Part 364 asbestos hauler's permit to verify license plate and permit numbers. The Owner's representative will verify the authenticity of the hauler's permit with the proper authority.
  3. The Abatement Contractor shall give 24-hour notification prior to removing any waste from the site. All waste shall be removed from site only during normal working hours. No waste may be taken from the site without authorization from the Owner's representative.
  4. The Abatement Contractor shall have the Transporter give the date and time of arrival at the disposal site.
  5. The Transporter with the Abatement Contractor and Owner's consultant shall inspect all material in the transport container prior to taking possession and signing the Waste Manifest. The Transporter shall not have any off-site transfers or be combined with any other off-site asbestos material.
  6. The Transporter must travel directly to the disposal site with no unauthorized stops.

C. WASTE STORAGE CONTAINER

1. During loading and on-site storage, the asbestos waste container shall be labeled with EPA Danger signage:

DANGER  
CONTAINS ASBESTOS FIBERS  
AVOID CREATING DUST  
CANCER AND LUNG DISEASE HAZARD

2. The NYS DEC Hauler's Permit number shall be on both sides and back of the container.
3. The Container will not be permitted to leave the site without the proper signage.
4. A copy of the completed waste manifest shall be forwarded directly to the Owner's Consultant by the disposal facility.
5. Packaging of Non-friable Asbestos. Use of an open top container shall require written request, by the Contractor, and written approval by the Owners Representative, and be performed in compliance with all applicable regulations.
  - a) A chute, if used, shall be air/dust tight along its lateral perimeter and at the terminal connection to the dumpster at ground level (solid wall and top container). The upper end of the chute shall be furnished with a hinged lid, to be closed when the chute is not being used.
  - b) The container shall be lined with a minimum of two (2) layers of 6 mil. Fire-retardant polyethylene draped loosely over the sides so as to facilitate being wrapped over the top of the load and sealed prior to transport from the site.
  - c) Prior to transport from the work site the Dumpster will be disconnected from the chute and sealed air/dust tight utilizing six mil plastic and tape. The waste material will be transported as an asbestos containing material by appropriate legal methods.
6. Packaging Friable Asbestos.
  - a) The container shall be a solid wall, hard top and lockable container.
  - b) The container shall be locked upon arrival at the site to restrict access. Security shall be provided at the entrance to the container during the loading process and immediately locked upon completion.

- c) The interior walls, floor and ceiling shall be lined with two (2) layers of 6 mil. Fire-retardant polyethylene.
- d) The waste shall be loaded in such a manner as to protect the integrity of the individual waste packages.
- e) Prior to transport from the work site the interior of the Dumpster will sealed air/dust tight utilizing six mil plastic and tape. The waste material will be transported as an asbestos containing material by appropriate legal methods.

D. WASTE DISPOSAL MANIFEST

1. The Asbestos Waste Manifest shall be equivalent to the "Waste Shipment Record" included in 40 CFR 61. A copy of the Contractor's manifest shall be reviewed by the Owner's Consultant and shall be the only manifest used.
2. The Manifest shall be verified by the Owner's Consultant indicating that all the information and amounts are accurate, and the proper signatures are in place.
3. The Manifest shall have the signatures of the Abatement Contractor and the Transporter prior to any waste being removed from the site.
4. The Manifest shall be signed by the Disposal Facility owner or operator to certify receipt of asbestos containing materials covered by the manifest.
5. A copy of the completed manifest shall be provided by the Abatement Contractor to the Owner's Consultant and remain on site for inspection.
6. Abatement Contractor shall maintain a waste disposal log which indicates load number, date and time left site, container size, type of waste, quantity of waste, name of hauler, NYS DES permit number, trailer and tractor license number, and date manifest was returned to Consultant.
7. The Disposal Facility owner or operator shall return a signed copy of the Waste Manifest directly to:

EAST RAMAPO CSD  
105 SOUTH MADISON AVENUE  
SPRING VALLEY, NEW YORK 10977  
ATTN: ADAM RUBIN
8. Copies of the completed Waste Manifest are to be sent by the disposal facility to the Hauler and Abatement Contractor.
9. Submit signed dump tickets and manifests with final payment request.

10. Final payment request will not be honored without signed dump ticket or manifests accounting for all asbestos waste removed from the site.

#### E. VIOLATIONS OF SPECIFICATIONS

1. Violations of the safety, hygiene, environmental, procedures herein, any applicable federal, state or local requirements or failure to cooperate with the Owner's representative shall be grounds for dismissal and/or termination of this contract.

#### F. VIOLATIONS OF NO SMOKING POLICY

1. The Federal Pro Children Act of 1994 prohibits School District Officials from smoking in any buildings or on the grounds that is property of the School District. The District shall be considered smoke free. The School District strongly enforces its' No Smoking Policy. It is the Contractor's responsibility to inform all workers of this policy. Any worker(s) involved with this project that are found smoking or using tobacco products will be informed that they are in violation of the Federal and State Law and School Board Policy and will be removed from site.

#### 3.17 LOCATION OF WORK – BASE BID

*(Please see attached Drawings for approximate locations)*

Asbestos Abatement Contractor is responsible for providing all demolition activities required to access materials, as well as for providing all labor, equipment, and materials necessary. All ceiling tile grids are to be removed under negative pressure containment.

##### El Dorado Elementary School – Kitchen

- Asbestos Abatement Contractor responsible for complete and total removal and disposal of approximately 120 SF of Friable Asbestos-containing Joint Compound in the "Can Wash" Room.
- Asbestos Abatement Contractor responsible for complete and total removal and disposal of approximately 200 SF of Friable Asbestos-containing Duct Above the Suspended Ceiling, on the Exhaust Duct and 10 SF of Mudded Joint Packing within the mechanical chase.
- Abatement Contractor responsible for total and complete removal and disposal of presumed asbestos-containing roofing materials, as required for rooftop exhaust fan installation. Removals shall include all presumed asbestos-containing materials to existing substrate. Abatement Contractor is responsible for all demolition required to access material(s), as well as for providing all equipment necessary to access material(s).

##### Fleetwood Elementary School – Kitchen

- Asbestos Abatement Contractor responsible for complete and total removal and disposal of approximately 25 SF of Friable Asbestos-containing Mudded Joint Packing Above the Suspended Ceiling within the Kitchen.

- Asbestos Abatement Contractor responsible for complete and total removal and disposal of approximately 200 SF of Friable Asbestos-containing Duct Insulation Above the Suspended Ceiling, on the Hood Vent Duct within the Kitchen.
- Abatement Contractor responsible for total and complete removal and disposal of presumed asbestos-containing roofing materials, as required for rooftop exhaust fan installation. Removals shall include all presumed asbestos-containing materials to existing substrate. Abatement Contractor is responsible for all demolition required to access material(s), as well as for providing all equipment necessary to access material(s).

Chestnut Ridge Middle School – Kitchen

- Asbestos Abatement Contractor responsible for complete and total removal and disposal of approximately 200 SF of Friable Asbestos-containing Duct Insulation Above the Suspended Ceiling, on the Hood Vent Duct within the Kitchen.
- Abatement Contractor responsible for total and complete removal and disposal of presumed asbestos-containing roofing materials, as required for rooftop exhaust fan installation. Removals shall include all presumed asbestos-containing materials to existing substrate. Abatement Contractor is responsible for all demolition required to access material(s), as well as for providing all equipment necessary to access material(s).

Summit Park Elementary School – Kitchen

- Asbestos Abatement Contractor responsible for complete and total removal and disposal of approximately 22 SF of Friable Asbestos-containing Mudded Joint Packing Above the Suspended Ceiling within the Kitchen.
- Abatement Contractor responsible for total and complete removal and disposal of presumed asbestos-containing roofing materials, as required for rooftop exhaust fan installation. Removals shall include all presumed asbestos-containing materials to existing substrate. Abatement Contractor is responsible for all demolition required to access material(s), as well as for providing all equipment necessary to access material(s).

Lime Kiln Elementary School – Kitchen

- Asbestos Abatement Contractor responsible for complete and total removal and disposal of approximately 35 SF of Friable Asbestos-containing Mudded Joint Packing Above the Suspended Ceiling within the Kitchen and the mechanical chase.
- Asbestos Abatement Contractor responsible for complete and total removal and disposal of approximately 400 SF of Friable Asbestos-containing Duct Insulation Above the Suspended Ceiling, on the Exhaust Duct within the Kitchen and in the mechanical chase.
- Abatement Contractor responsible for total and complete removal and disposal of presumed asbestos-containing roofing materials, as required for rooftop exhaust fan installation. Removals shall include all presumed asbestos-containing materials to existing substrate. Abatement Contractor is responsible for all demolition required to access material(s), as well as for providing all equipment necessary to access material(s).

als shall include all presumed asbestos-containing materials to existing substrate. Abatement Contractor is responsible for all demolition required to access material(s), as well as for providing all equipment necessary to access material(s).

Grandview Elementary School - Kitchen

- Asbestos Abatement Contractor responsible for complete and total removal and disposal of approximately 250 SF of Friable Asbestos-containing Duct Insulation Above the Suspended Ceiling, Inside the Duct within the Kitchen.
- Abatement Contractor responsible for total and complete removal and disposal of presumed asbestos-containing roofing materials, as required for rooftop exhaust fan installation. Removals shall include all presumed asbestos-containing materials to existing substrate. Abatement Contractor is responsible for all demolition required to access material(s), as well as for providing all equipment necessary to access material(s).

Pomona Middle School - Kitchen

- Asbestos Abatement Contractor responsible for complete and total removal and disposal of approximately 16 SF of Friable Asbestos-containing Mudded Joint Packing Above the Suspended Ceiling within the Kitchen.
- Asbestos Abatement Contractor responsible for complete and total removal and disposal of approximately 250 SF of Friable Asbestos-containing Duct Insulation Above the Suspended Ceiling, on the Exhaust Hood within the Kitchen.
- Abatement Contractor responsible for total and complete removal and disposal of presumed asbestos-containing roofing materials, as required for rooftop exhaust fan installation. Removals shall include all presumed asbestos-containing materials to existing substrate. Abatement Contractor is responsible for all demolition required to access material(s), as well as for providing all equipment necessary to access material(s).

Hempstead Elementary School – Kitchen

- Asbestos Abatement Contractor responsible for complete and total removal and disposal of approximately 850 SF of Friable Asbestos-containing Pinhole Ceiling Tile within the Kitchen.
- Abatement Contractor responsible for total and complete removal and disposal of presumed asbestos-containing roofing materials, as required for rooftop exhaust fan installation. Removals shall include all presumed asbestos-containing materials to existing substrate. Abatement Contractor is responsible for all demolition required to access material(s), as well as for providing all equipment necessary to access material(s).

Margetts Elementary School – Kitchen

- Abatement Contractor responsible for total and complete removal and disposal of presumed asbestos-containing roofing materials, as required for rooftop exhaust fan installation. Removals shall include all presumed asbestos-containing materials to existing substrate. Abatement

Contractor is responsible for all demolition required to access material(s), as well as for providing all equipment necessary to access material(s).

- Asbestos Abatement Contractor responsible for total and complete removal and disposal of approximately 200 SF of Friable Asbestos-containing Duct Insulation the Exhaust Duct. Abatement Contractor is responsible for all demolition required to access material(s), as well as for providing all equipment necessary to access material(s).

Elmwood Elementary School – Kitchen

- Abatement Contractor responsible for total and complete removal and disposal of presumed asbestos-containing roofing materials, as required for rooftop exhaust fan installation. Removals shall include all presumed asbestos-containing materials to existing substrate. Abatement Contractor is responsible for all demolition required to access material(s), as well as for providing all equipment necessary to access material(s).
- Asbestos Abatement Contractor responsible for complete and total removal and disposal of approximately 200 SF of Friable Asbestos-containing Duct Insulation Above the Suspended Ceiling, on the Exhaust Duct and 10 SF of Mudded Joint Packing within the mechanical chase.

Kakiat Elementary School – Kitchen

- Abatement Contractor responsible for total and complete removal and disposal of presumed asbestos-containing roofing materials, as required for rooftop exhaust fan installation. Removals shall include all presumed asbestos-containing materials to existing substrate. Abatement Contractor is responsible for all demolition required to access material(s), as well as for providing all equipment necessary to access material(s).
- Asbestos Abatement Contractor responsible for total and complete removal and disposal of approximately 200 SF of Friable Asbestos-containing Duct Insulation the Exhaust Duct. Abatement Contractor is responsible for all demolition required to access material(s), as well as for providing all equipment necessary to access material(s).

END OF WORK LOCATIONS

3.18 GENERAL

- A. The Abatement Contractor will be responsible for repairing all building components damaged during abatement including, but not limited to: ceiling tiles, ceiling finishes, wall finishes, floor finishes, etc.
- B. The Abatement Contractor shall be responsible for all demolition required to access materials identified in scope of work and on associated drawings.
- C. Concealed conditions that are exposed and may require additional work shall be brought to the attention of the Owner immediately. The Abatement Contractor shall not abate these

areas without a written notice to proceed. Additional asbestos abatement performed prior to the order to proceed will not be acknowledged.

- D. The Abatement Contractor shall remove asbestos-containing floor covering to the building substrate beneath; in areas indicted. Subsequent to final air clearance the substrate shall be washed with a neutralizing agent to prepare the substrate to accept new floor covering and eliminate residual odors.
- E. Power tools used to drill, cut into, or otherwise disturb asbestos containing material shall be equipped with HEPA filtered local exhaust ventilation.
- F. The Abatement Contractor shall provide access to GFCI electrical power, required to perform the area air monitoring for this project, within and immediately adjacent to each work area.
- G. Unwrapped or unbagged ACM shall be immediately placed in an impermeable waste bag or wrapped in plastic sheeting.
- H. Coordinate all removal operations with the Owner.

.....  
RETURN THIS EXECUTED FORM WITH COMPLETED BID SHEET  
.....

Asbestos Employee Medical Examination Statement  
Certificate of Worker Release  
Asbestos Employee Training Statement  
CERTIFICATE OF WORKERS'S ACKNOWLEDGEMENT

PROJECT NAME: District Wide Kitchen Hood Replacement  
East Ramapo CSD  
105 South Madison Avenue, Spring Valley, NY 10977

ABATEMENT CONTRACTOR'S NAME: \_\_\_\_\_

WORKING WITH ASBESTOS INVOLVES POTENTIAL EXPOSURE TO AIRBORNE ASBESTOS FIBERS. INHALING ASBESTOS FIBERS HAS BEEN LINKED WITH VARIOUS TYPES OF CANCER AND RESPIRATORY DISEASES. SMOKING CIGARETTES AND INHALATION OF ASBESTOS FIBERS INCREASES THE RISK THAT YOU WILL DEVELOP LUNG CANCER ABOVE THAT OF THE NON-SMOKING PUBLIC.

The Contract for this project requires the Abatement Contracting Company to: 1) supply proper respiratory protection devices, and training on their use, to their employees; 2) provide training on safe work practices, and on use of the equipment used on the project, to their employees; and, 3) provide annual medical examinations to their employees meeting the requirements of 29 CFR 1926.1101. The Abatement Contracting Company's signature on this certificate, documents that these contractual obligations are fulfilled, and that you understand the information presented to you.

\*\*\*\*\*DO NOT SIGN THIS FORM UNLESS YOU FULLY UNDERSTAND THIS INFORMATION\*\*\*\*\*

RESPIRATORY PROTECTION: I have been trained in the proper use and limitations of the type of respiratory protection devices to be used on this project. I have reviewed the written respiratory protection program manual and a copy is available for my use. Respiratory protection equipment has been provided, by the Contractor, at no cost to me.

TRAINING COURSE: I have been trained in the risks and dangers associated with handling asbestos, breathing asbestos dust, proper work procedures, personal protection, and engineering controls. I have satisfactorily completed and Asbestos Safety Training Program for New York State and have been issued a New York State Department of Health Certificate of Asbestos Safety Training.

MEDICAL EXAMINATION: I have satisfactorily completed a medical examination within the last 12 months that meets the OSHA requirement for an asbestos worker and included at least 1) medical history 2) pulmonary function 3) medical examination 4) approval to wear respiratory protection devises and may have included an evaluation of a chest x-ray.

Signature: \_\_\_\_\_ Printed Name: \_\_\_\_\_  
Date: \_\_\_\_\_

Witness Signature: \_\_\_\_\_ Printed Name: \_\_\_\_\_  
Date: \_\_\_\_\_



RETURN THIS EXECUTED FORM WITH COMPLETED BID SHEET



ESTIMATE OF ACM QUANTITIES

PROJECT NAME: District Wide Kitchen Hood Replacement  
105 South Madison Ave, Spring Valley, NY 10977




EACH ABATEMENT CONTRACTOR SHALL READ AND ACKNOWLEDGE THE FOLLOWING NOTICE. A SIGNED AND DATED COPY OF THIS ACKNOWLEDGMENT SHALL BE SUBMITTED WITH THE ABATEMENT CONTRACTOR'S BID FOR THIS PROJECT. FAILURE TO DO SO MAY, AT THE SOLE DISCRETION OF THE OWNER, RESULT IN THE BID BEING CONSIDERED NON-RESPONSIVE AND RESULT IN DISQUALIFICATION OF THE ABATEMENT CONTRACTOR'S BID ON THIS PROJECT.



\*\*\* NOTICE \*\*\*

*The linear and square footages listed within this specification are approximates. Abatement Contractor is required to visit the work locations prior to bid submittal in order to take actual field measurements within each listed location. The Abatement Contractor shall base their bid on actual quantities determined, by them, at the site walkthrough. Estimates provided in these specifications are for informational purposes only and shall not be considered a basis for Change Orders on this project.*



Acknowledgment: I have read and understand the above NOTICE regarding removal quantity estimates and understand that estimates provided in these specifications are for informational purposes only and shall not be considered a basis for Change Orders on this project. The Abatement Contractor's signatory represents to the Owner that he/she has the authority of the entity he/she represents to sign this agreement on its behalf.

CS Arch  
209-2102

East Ramapo Central School District  
East Ramapo CSD Kitchen Hood Replacement

Company Name: \_\_\_\_\_  
Type or Print

BY: \_\_\_\_\_  
Signature Title Date

Print Name: \_\_\_\_\_



RETURN THIS EXECUTED FORM WITH COMPLETED BID SHEET



ASSOCIATED ASBESTOS REMOVAL LOCATION DRAWINGS ATTACHED BELOW

- DISTRICT WIDE KITCHEN HOOD REPLACEMENT - ABATEMENT PROJECT


END OF SECTION 028213





Client	EDS
Project No.	13000000000000000000
Issue No.	001
Contract No.	13000000000000000000
Contract No. Extension	00000000000000000000

**QUALITY ENVIRONMENTAL SOLUTIONS & TECHNOLOGIES, INC.**  
1376 NYS ROUTE 9  
WAPPINGERS FALLS, NY 12590  
TEL: (845) 298-6031  
FAX: (845) 298-1325



**ASBESTOS ABATEMENT NOTES**

ASBESTOS ABATEMENT CONTRACTOR IS RESPONSIBLE FOR TOTAL AND COMPLETE REMOVAL AND DISPOSAL OF FRAMBLE ACM CONTAINING INSULATION (MFI) FROM ALL EXISTING CEILING AND ROOF AREAS. ALL FRAMBLE ACM CONTAINING INSULATION (MFI) SHALL BE REMOVED AND DISPOSED OF AS ACM. SUSPENDED LIGHT FIXTURES WILL BE STABILIZED, REPAIRED OR REPLACED WITH NEW LIGHT FIXTURES. ALL FRAMBLE ACM SHALL BE PROTECTED WITH 2 LAYERS OF 5/8" MIN. THICKNESS FIRE RETARDANT PCLY.

ASBESTOS CONTRACTOR IS RESPONSIBLE FOR TOTAL AND COMPLETE REMOVAL AND DISPOSAL OF FRAMBLE ACM CONTAINING INSULATION (MFI) FROM ALL EXISTING CEILING AND ROOF AREAS. ALL FRAMBLE ACM CONTAINING INSULATION (MFI) SHALL BE REMOVED AND DISPOSED OF AS ACM. SUSPENDED LIGHT FIXTURES WILL BE STABILIZED, REPAIRED OR REPLACED WITH NEW LIGHT FIXTURES. ALL FRAMBLE ACM SHALL BE PROTECTED WITH 2 LAYERS OF 5/8" MIN. THICKNESS FIRE RETARDANT PCLY.


ASBESTOS CONTRACTOR IS RESPONSIBLE FOR TOTAL AND COMPLETE REMOVAL AND DISPOSAL OF FRAMBLE ACM CONTAINING INSULATION (MFI) FROM ALL EXISTING CEILING AND ROOF AREAS. ALL FRAMBLE ACM CONTAINING INSULATION (MFI) SHALL BE REMOVED AND DISPOSED OF AS ACM. SUSPENDED LIGHT FIXTURES WILL BE STABILIZED, REPAIRED OR REPLACED WITH NEW LIGHT FIXTURES. ALL FRAMBLE ACM SHALL BE PROTECTED WITH 2 LAYERS OF 5/8" MIN. THICKNESS FIRE RETARDANT PCLY.

ASBESTOS CONTRACTOR IS RESPONSIBLE FOR TOTAL AND COMPLETE REMOVAL AND DISPOSAL OF FRAMBLE ACM CONTAINING INSULATION (MFI) FROM ALL EXISTING CEILING AND ROOF AREAS. ALL FRAMBLE ACM CONTAINING INSULATION (MFI) SHALL BE REMOVED AND DISPOSED OF AS ACM. SUSPENDED LIGHT FIXTURES WILL BE STABILIZED, REPAIRED OR REPLACED WITH NEW LIGHT FIXTURES. ALL FRAMBLE ACM SHALL BE PROTECTED WITH 2 LAYERS OF 5/8" MIN. THICKNESS FIRE RETARDANT PCLY.

ASBESTOS CONTRACTOR IS RESPONSIBLE FOR TOTAL AND COMPLETE REMOVAL AND DISPOSAL OF FRAMBLE ACM CONTAINING INSULATION (MFI) FROM ALL EXISTING CEILING AND ROOF AREAS. ALL FRAMBLE ACM CONTAINING INSULATION (MFI) SHALL BE REMOVED AND DISPOSED OF AS ACM. SUSPENDED LIGHT FIXTURES WILL BE STABILIZED, REPAIRED OR REPLACED WITH NEW LIGHT FIXTURES. ALL FRAMBLE ACM SHALL BE PROTECTED WITH 2 LAYERS OF 5/8" MIN. THICKNESS FIRE RETARDANT PCLY.

**ASBESTOS ABATEMENT LEGEND**

	ACM FRAMBLE INSULATION LOCATED ON METAL DUCT HOOD VENT
	MARKEED JOINT, THERMAL BREAK INSULATION (MFI) FRAMBLE ASBESTOS CONTAINING INSULATION (MFI) LOCATED ON METAL DUCT HOOD VENT. REFER TO SELECTIVE DEMOLITION DRAWING SERIES, RESPECT FOUNDARY UNITS BETWEEN DEMOLITION PILING AREAS AND WORK AND WORK AREAS.
	ACM AND FRAMBLE JOINT COMPOSITION ON CEILING
	FRAMBLE INSULATION LOCATED ON METAL DUCT HOOD VENT AND MAP FITTINGS WITH PPE COVER

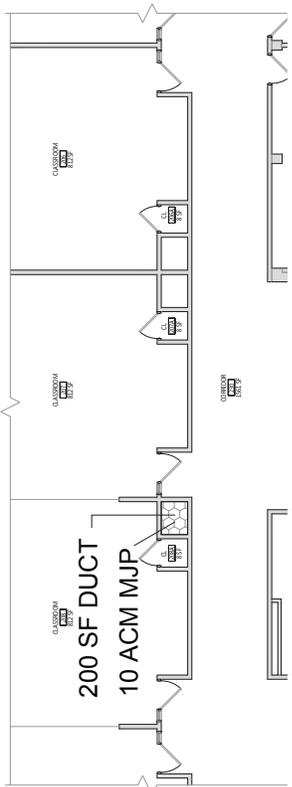

**1 PARTIAL SECOND FLOOR PLAN**  
HAZ102 3/18 - 1/17

EAST RAMAPO CENTRAL SCHOOL DISTRICT  
 DISTRICT WIDE KITCHEN HOOD REPLACEMENT  
 FLEETWOOD ELEMENTARY SCHOOL



Project No.	18-001
Client No.	18-001
Contract No.	18-001
Contract Description	18-001


ENLARGED  
 KITCHEN  
 PLANS

Project No.: **FES HAZ101**  
 CONTRACTOR DOCUMENTS



1376 NYS ROUTE 9  
 WAPPINGERS FALLS, NY 12590  
 TEL : (845) 298-6031  
 FAX : (845) 298-1325

QUALITY ENVIRONMENTAL SOLUTIONS & TECHNOLOGIES, INC.




**ASBESTOS ABATEMENT NOTES**

ASBESTOS ABATEMENT CONTRACTOR IS RESPONSIBLE FOR TOTAL AND COMPLETE REMOVAL AND DISPOSAL OF FRAGILE UNDER CONTAMINATION AND EXISTING CEILING TILES DISPOSED OF AS ACM. SUSPENDED LIGHT FIXTURES WILL BE STABILIZED, WET WIPED, PLASTICIZED AND REMAIN IN PLACE. GRID TO BE REMOVED UNDER CONTAMINATION TO ACCESS ACM. ALL SMOKE AND VAPOR MONITORED (G) DETECTORS WILL BE PROTECTED WITH 2 LAYERS OF 30 MIL THICKNESS FIRE RETARDANT POLY.

ASBESTOS CONTRACTOR IS RESPONSIBLE FOR TOTAL AND COMPLETE REMOVAL AND DISPOSAL OF FRAGILE ACM CONTAINING WIPED, PLASTICIZED AND REMAIN IN PLACE. GRID TO BE REMOVED UNDER CONTAMINATION TO ACCESS ACM. ALL SMOKE AND VAPOR MONITORED (G) DETECTORS WILL BE PROTECTED WITH 2 LAYERS OF 30 MIL THICKNESS FIRE RETARDANT POLY.

EXISTING CEILING TILES DISPOSED OF AS ACM. SUSPENDED LIGHT FIXTURES WILL BE STABILIZED, WET WIPED, VACUUMED, WET WIPED, PLASTICIZED AND REMAIN IN PLACE. GRID TO BE REMOVED UNDER CONTAMINATION TO ACCESS ACM. ALL SMOKE AND VAPOR MONITORED (G) DETECTORS WILL BE PROTECTED WITH 2 LAYERS OF 30 MIL THICKNESS FIRE RETARDANT POLY.

CONTAINING JOINT COMPOUND AND ASSOCIATED SHEETROCK CEILING. LIGHT FIXTURES WILL BE STABILIZED, WET WIPED, VACUUMED, WET WIPED, PLASTICIZED AND REMAIN IN PLACE. GRID TO BE REMOVED UNDER CONTAMINATION TO ACCESS ACM. ALL SMOKE AND VAPOR MONITORED (G) DETECTORS WILL BE PROTECTED WITH 2 LAYERS OF 30 MIL THICKNESS FIRE RETARDANT POLY.

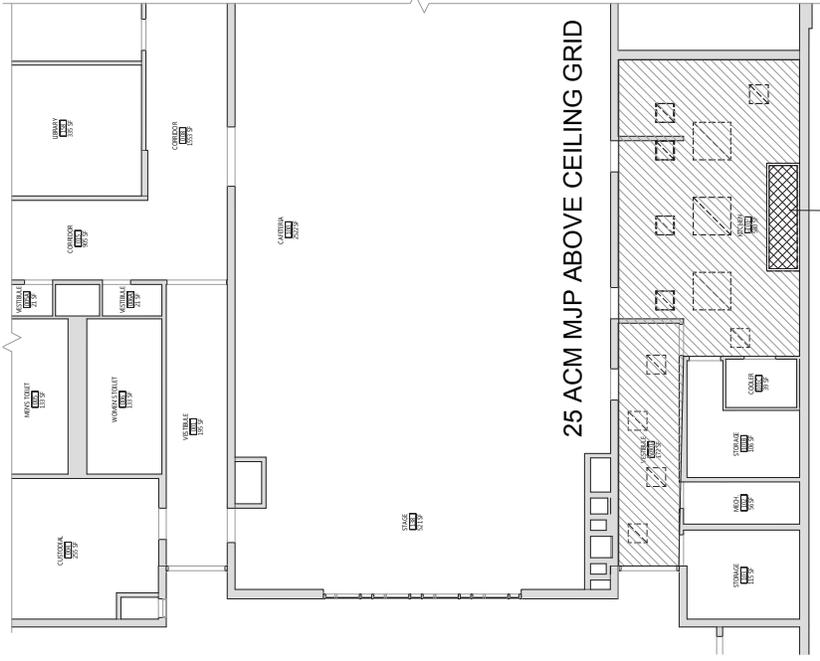

1 KITCHEN - DEMOLITION REFLECTED CEILING PLAN  
 HAZ101 3/18/18 1/2"




Project No.	13-001
Client	East Ramapo Central School District
Contractor	CSARCH
Revision	01
Date	05/15/2013
Drawn By	J. Smith
Checked By	J. Smith
Scale	AS SHOWN

ENLARGED KITCHEN PLANS  
 CRMS  
 HAZ101  
 CONSTRUCTION DOCUMENTS



QUALITY ENVIRONMENTAL SOLUTIONS & TECHNOLOGIES, INC.  
 1376 NYS ROUTE 9  
 WAPPINGERS FALLS, NY 12590  
 TEL: (845) 298-6031  
 FAX: (845) 298-1325




**ASBESTOS ABATEMENT NOTES**

ASBESTOS ABATEMENT CONTRACTOR IS RESPONSIBLE FOR TOTAL AND COMPLETE REMOVAL AND DISPOSAL OF FRAGILE UNDER CONTAMINATION AND EXISTING CEILING TILES DISPOSED OF AS ACM. SUSPENDED LIGHT FIXTURES WILL BE STABILIZED, WIPED, PLASTICIZED AND REMAIN IN PLACE. ALL WORK AREAS SHALL BE PROTECTED WITH 6 MIL THICKNESS FIRE RETARDANT POLY.

ASBESTOS CONTRACTOR IS RESPONSIBLE FOR TOTAL AND COMPLETE REMOVAL AND DISPOSAL OF FRAGILE ACM CONTAINING WIPED, PLASTICIZED AND REMAIN IN PLACE GRID TO BE REMOVED UNDER CONTAMINATION TO ACCESS ACM. ALL SMOKE AND CARBON MONOXIDE (CO) DETECTORS WILL BE PROTECTED WITH 2 LAYERS OF 6 MIL THICKNESS FIRE RETARDANT POLY.

ASBESTOS CONTRACTOR IS RESPONSIBLE FOR TOTAL AND COMPLETE REMOVAL AND DISPOSAL OF FRAGILE ACM CONTAINING WIPED, PLASTICIZED AND REMAIN IN PLACE GRID TO BE REMOVED UNDER CONTAMINATION TO ACCESS ACM. ALL SMOKE AND CARBON MONOXIDE (CO) DETECTORS WILL BE PROTECTED WITH 2 LAYERS OF 6 MIL THICKNESS FIRE RETARDANT POLY.

ASBESTOS CONTRACTOR IS RESPONSIBLE FOR TOTAL AND COMPLETE REMOVAL AND DISPOSAL OF FRAGILE ACM CONTAINING WIPED, PLASTICIZED AND REMAIN IN PLACE GRID TO BE REMOVED UNDER CONTAMINATION TO ACCESS ACM. ALL SMOKE AND CARBON MONOXIDE (CO) DETECTORS WILL BE PROTECTED WITH 2 LAYERS OF 6 MIL THICKNESS FIRE RETARDANT POLY.

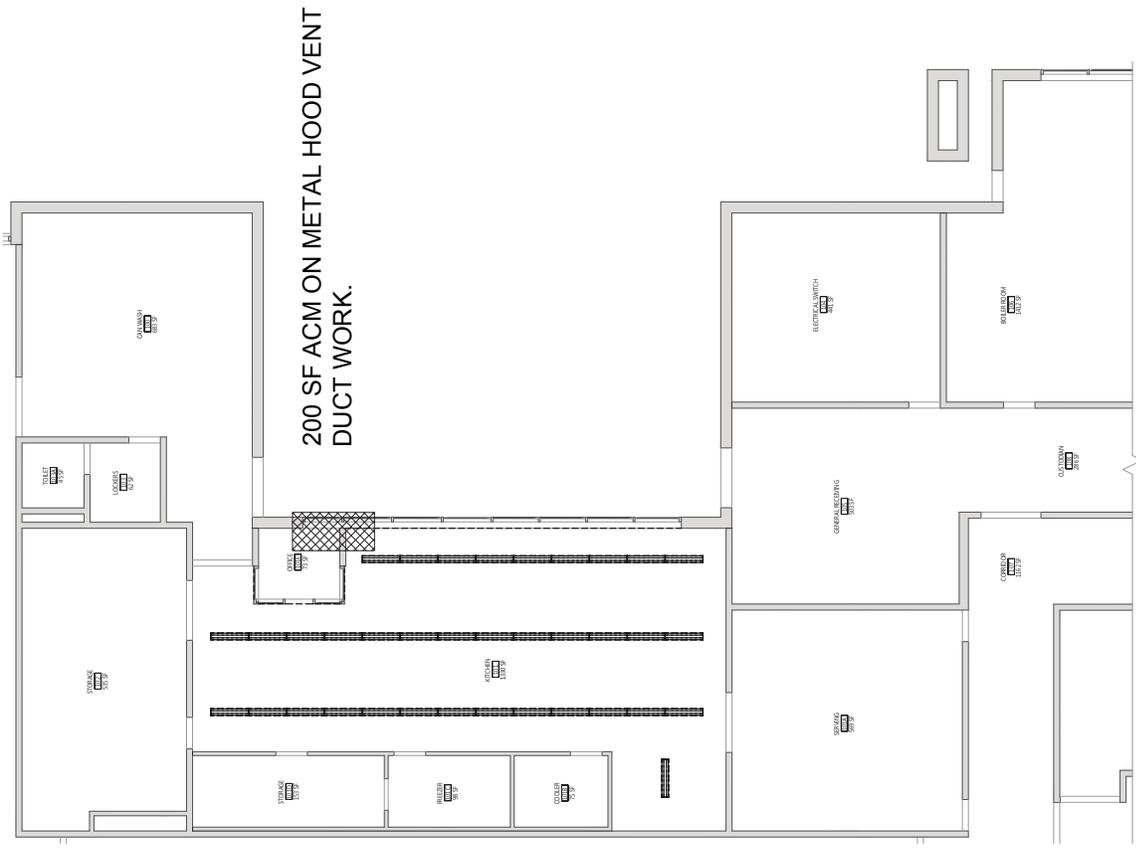

1 KITCHEN - DEMOLITION REFLECTED CEILING PLAN  
 HAZ101-1-102










EAST RAMAPO CENTRAL SCHOOL DISTRICT  
 DISTRICT WIDE KITCHEN HOOD REPLACEMENT  
 POMONA MIDDLE SCHOOL



Contract No.	18-001
Contract Title	DEMOLITION OF EXISTING KITCHEN HOOD AND INSTALLATION OF NEW KITCHEN HOOD
Contractor	ASBESTOS ABATEMENT
Contract Start Date	07/15/2018
Contract End Date	07/15/2018
Contract Budget	11,272,000

Project No. DEMO - ENLARGED KITCHEN & BOILER ROOM PLAN  
 PMS HAZ101  
 CONTRACT DOCUMENT

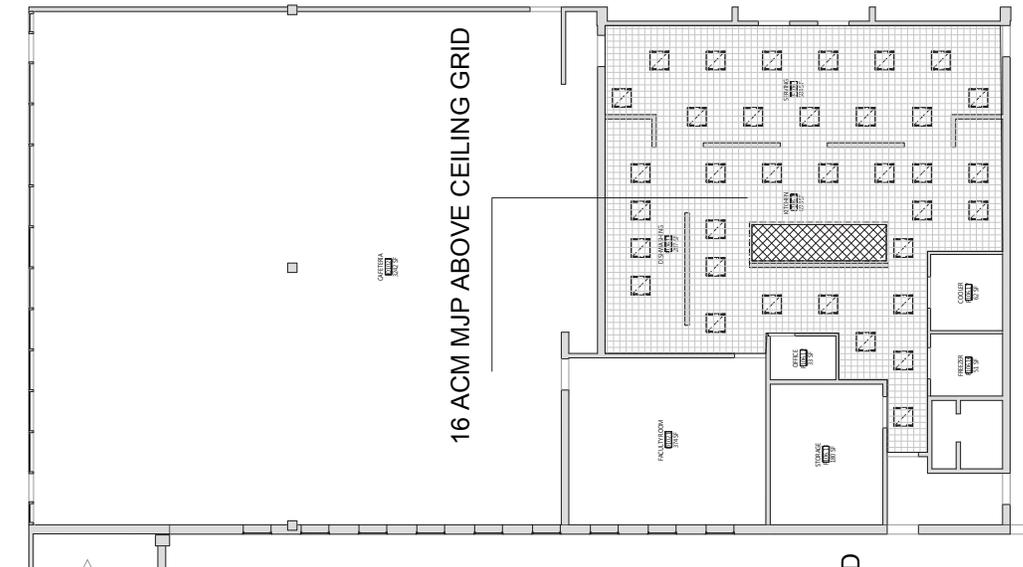

250 SF ACM INSULATION ON EXHAUST VENT HOOD METAL DUCT WORK

1 KITCHEN - DEMOLITION REFLECTED CEILING PLAN  
 HAZ101  
 18-001-100

**ASBESTOS ABATEMENT NOTES**

ASBESTOS ABATEMENT CONTRACTOR IS RESPONSIBLE FOR TOTAL AND COMPLETE REMOVAL AND DISPOSAL OF FRAGILE ASBESTOS CONTAINING MURRED JOINT PIPE INSULATION LOCATED ABOVE CEILING GRIDS. CEILING TILES WILL BE REMOVED UNDER CONTAMINATION CONTROL MEASURES. ALL ASBESTOS CONTAINING MATERIALS WILL BE REMOVED UNDER CONTAMINATION CONTROL MEASURES. HEPA COLLECTOR MUST BE USED AND BEARING INSULATION ABOVE CEILING GRIDS TO BE REMOVED UNDER CONTAMINATION CONTROL MEASURES. ALL SMOKE AND CARBON MONOXIDE (CO) DETECTORS WILL BE PROTECTED WITH 2 LAYERS OF SIX MIL THICKNESS, FIRE RETARDANT POLY.


ASBESTOS ABATEMENT CONTRACTOR IS RESPONSIBLE FOR TOTAL AND COMPLETE REMOVAL AND DISPOSAL OF FRAGILE JOINT CONTAINING EXISTING CEILING TILES LOCATED ABOVE CEILING GRIDS. CEILING TILES WILL BE REMOVED UNDER CONTAMINATION CONTROL MEASURES. HEPA COLLECTOR MUST BE USED AND BEARING INSULATION ABOVE CEILING GRIDS TO BE REMOVED UNDER CONTAMINATION CONTROL MEASURES. ALL SMOKE AND CARBON MONOXIDE (CO) DETECTORS WILL BE PROTECTED WITH 2 LAYERS OF SIX MIL THICKNESS, FIRE RETARDANT POLY.

ASBESTOS CONTRACTOR IS RESPONSIBLE FOR TOTAL AND COMPLETE REMOVAL AND DISPOSAL OF FRAGILE ACM CONTAINING JOINT COMPOUND AND ASSOCIATED SHEET ROCK CEILING. LIGHT FIXTURES WILL BE STABILIZED, HEPA COLLECTOR MUST BE USED AND BEARING INSULATION ABOVE CEILING GRIDS TO BE REMOVED UNDER CONTAMINATION CONTROL MEASURES. ALL SMOKE AND CARBON MONOXIDE (CO) DETECTORS WILL BE PROTECTED WITH 2 LAYERS OF SIX MIL THICKNESS, FIRE RETARDANT POLY.

**ASBESTOS ABATEMENT LEGEND**

- ACM FRAGILE INSULATION LOCATED ON METAL DUCT HOOD VENT
- HAZARDOUS JOINT - THERMAL PIPE INSULATION AND FRAGILE ASBESTOS CONTAINING UNDER CONTAMINATION TO ADDRESS ANY FUGITIVES ON TILE IS PIPE TO BE INSULATED
- ACM AND FRAGILE JOINT COMPOUND ON CEILING

REFER TO SELECTIVE DEMOLITION DRAWING SERIES IN RESPECT BOUNDARY LINES BETWEEN DEMOLITION PHASES, AREA WORK AND FOR WORK PHASES.



QUALITY ENVIRONMENTAL SOLUTIONS & TECHNOLOGIES, INC.  
 1376 NYS ROUTE 9  
 WAPPINGERS FALLS, NY 12590  
 TEL : (845) 298-6031  
 FAX : (845) 298-1325



CONTRACT - ALL RIGHTS RESERVED










Project No.	13-0000000000
Client	East Ramapo Central School District
Contract No.	13-0000000000
Contract Name	East Ramapo Central School District - District Wide Kitchen Hood Replacement - Elmwood Elementary School
Contract Dates	03/22/2013

Sheet Title  
PARTIAL SECOND FLOOR AND ROOF PLANS  
EMES  
HAZ102  
CONSTRUCTION DOCUMENTS

QUALITY ENVIRONMENTAL SOLUTIONS & TECHNOLOGIES, INC.  
1376 NYS ROUTE 9  
WAPPINGERS FALLS, NY 12590  
TEL: (845) 298-6031  
FAX: (845) 298-1325



**ASBESTOS ABATEMENT NOTES**

ASBESTOS ABATEMENT CONTRACTOR IS RESPONSIBLE FOR TOTAL AND COMPLETE REMOVAL AND DISPOSAL OF FRIBLE ACM CONTAINING INSULATION AND FRIBLE ACM INSULATION UNDER CONTAMINATION AND EXISTING CEILING TILE DISPOSED OF AS ACM. SUSPENDED LIGHT FIXTURES WILL BE STABILIZED, REPAIRED OR REMOVED UNDER CONTAMINATION. ALL FRIBLE ACM, SUSPENDED LIGHT FIXTURES, AND FRIBLE ACM INSULATION WILL BE PROTECTED WITH GLASSING OF SIMILAR THICKNESS FIRE RETARDANT POLY.

ASBESTOS CONTRACTOR IS RESPONSIBLE FOR TOTAL AND COMPLETE REMOVAL AND DISPOSAL OF FRIBLE ACM CONTAINING INSULATION AND FRIBLE ACM INSULATION UNDER CONTAMINATION AND EXISTING CEILING TILE DISPOSED OF AS ACM. SUSPENDED LIGHT FIXTURES WILL BE STABILIZED, REPAIRED OR REMOVED UNDER CONTAMINATION. ALL FRIBLE ACM, SUSPENDED LIGHT FIXTURES, AND FRIBLE ACM INSULATION WILL BE PROTECTED WITH GLASSING OF SIMILAR THICKNESS FIRE RETARDANT POLY.

ASBESTOS CONTRACTOR IS RESPONSIBLE FOR TOTAL AND COMPLETE REMOVAL AND DISPOSAL OF FRIBLE ACM CONTAINING INSULATION AND FRIBLE ACM INSULATION UNDER CONTAMINATION AND EXISTING CEILING TILE DISPOSED OF AS ACM. SUSPENDED LIGHT FIXTURES WILL BE STABILIZED, REPAIRED OR REMOVED UNDER CONTAMINATION. ALL FRIBLE ACM, SUSPENDED LIGHT FIXTURES, AND FRIBLE ACM INSULATION WILL BE PROTECTED WITH GLASSING OF SIMILAR THICKNESS FIRE RETARDANT POLY.

ASBESTOS CONTRACTOR IS RESPONSIBLE FOR TOTAL AND COMPLETE REMOVAL AND DISPOSAL OF FRIBLE ACM CONTAINING INSULATION AND FRIBLE ACM INSULATION UNDER CONTAMINATION AND EXISTING CEILING TILE DISPOSED OF AS ACM. SUSPENDED LIGHT FIXTURES WILL BE STABILIZED, REPAIRED OR REMOVED UNDER CONTAMINATION. ALL FRIBLE ACM, SUSPENDED LIGHT FIXTURES, AND FRIBLE ACM INSULATION WILL BE PROTECTED WITH GLASSING OF SIMILAR THICKNESS FIRE RETARDANT POLY.


ASBESTOS CONTRACTOR IS RESPONSIBLE FOR TOTAL AND COMPLETE REMOVAL AND DISPOSAL OF FRIBLE ACM CONTAINING INSULATION AND FRIBLE ACM INSULATION UNDER CONTAMINATION AND EXISTING CEILING TILE DISPOSED OF AS ACM. SUSPENDED LIGHT FIXTURES WILL BE STABILIZED, REPAIRED OR REMOVED UNDER CONTAMINATION. ALL FRIBLE ACM, SUSPENDED LIGHT FIXTURES, AND FRIBLE ACM INSULATION WILL BE PROTECTED WITH GLASSING OF SIMILAR THICKNESS FIRE RETARDANT POLY.

ASBESTOS CONTRACTOR IS RESPONSIBLE FOR TOTAL AND COMPLETE REMOVAL AND DISPOSAL OF FRIBLE ACM CONTAINING INSULATION AND FRIBLE ACM INSULATION UNDER CONTAMINATION AND EXISTING CEILING TILE DISPOSED OF AS ACM. SUSPENDED LIGHT FIXTURES WILL BE STABILIZED, REPAIRED OR REMOVED UNDER CONTAMINATION. ALL FRIBLE ACM, SUSPENDED LIGHT FIXTURES, AND FRIBLE ACM INSULATION WILL BE PROTECTED WITH GLASSING OF SIMILAR THICKNESS FIRE RETARDANT POLY.

**ASBESTOS ABATEMENT LEGEND**

	ACM FRIBLE INSULATION LOCATED ON METAL DUCT HOOD VENT
	MERGED JOINT, THERMAL PINE INSULATION (MFP) FRIBLE ASBESTOS CONTAINING UNDER CONTAMINATION TO ADDRESS MFP AND DISPOSED ON TILES TO BE REMOVED
	ACM AND FRIBLE JOINT COMPOSITION ON CEILING
	FRIBLE INSULATION LOCATED ON METAL DUCT HOOD VENT AND MFP FITTINGS WITHIN PIPE CHASE

REFER TO SELECTIVE DEMOLITION DRAWING SERIES, RESPECT BOUNDARY LINES BETWEEN DEMOLITION WORK AREAS AND WORK AND NON WORK AREAS.

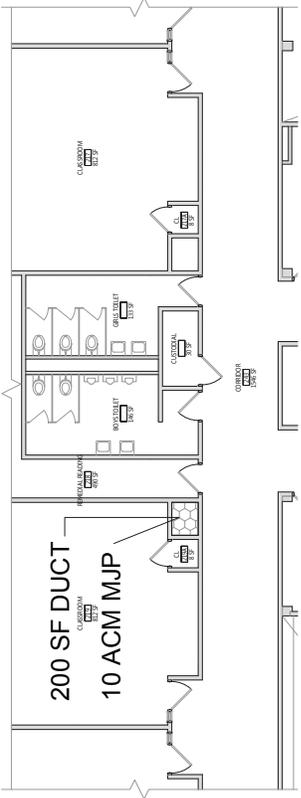

1 PARTIAL SECOND FLOOR PLAN  
HAZ102



THIS PAGE INTENTIONALLY LEFT BLANK