




- NOTES
1. REPLACE EXISTING SMITH CAST IRON BOILER.
 2. REPLACE (2) BALDOR INDUSTRIAL AND BELL & GOSSET 3HP FRAME PUMPS.
 3. INSTALL HEAT MANAGEMENT SYSTEM TO CONTROL HEATING USE.
 4. DISCONNECT BOILER ELECTRICAL FEED AND CONNECT NEW TO SAME CIRCUITRY.
 5. DISCONNECT BOILER FUEL SOURCE, ALTER PIPING AS REQUIRED TO CONNECT TO NEW BOILER.
 6. CONTRACTOR TO QUANTIFY APPROXIMATELY 50FT OF NEW HOT WATER PIPING OF THE FOLLOWING SIZES: 4" (SUPPLY & RETURN), AND 6" (SUPPLY & RETURN) FOR THE REPLACEMENT OF BOILER AND PUMPS.

- KEY NOTES
1. EXISTING 2-1/2" BALL VALVE AND VERTICAL HW PIPING SHALL BE REMOVED.
 2. DISCONNECT BOILER FLUE FROM MAIN DUCT.
 3. BELL & GOSSET CIRCULATOR PUMP TO REMAIN.
 4. REMOVE EXISTING HW PIPING.

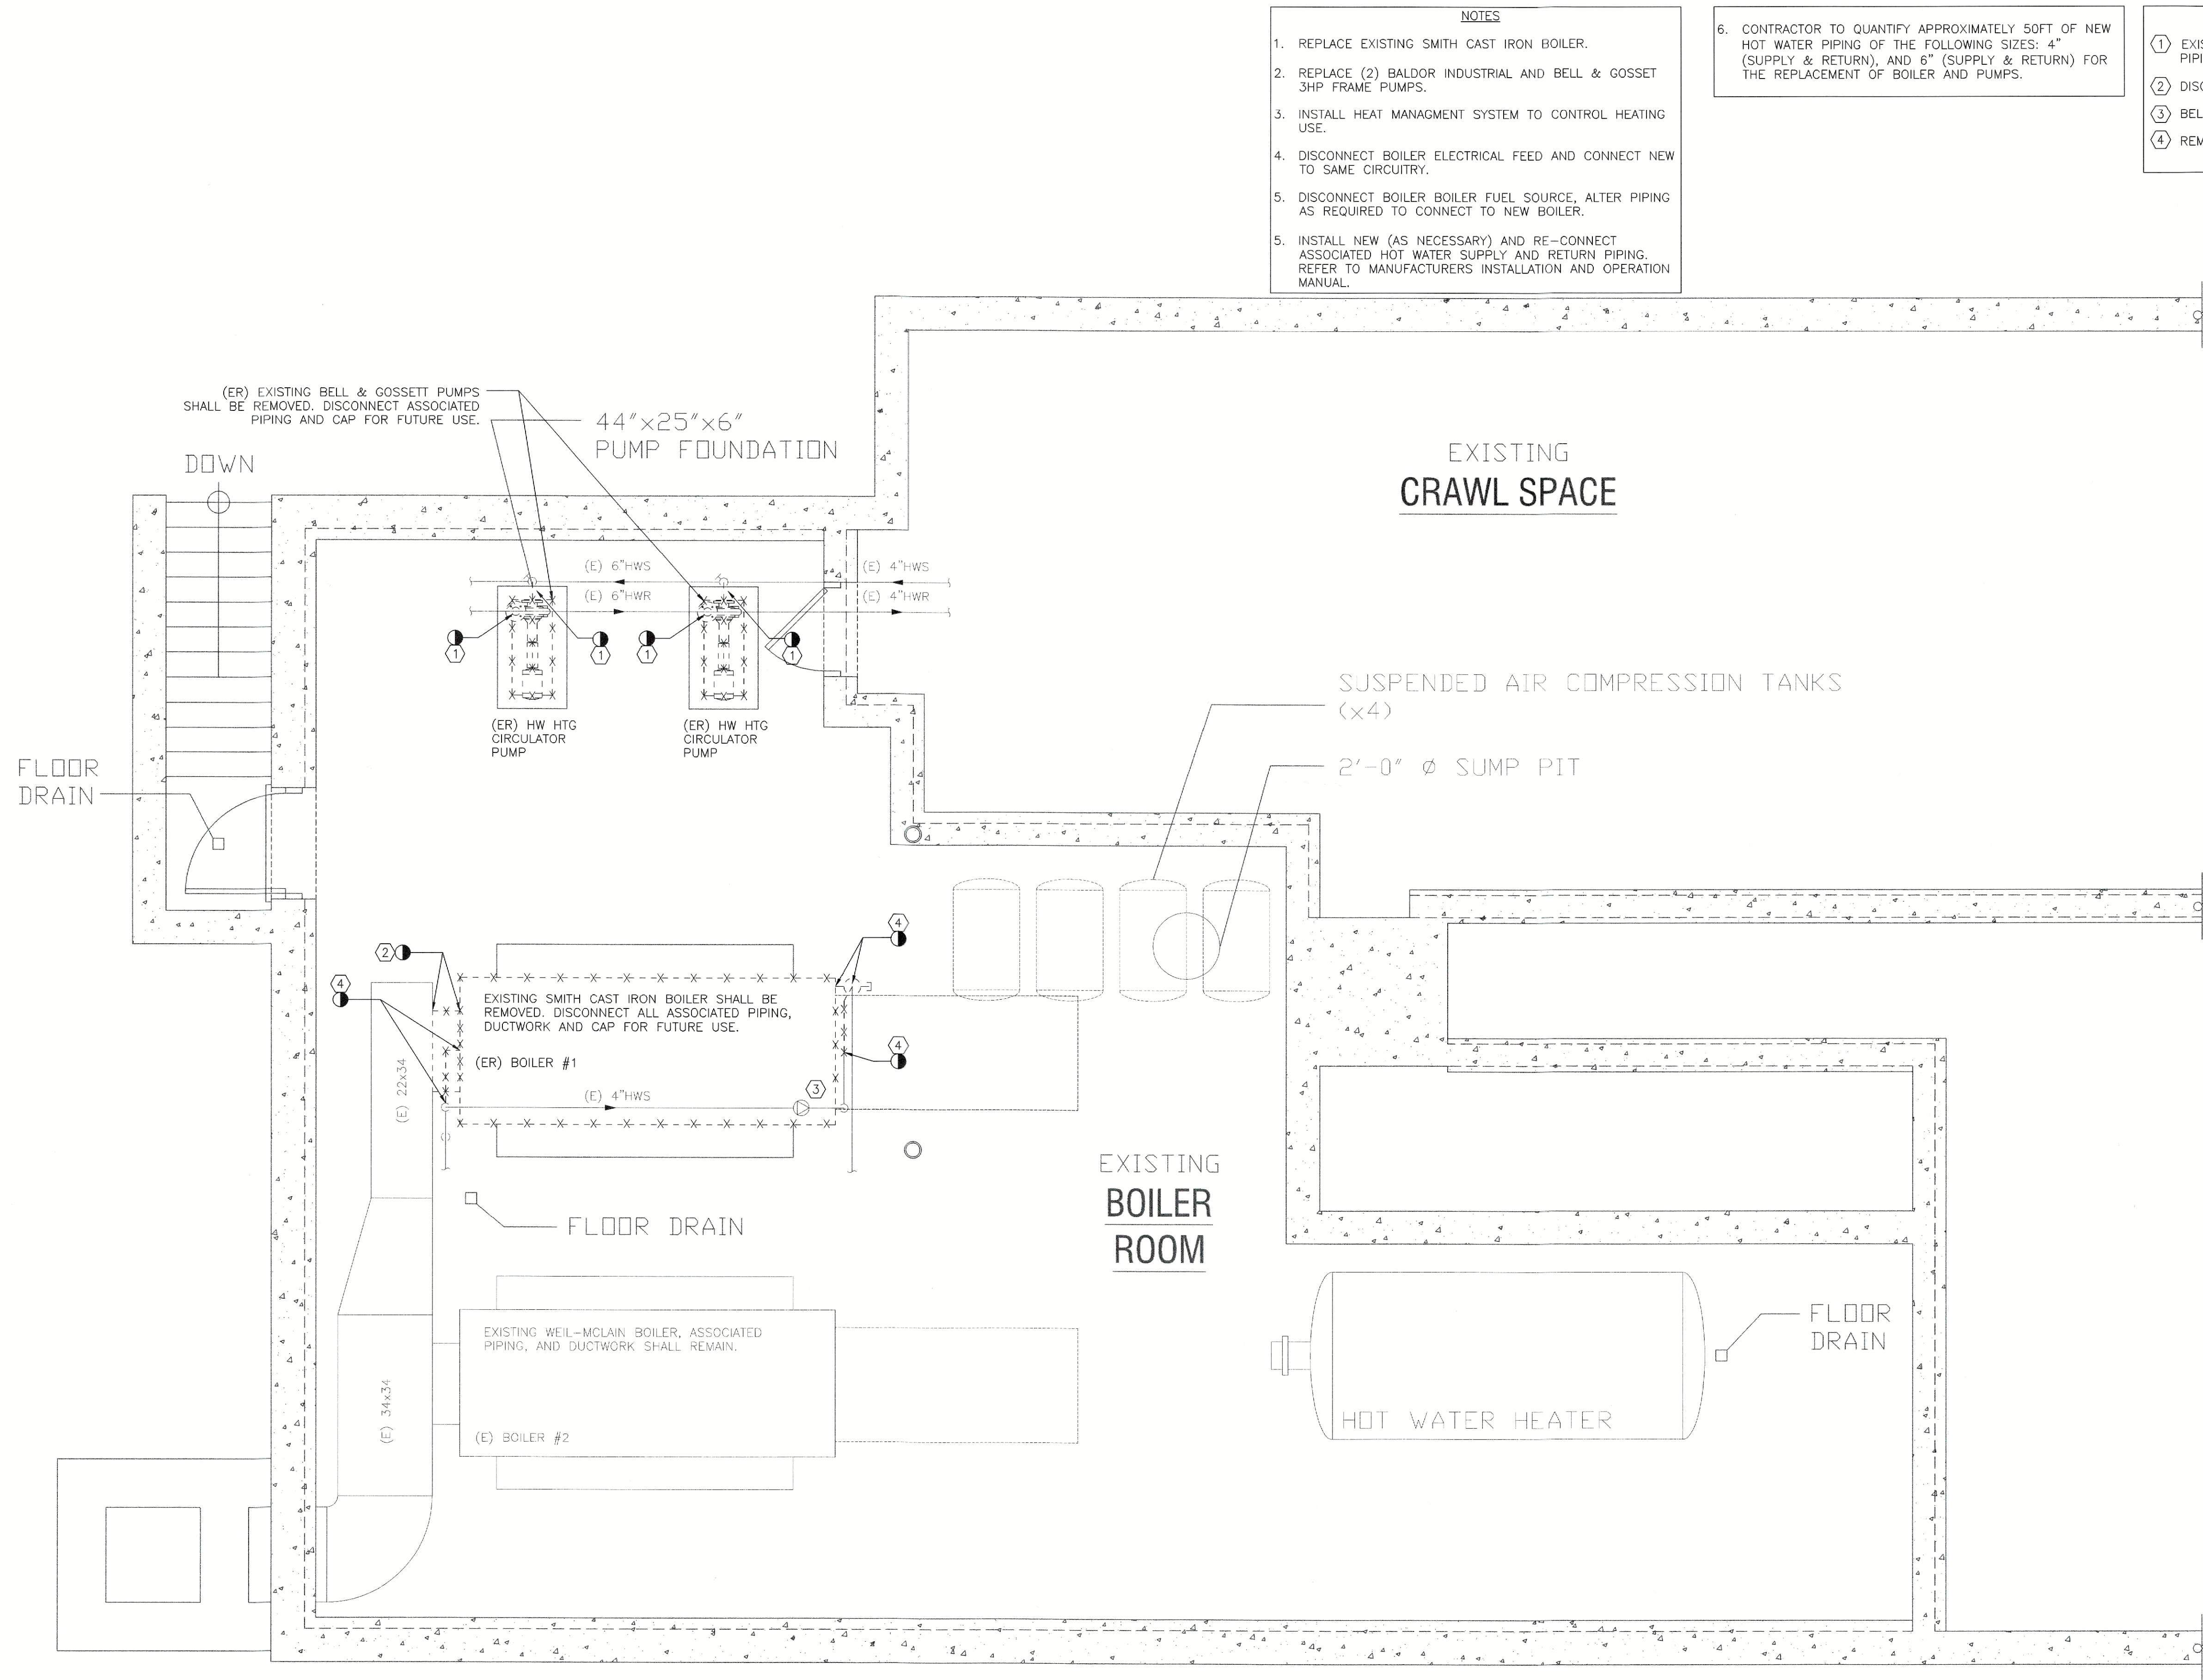

THIS DRAWING IS THE PROPERTY OF THE ENGINEER. IT HAS BEEN SPECIFICALLY PREPARED FOR THE OWNER FOR THIS PROJECT AT THIS SITE AND IS NOT TO BE USED FOR ANY OTHER PURPOSE, LOCATION OR OWNER WITHOUT WRITTEN CONSENT OF THE ENGINEER.

Atlantic Consulting & Engineering LLC
525 John Street
Bridgeport, Connecticut 06604-3929
(203) 336-4422
(203) 336-1769 FAX
e-mail: info@atlantic-eng.com

PORT CHESTER HOUSING
AUTHORITY - BOILER
REPLACEMENT
9 WEBER DRIVE, PORT CHESTER,
NY 10573

Job Number:
—

Job Start Date:
6/13/22

Issue:	Date:
REVIEW	6/16/22
PERMIT	7/15/22
ISSUED FOR BID	9/1/22

Drawn By: Checked By:
D.M.D. J.E.Q.

Sheet Title:
WEBER DRIVE
BOILER ROOM
DEMOLITION PLAN

Scale:
3/8" = 1'-0"

Sheet Number:
MD-100