

**888 resorts World Dr
Monticello, NY 12701**

**888 resorts World Dr
Monticello, NY 12701**

120 HUYSHOPE AVENUE
SUITE 400
HARTFORD, CT 06106
860.247.9226

© 2021 JCJ Architecture


CONSULTANT:

R.G. Vanderwell Engineers, LLP	617.423.7423 TEL
274 Summer Street	617.423.7401 FAX
Boston, MA 02210	vanderwell.com

ISSUE	07/06/2022
JOB	30860.00
DRAWN	Author
SCALE	1/8" = 1'-0"
REVISIONS	

DEMO DUCTWORK THIRD FLOOR

M-3

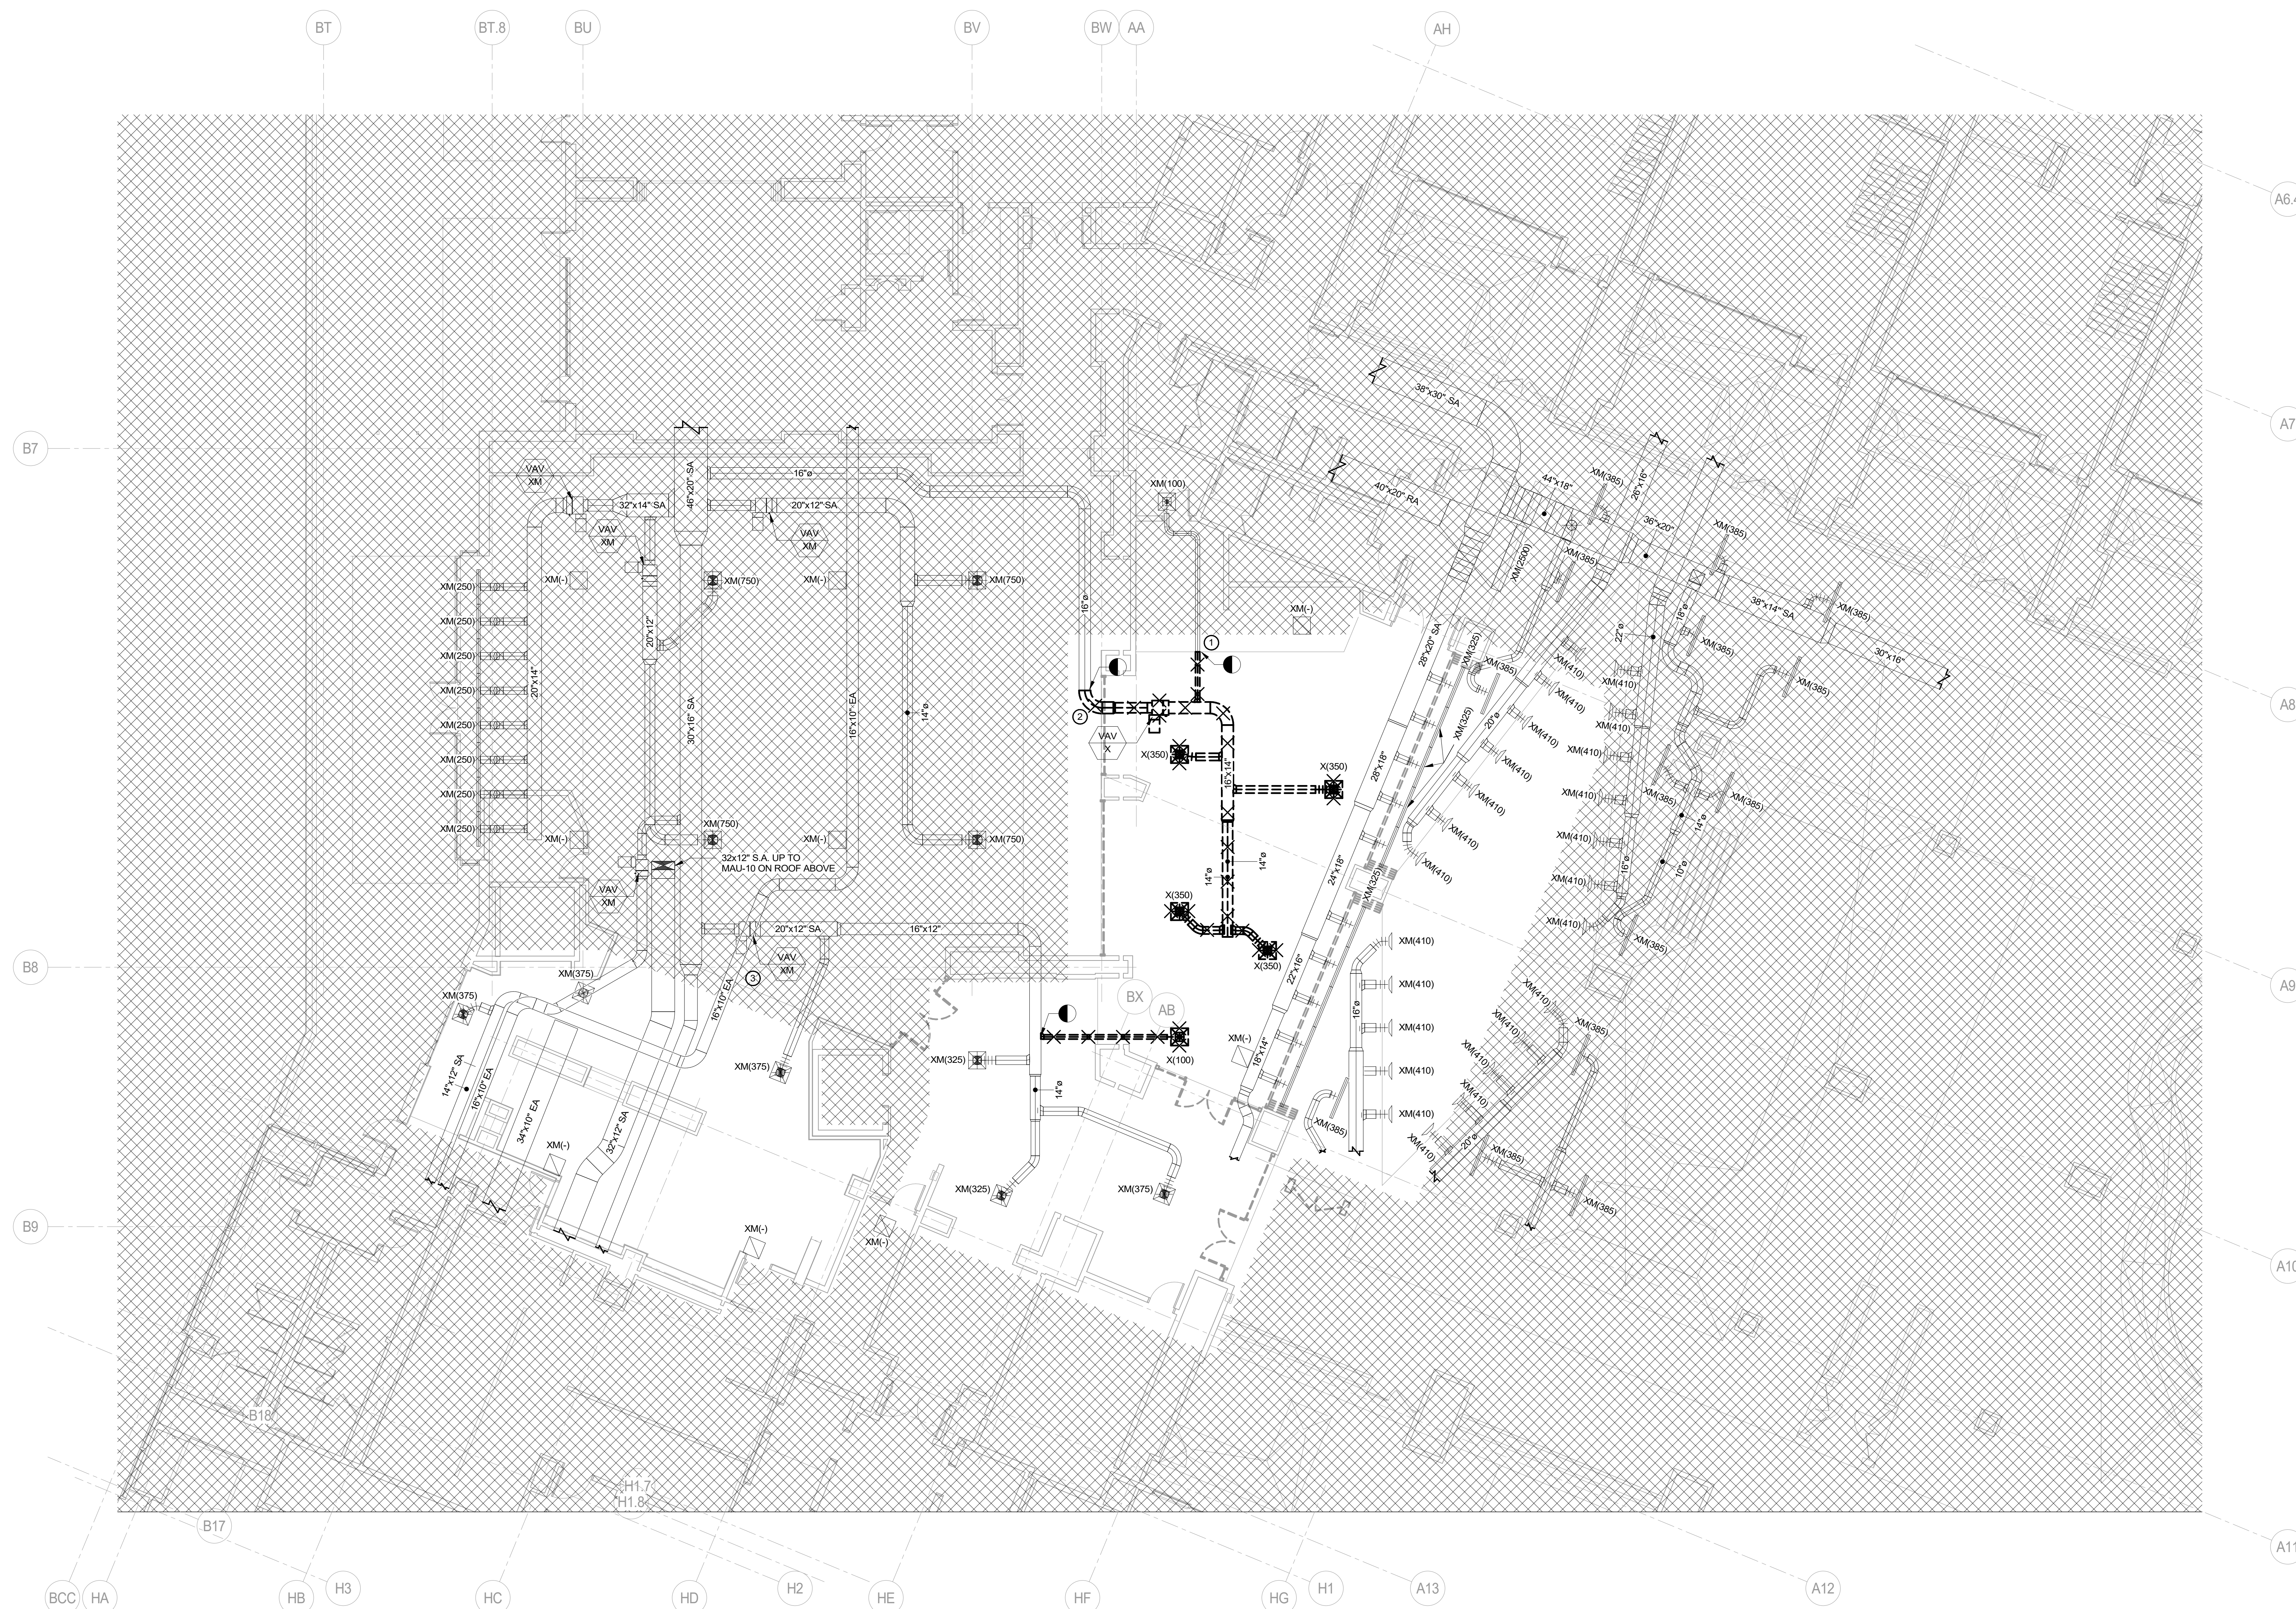

① HVAC - DEMO THIRD FLOOR
1/8" = 1'-0"

GENERAL DEMO NOTES:

1. THIS PROJECT INVOLVES CONSTRUCTION INSIDE AN EXISTING STRUCTURE. INFORMATION CONTAINED ON THIS DRAWING WAS OBTAINED FROM THE BEST AVAILABLE INFORMATION AND IS NOT INTENDED TO LIMIT THE SCOPE OF WORK.

2. CONTRACTOR SHALL VISIT THE SITE PRIOR TO SUBMITTAL OF BID TO DETERMINE CONDITIONS AFFECTING THE EXECUTION OF THE WORK. AFTER VISITING THE SITE, REQUEST SUCH FURTHER INFORMATION AND/OR CLARIFICATION AS NECESSARY TO UNDERSTAND THE WORK REQUIRED AND TO PROPERLY ESTIMATE THE COST. CONTRACTORS, BY SUBMITTING A BID, ARE DEEMED TO BE COMPLETELY FAMILIAR WITH THE EXISTING CONDITION OF THE BUILDING AS IT INFLUENCES WORK DESCRIBED.

3. REMOVE AND LEGALLY DISPOSE OF ITEMS ASSOCIATED WITH THIS PROJECT AREA, UNLESS OTHERWISE NOTED. CONSTRUCTION MANAGER SHALL CLARIFY WITH OWNER ALL ITEMS THAT SHALL REMAIN THE PROPERTY OF THE OWNER PRIOR TO DISPOSAL. ITEMS TO BE SALVAGED MAY BE REMOVED FROM THE SITE AS WORK PROGRESSES. SALVAGED ITEMS MUST BE TRANSPORTED FROM THE SITE AS THEY ARE REMOVED.

4. DUCTWORK, INSULATION, OR EQUIPMENT TO REMAIN IS DAMAGED IN APPEARANCE OR IS UNSERVICEABLE, REMOVE DAMAGED OR UNSERVICEABLE PORTIONS AND REPLACE WITH NEW PRODUCTS OF EQUAL SIZE, CAPACITY, AND QUALITY.

5. DISCONNECT, DEMOLISH, AND REMOVE MECHANICAL SYSTEMS, EQUIPMENT, AND COMPONENTS INDICATED TO BE REMOVED.

A. DUCTS TO BE REMOVED: REMOVE PORTION OF DUCTS INDICATED TO BE REMOVED AND CAP REMAINING DUCTS WITH SAME OR COMPATIBLE DUCTWORK MATERIAL AS REQUIRED. REFER TO ARCHITECT'S PLAN/SPEC FOR WALL PATCHING.

B. EQUIPMENT TO BE REMOVED: DISCONNECT AND CAP SERVICES AND REMOVE EQUIPMENT. EQUIPMENT SHALL BE REMOVED FROM THE PREMISES AND LEGALLY DISPOSED OF.

C. COMPONENTS TO BE REMOVED: DISCONNECT AND CAP SERVICES AND REMOVE EQUIPMENT. CLEAN AND STORE EQUIPMENT/DEVICES WHEN APPROPRIATE. REINSTALL, RECONNECT, AND MAKE EQUIPMENT/DEVICES OPERATIONAL.

D. EQUIPMENT TO BE REMOVED AND SALVAGED: DISCONNECT AND CAP SERVICES AND REMOVE EQUIPMENT AND DELIVER TO OWNER. COORDINATE WITH OWNER PRIOR TO DEMOLITION WORK COMMENCES REGARDING ANY ITEMS TO BE TURNED OVER TO THE OWNER.

DEMO KEY NOTES:

1. CONTRACTOR SHALL LIMIT DEMO TO EXTENT OF CEILING DEMO. BRANCH DUCT AND DIFFUSER SHALL REMAIN FOR FUTURE USE.

2. ABANDON DUCT IN PLACE. CONFIRM EXTENT OF CEILING DEMO WITH ARCHITECTURAL RCP.

3. REBALANCE TO AIRFLOW INDICIATED ON PLANS.