


C:\Users\dmliller\Documents\197-2201 - HES Phase1_ARCH_dmliller03.rvt

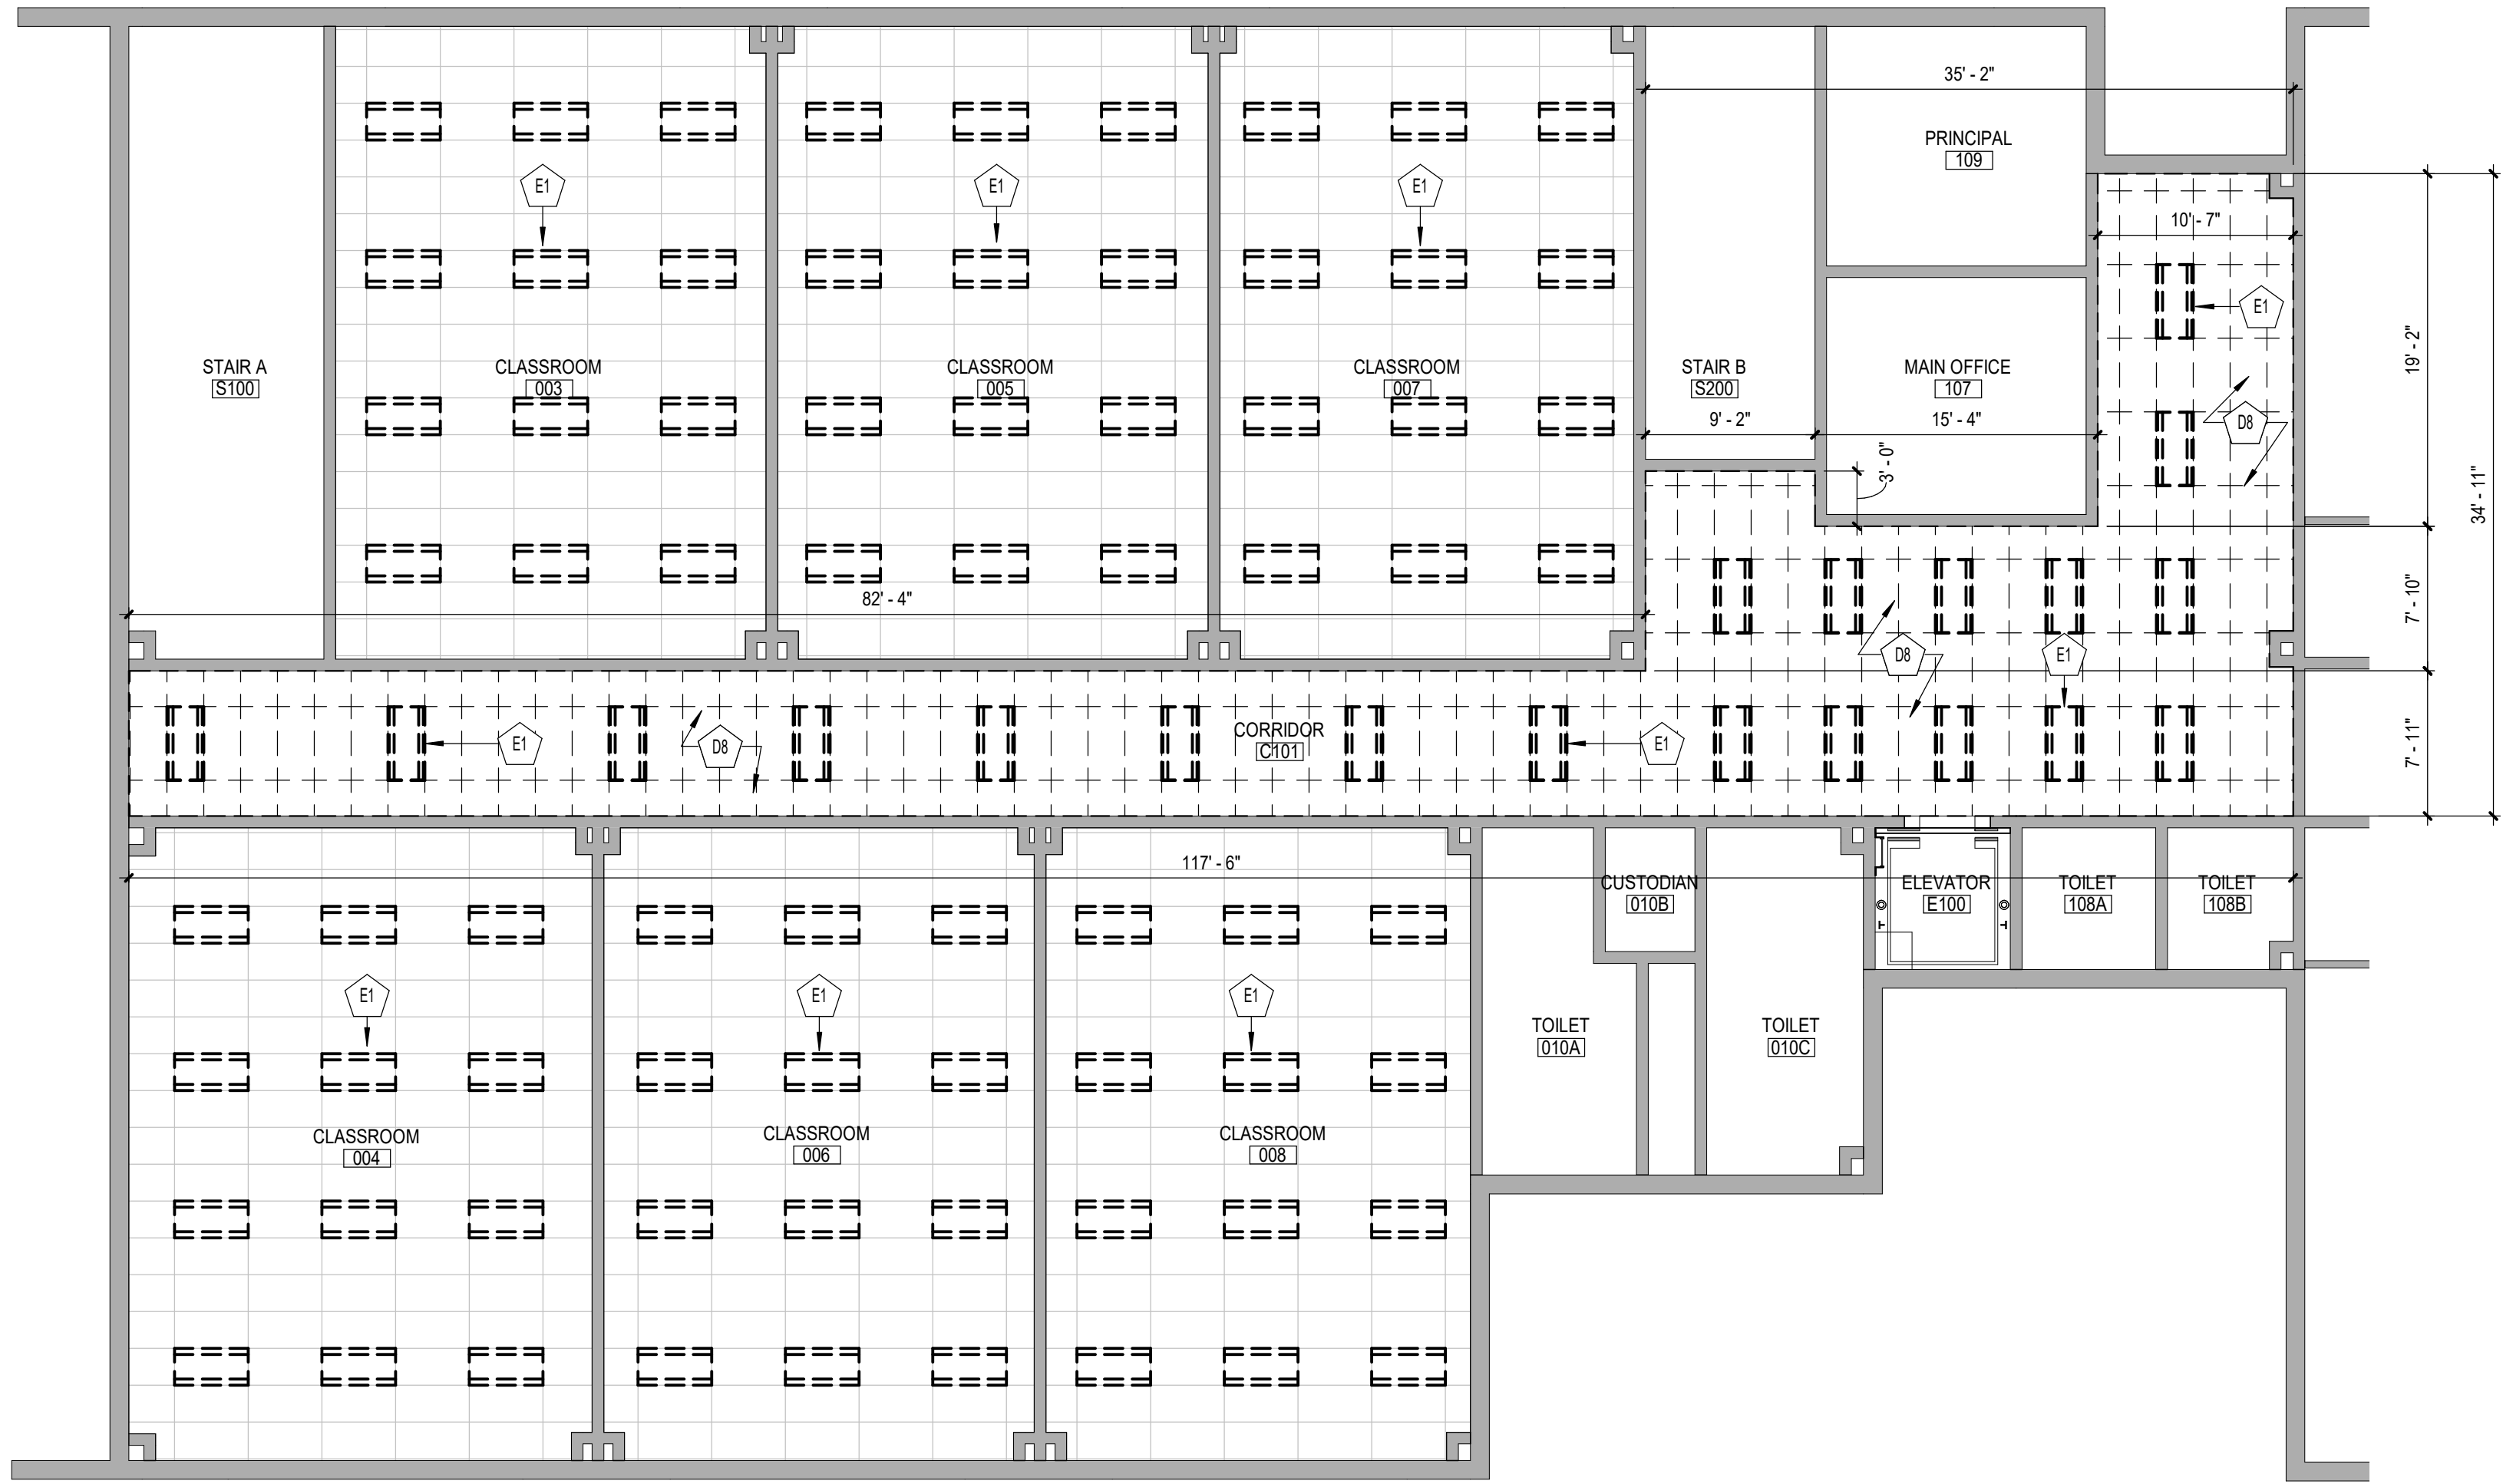

1 FIRST FLOOR DEMOLITION RCP - AREA 'A'
AD811 1/8" = 1'-0"

GENERAL NOTES

- COORDINATE ALL REMOVALS WITH NEW CONSTRUCTION.
- PATCH AND REPLACE EXISTING AND NEWLY CREATED HOLES IN WALLS (DUE TO REMOVAL) WITH MATERIALS TO MATCH EXISTING CONSTRUCTION.
- SALVAGED ITEMS SHALL BE TURNED OVER TO OWNER, UNO.
- ALL KEYED REMOVALS SHALL INCLUDE REMOVAL OF ANY AND ALL ANCHORING SYSTEMS INCLUDING OBJECTS EMBEDDED INTO EXISTING WALLS.
- REFER TO ASBESTOS AND MEP DRAWINGS FOR ADDITIONAL REMOVAL INFORMATION.
- PROVIDE TEMPORARY SHORING AS NECESSARY AT ALL AREAS OF WALL REMOVAL AND NEW WALL PENETRATIONS.
- DRILL CORNERS OF ALL NEW SAWCUT OPENING PRIOR TO SAWCUTTING, TO PREVENT CUTTING INTO SCHEDULED CONSTRUCTION TO REMAIN.


CEILING LEGEND

- QWB OR PLASTER CEILING, REFER TO DETAILS AND ROOM FINISH SCHEDULE
- SUSPENDED ACOUSTICAL PANEL CEILING SYSTEM
- CEILING HEIGHT ABOVE FINISHED FLOOR
- LIGHT FIXTURES
COORDINATE REMOVALS WITH ELECTRICAL DEMOLITION DRAWINGS
- HVAC EQUIPMENT
COORDINATE REMOVALS WITH MECHANICAL DEMOLITION DRAWINGS

KEY NOTES - DEMOLITION

KEY	DESCRIPTION
D8	REMOVE EXISTING ACT CEILING SYSTEM IN ITS ENTIRETY.
E1	LIGHT FIXTURE, TYPICAL. REFER TO ELECTRICAL DRAWINGS.

KEYPLAN

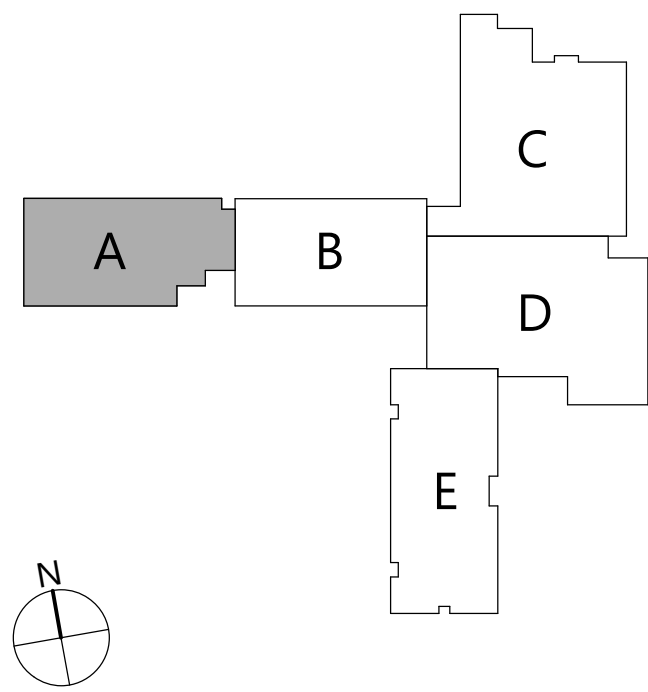

19 Front St., Newburgh, New York 12550-7601
845.561.3379 www.csarch.com

CSARCH

Consultant

HIGHLAND CENTRAL SCHOOL DISTRICT
HIGHLAND ELEMENTARY SCHOOL
2022 CAPITAL IMPROVEMENT PROJECT - PHASE 1

Project Title



DATE	DESCRIPTION

Drawn By: CSA
Checked By: CSA
Proj. #: 62-08-03-84-0-010-014
CSArch Proj. #: 197-2201.01
Issued for Bid: 08/18/23

Sheet Title
FIRST FLOOR
DEMOLITION
RCP - AREA 'A'

Sheet No.
HES
AD811

CONSTRUCTION DOCUMENTS

COPYRIGHT © ALL RIGHTS RESERVED