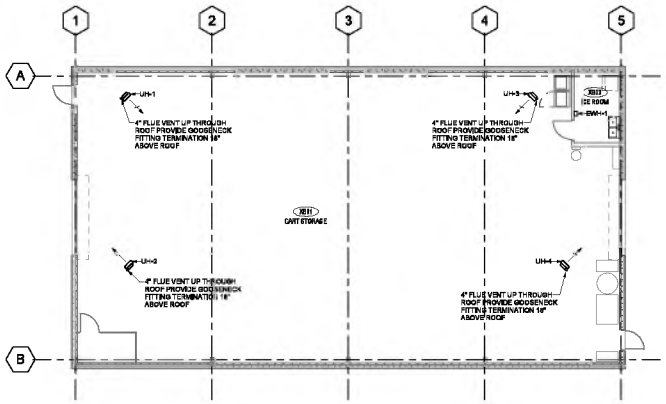

1 CART STORAGE BUILDING - FIRST FLOOR PLAN - HVAC
1/8" = 1'-0"

UNIT HEATER SCHEDULE - GAS(LP)

UNIT NO.	LOCATION	TYPE	AIR DELIVERY AIR FLOW (CFM)	ENT. AIR TEMP. (DEG. F)	LVG. AIR TEMP. (DEG. F)	GAS INPUT CAPACITY (BTU/H)	OUTPUT CAPACITY (BTU/H)	MIN. GAS PRESS BEFORE REGULATOR (in. WC)	EFFICIENCY MIN (%)	TEST PROCEDURE	FAN MOTOR RPM	HP	VOLTS	PHASE	MOUNTING HEIGHT (Ft.-In.)	THROW (Ft.)	MANUFACTURER / MODEL No.	REMARKS
UH-1	CART STORAGE	HORIZONTAL	660	70.0	120.0	60,000	48,200	-	82.0	ANSI Z83.8	-	-	-	-	8.0	30.0	MODINE MODEL HDB0	-
UH-2	CART STORAGE	HORIZONTAL	660	70.0	120.0	60,000	48,200	-	82.0	ANSI Z83.8	-	-	-	-	8.0	30.0	MODINE MODEL HDB0	-
UH-3	CART STORAGE	HORIZONTAL	660	70.0	120.0	60,000	48,200	-	82.0	ANSI Z83.8	-	-	-	-	8.0	30.0	MODINE MODEL HDB0	-
UH-4	CART STORAGE	HORIZONTAL	660	70.0	120.0	60,000	48,200	-	82.0	ANSI Z83.8	-	-	-	-	8.0	30.0	MODINE MODEL HDB0	-

WALL HEATER SCHEDULE - ELECTRIC

UNIT NO.	LOCATION	TYPE	AIR FLOW (CFM)	CAPACITY (MBH)	ELEC CHARACTERISTICS CAPACITY (KW)	VOLTS	PHASE	MANUFACTURER / MODEL No.	REMARKS
EWH-1		WALL MOUNTED	65	5.12	1.50	240	1	CHAR E MODEL CWH1207DSAF	-

REMARKS:
1. PROVIDE SURFACE MOUNTING FRAME KIT.

RW Monster Golf Cart Storage Building

94 CHALET ROAD
KAMELSHA LAKE, NY 12751

JCJARCHITECTURE
120 HUYSHOPE AVENUE
SUITE 400
HARTFORD, CT 06106
860.247.0223

©2019 JCJ Architecture

CONSULTANTS:

NOT FOR CONSTRUCTION

P.I.C. _____ L.D. _____
P.M. _____ P.A. _____

ISSUE 11/08/2019
JOB H18224-00 PHASE 14
DRAWN LB.
SCALE 1/8" = 1'-0"

REVISION #:

FLOOR PLAN & SCHEDULES - HVAC

M-110