

HP- MS-3,4,5,6,7,8,9 weigh 528 lbs

NOTE ATTACHED KINETICS REPORT NOT TO USE EXTERNAL VIBRATION ISOLATION ON INTERNALLY ISOLATED EQUIPMENT. ALSO NOT RECOMMENDED ON BY DAIKIN WITH REGARDS TO THE REFRIGERANT CONNECTED PIPING



LDR 1" DEFLECTION ISOLATION RAIL SET

IP UNITS (INCHES AND POUNDS)

TYPE	L	W	A	B	D	E	F	G	H	T	Z1	Z2
1-120/820	5.75	3.00	1.50	0.50	0.44	1.63	0.81	2.00	4.32	0.23	0.50	0.38

STANDARD RATINGS		SPRING COIL			SYSTEM RATED	
TYPE	SIZE	COLOR	HT.	O.D.	LOAD	DEFL.
LDR	1-120	BLUE	2.50	1.46	120	1.00
LDR	1-260	GREEN	2.50	1.46	260	1.00
LDR	1-480	GRAY	2.50	1.46	480	0.95
LDR	1-820	BROWN	2.50	1.46	820	0.95

STRUT CHANNEL OPTIONS	
OPTION	LENGTH (IN)
B	24.00
C	48.00

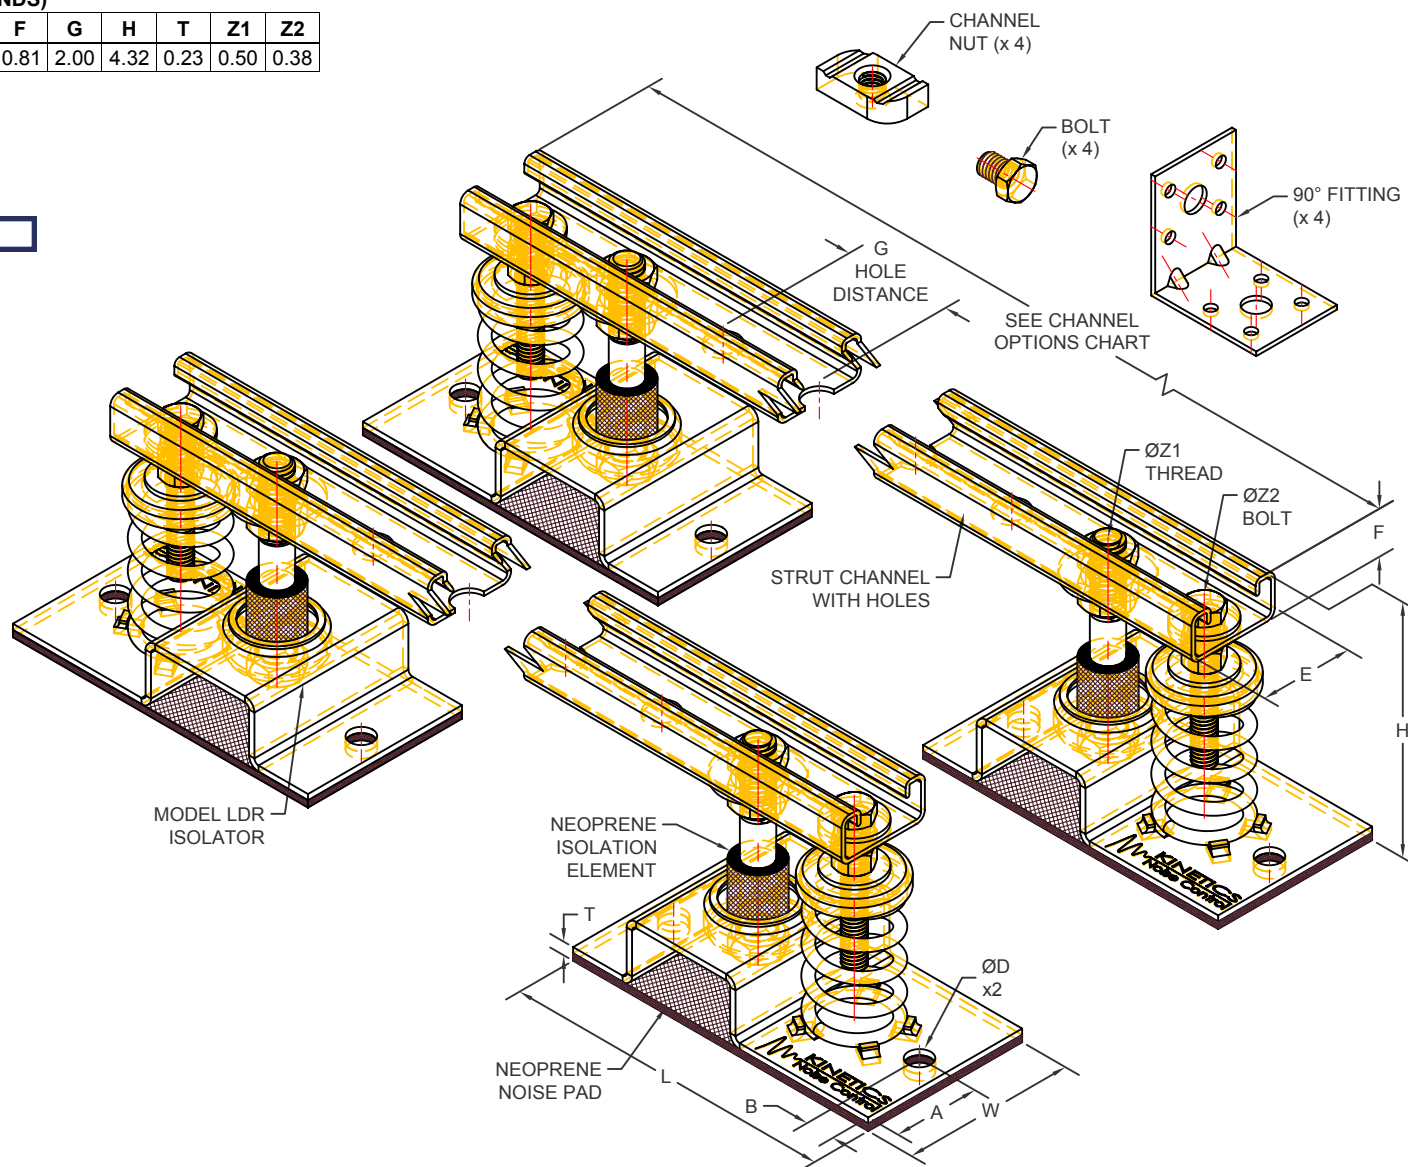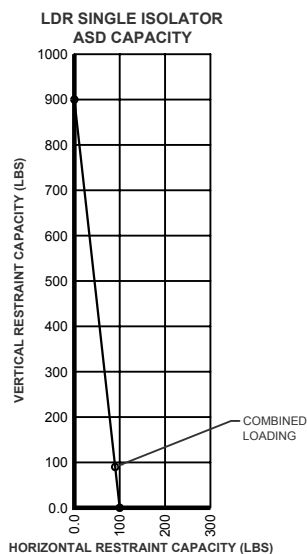

SPECIFICATIONS:

- ALL HARDWARE IS BRIGHT ZINC PLATED.
- HOUSING IS ZINC PLATED STEEL.
- SPRING COILS ARE POWDER COATED STEEL.
- ALL ELEMENTS ARE SAFE AT SOLID LOADING.
- LDR ISOLATION RAILS ARE TYPICALLY SOLD IN PAIRS.
- LDR ISOLATORS ARE DESIGNED TO BE USED WITH STANDARD UNISTRUT P4100 HS CHANNEL OR EQUAL.
- STRUT CHANNEL USES STANDARD CHANNEL NUTS WHICH CAN BE PURCHASED SEPARATELY.



KINETICS NOISE CONTROL, INC
6300 IRELAN PL,
DUBLIN, OH 43017 USA
Ph: 614 889-0480, Fax: 614 889-0540
www.kineticsnoise.com

Model:
LDR-1-120/820
ISOLATION SET

By: BB
Date: 01/23/17
Revised: 02/05/18 / BB

Drawing No:
S-01.19-10