


JOB: 103 Church Street - Nanuet - BUY

REPRESENTATIVE: Wallace Eannace Associates, Inc

UNIT TAG:
ENGINEER: Sage Engineering
CONTRACTOR:
ORDER NO.
SUBMITTED BY: Alex Curran
APPROVED BY:
DATE: 9/11/2023
DATE:
DATE:


Centrifugal Pump Accessories

Triple Duty[®] Valve – with Flanged Ends

Straight Pattern with Soft Seat Nonslam Check Valve,
Throttling Valve, Calibrated Balance Valve and Shutoff Valve

FOR P-HS-3-4

DESCRIPTION

The Triple Duty Valve is a quiet operating heavy-duty valve which performs all of the functions normally required on the discharge side of hydronic system pumps.

The valve serves as a nonslam check valve as needed for zoned pumping, parallel and standby pumping, and condenser water applications. The spring loaded disk prevents valve chatter, and assures positive shutoff.

Bell & Gossett's Triple Duty Valve has a calibrated nameplate for rough system balance. The Triple Duty Valve is also equipped with Model RV-125A brass readout valves for more accurate system balance.


The calibrated nameplate allows the valve to be returned to the original balance position after shutoff.

To repack under system pressure, turn the valve stem to the fully open position. Turning the valve stem to the closed position provides shutoff.

CONSTRUCTION MATERIALS

Body: Cast Iron with Bronze Seat
 Disc: Brass with EPDM Seat Insert
 Stem: Stainless Steel
 Spring: Stainless Steel
 Packing: Teflon-Graphite (Asbestos-free)
 Gasket: Asbestos-free
 Readout Valve: Brass with EPT insert, Check Valve & Gasket

SCHEDULE Maximum Working Pressure 175 PSIG (1,207 kPa) – Maximum Operating Temperature 250°F (121°C)

MODEL NO.	PART #	FLANGE SIZE INCHES (mm)	MAXIMUM RECOMMENDED FLOW GPM (m ³ /hr)	TAGGING INFORMATION	QUANTITY
3DS-2S	132121	2 (50.8)	275 (62)		
3DS-2-1/2S	132122	2-1/2 (63.5)	390 (89)		
3DS-3S	132123	3 (76.2)	670 (152)		
3DS-4S	132124	4 (101.6)	1200 (272)		
3DS-5S	132125	5 (127)	1675 (380)		
 3DS-6S	132126	6 (152.4)	2500 (568)	TDV-P-3 & 4	2
3DS-8S	132127	8 (203.2)	3585 (814)		
3DS-10S	132128	10 (254)	6150 (1397)		
3DS-12S	132129	12 (304.8)	8050 (1828)		
3DS-14S	132120	14 (355.6)	9500 (2159)		

PERFORMANCE DATA


Cv RATING REFERENCE	Cv RATING AT 100% OF STEM RISE ¹ (m³/hr)									
	3DS-2S	3DS-2-1/2S	3DS-3S	3DS-4S	3DS-5S	3DS-6S	3DS-8S	3DS-10S	3DS-12S	3DS-14S
A	83 (18.9)	119 (27.0)	204 (43.6)	365 (82.9)	502 (114.0)	746 (169.4)	1,085 (246.4)	1,851 (420.4)	2,446 (555.5)	3,000 (681.3)
B	77 (17.5)	117 (26.6)	191 (43.4)	320 (72.7)	497 (112.9)	701 (159.2)	1,079 (245.0)	1,826 (414.7)	2,430 (551.9)	3,225 (732.4)


A. FLOWMETER Cv FOR BALANCING. MINIMUM READING OF 3 FEET (.9 m) OF PRESSURE DROP REQUIRED FOR ACCURATE FLOW DETERMINATION.

B. Cv FOR CALCULATING PRESSURE DROP ACCROSS THE VALVE.

NOTE: MAXIMUM RECOMMENDED PRESSURE DROP SHOULD NOT EXCEED 25 FEET (7.6 m).

* CONTACT YOUR LOCAL BELL & GOSSETT REPRESENTATIVE FOR COMPLETE PERFORMANCE CURVE DATA.

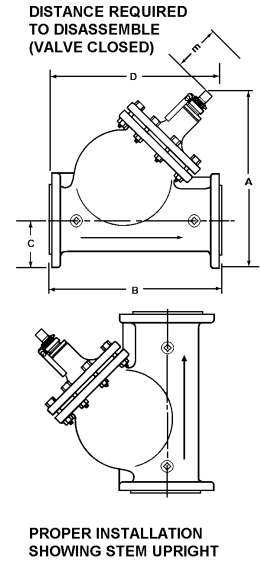

MODEL NUMBER	DIMENSIONS IN INCHES (mm)							APPROX. SHPG. WT. LBS. (Kg)
	FLANGE SIZE ¹	A		B	C	D	E	
		OPEN	CLOSED					
3DS-2S	2 (50.8)	10-3/8 (264)	9-3/4 (248)	8-3/8 (213)	3 (76.2)	8-3/4 (222)	3-1/2 (89)	24 (11)
3DS-2-1/2S	2-1/2 (63.5)	11 (279)	10-1/4 (260)	8-7/8 (225)	3-1/2 (89)	8-3/4 (222)	3-1/2 (89)	28 (13)
3DS-3S	3 (76.2)	12-3/8 (314)	11-7/16 (291)	10 (254)	3-3/4 (98)	9-3/4 (248)	3-15/16 (100)	39 (18)
3DS-4S	4 (101.6)	16-7/8 (429)	15-7/8 (403)	14-1/2 (368)	4-1/2 (114)	14-1/16 (357)	6-1/4 (159)	94 (43)
3DS-5S	5 (127)	18-1/2 (470)	17-1/4 (438)	16 (406)	5 (127)	15-3/16 (386)	6-7/8 (175)	114 (52)
 3DS-6S	6 (152.4)	20-3/4 (527)	19-1/4 (489)	18 (457)	5-1/2 (140)	17 (432)	8-1/4 (210)	186 (85)
3DS-8S	8 (203.2)	24-3/4 (629)	23-1/4 (591)	21-1/2 (546)	6-3/4 (172)	20-7/16 (519)	10-3/8 (264)	316 (144)
3DS-10S	10 (254)	28-7/8 (733)	26-1/2 (673)	25-1/2 (648)	8 (203)	23-1/4 (590)	12-1/4 (311)	458 (208)
3DS-12S	12 (304.8)	33-1/2 (851)	31-1/8 (791)	30 (762)	9-1/2 (241)	26-9/16 (675)	14-1/2 (368)	662 (301)
3DS-14S	14 (355.6)	37 (940)	35-1/2 (902)	33-3/4 (857)	10-1/2 (267)	29-5/8 (753)	16-1/2 (419)	780 (355)

¹ STANDARD 125 PSIG (862 kPa) ANSI FLANGES.

Dimensions are subject to change. Not to be used for construction purposes unless certified.

TYPICAL SPECIFICATIONS

Furnish and install as shown on plans, a straight pattern valve designed to perform the functions of a nonslam check valve, throttling valve, shutoff valve and calibration balancing valve.

The valve shall be a heavy-duty cast iron construction with standard 125 psig (862 kPa) ANSI flanged connections, and rated for a maximum working pressure of 175 psig (1207 kPa) at 250°F (121°C). The valve shall be fitted with a bronze seat, replaceable brass disc with EPDM seat insert, stainless steel stem, and chatter-preventing spring and calibrated nameplate. The valve design shall permit repacking under full system pressure.

The valve shall be equipped with brass readout valve (with integral check valve) for taking differential pressure readings across the orifice for accurate system balance.

Valve Cv rating at full open position not to be less than _____. (Refer to the 100% stem rise value shown in row "B" for required valve.)

All valves shall be ITT Bell & Gossett Model No. 3DS-____S Triple Duty Valve.

Xylem Inc.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847)966-3700 Fax: (847)965-8379
www.bellgossett.com

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
ESP-REP v2023.03 © 2013 Xylem Inc.

xylem
Let's Solve Water