



Rombout Fire District
New Station No.2

1548 NYS Route 52
Fishkill, NY

Project Number: 18142

Notice to All Contractors:

The following amplifications, corrections, etc., to plans and specifications are hereby drawn to your notice and shall be incorporated in contract:

Addendum No. 5 (4 pages total, including cover sheet)

Date: January 13, 2023

Att: Estimating Department

Sent By: Raymond VanVoorhis

Please sign and return that you have received this email:

Received By: _____

Date: _____

This Transmission is (4) PDF - 4 pages. Please contact LMV if all pages are not received.

Liscum McCormack VanVoorhis, LLP - Architecture • Planners • Interiors
181 Church Street
Poughkeepsie, New York 12601
Tel: (845) 452-2268 Fax: (845) 452-3752

ROMBOUT FIRE DISTRICT - NEW FIRE STATION #2

1548 N.Y.S. Route 52, Fishkill, New York

ADDENDUM NO. 5

January 16, 2023

1. The Bid date and time remains the same **January 18, 2023 @ 2:00 PM**. No additional questions will be accepted.
2. To clarify Item #17 in Addendum #4 dated 1/12/23, the **Generac** and **Kohler** manufacturer's cut sheets and information listed in items #17.1-4 were for information purposes and are not part of the bid documents. The Rombout Fire District is providing the **Generac** materials shown and the electrician is to install these. The electrician will also need to provide and install a NEMA 3R 120/208v 3 phase 16 circuit load center.
3. The General Contractor, as stated in Section 000700- 1.11 WORK COVERED BY OWNER, Landscaping- "The Landscape drawings (by The Michael Boice Collaboration) L1 & L2, - the landscape beds and lawns are by the GC and the landscaping plants, trees, etc. will be by the Owner's subcontractor. ". Attached are drawings L1 and L2, for reference.

End of Addendum No. 5

Page 2

Addendum No. 5

PLANTING NOTES

1. All plant material must conform to American Standard for Nursery Stock ANSI Z60.1-2014

2. Voluntary Alternates/Plant substitutions must be approved by the Designer/Landscape Architect

3. All plant material delivered to the site and or planted must be maintained by the Landscape Contractor until the scope of agreed Landscape work is complete

4. All wire baskets must be either removed from the root ball or cut from the root ball after placing the plant in the planting hole

5. All burlap must be removed from root balls or cut away from the root ball after placing the plant in the planting hole. All planting holes must be 50% wider than the root ball or container root mass.

6a. The indigenous soil or back fill for major trees must not be conditioned unless rocky or unsuitable conditions are present

6b. Incorporate 50% organic soil media and slow release fertilizer per instructions into indigenous soil used to back fill shrubs, perennials and ground cover. Ground cover areas in particular may require mechanical tilling in an effort to create a friable soil texture

6c. Any soil glazing created by the back of the shovel shall be removed by reversing the shovel and caving in the planting hole

7. A soil pH test is highly recommended before planting begins

8. All existing unwanted plant material and weeds and their roots systems must be completely removed from planting beds prior to installing new plant material. The use of Round-Up may be required to eliminate invasive/stoloniferous weeds. Only a licensed professional may apply Round-Up

9. Only non-dyed natural mulch may be used. Install mulch to a depth of 2" - 3"

10. Stake any trees or plants that may be affected by high wind loads.

11. Where an automatic irrigation system is recommended, the Landscape Contractor shall provide proof of CID, CIC, CIT - Certified Irrigation Designer, Contractor, Technician through the Irrigation Association


12. It is the Landscape Contractor's responsibility to comply with all local and state codes. Any permits required for the Landscape Contractor's work must be obtained by the Landscape Contractor

13. It is the Landscape Contractor's responsibility to coordinate the planting schedule with the owner


14. Any deviations from the design due to unknown site conditions must be brought to the attention of the Designer/Landscape Architect

15. All Grasses and perennials must be cut back either in fall or early spring - before new foliage emerges. Elymus Grass must not be pruned lower than 12"


PLANTING LIST						
GENUS SPECIE	COMMON NAME	SIZE	KEY	QUANTITY	NOTES	Zone
Physocarpus opulifolius 'Diablo'	Diablo Nine Bark	5 gal	Labeled	5	Native, purple leaves white flowers	2-7
Elymus arenarius 'Blue Dune'	Blue Dune Lyme Grass	2 gal	Labeled	101	Introduced Drought Tolerant	4-9
Rudbeckia fulgida 'Goldsturm'	Black Eyed Susan	2 gal	Labeled	91	Yellow Flowers summer	3-9
Liriope muscari 'Variegata'	Variegated Liriope	4" pots	Labeled	4,358	Low Grassy texture, Purple Flowers	5-10
Buxus sinica insularis 'Winter Gem'	Winter Gem Boxwood	24" - 36" B&B	Labeled	14	Evergreen shrub	5-9
Thuja plicata 'Green Giant'	Green Giant Arborvitae	7' - 8' B&B	Labeled	10	Evergreen tree, deer resistant, fast growing	5-8




CONTAINER PLANTING SPECIFICATIONS

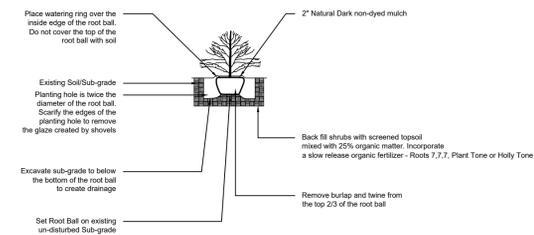

SHRUB PLANTING SPECIFICATIONS

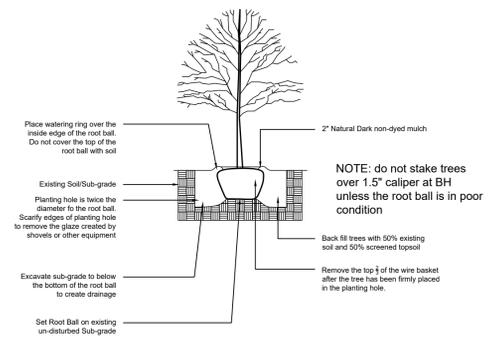

TREE PLANTING SPECIFICATION



845-702-1004
11 South Fowlerhouse Road Wappinger Falls, New York 12590

The Michael Boice Collaboration
DESIGNERS AND MAKERS OF FINE LANDSCAPES

Rombout Fire House PLANT TABLE AND SPECIFICATIONS
1548 Rt 52 Fishkill, New York

Revisions |

Date | July 28, 2021

Scale | 1" = 20' - 0"

