



Request For Information

To: Ed Arcari
RE: Halle Building Gymnasium Alterations


RFI # 1 Please provide the finish for the aluminum window framing
Clear anodized aluminum for all aluminum window and storefront framing (Interior & exterior)


Hardware schedule calls out for door types C & D to receive Sargent 10 Line lever handles. These are specified to be Kawneer 350 medium style doors, this hardware will require wide style doors. Advise if wide style doors are to be priced.

RFI #2 **Wide style doors are acceptable for Door Types C & D**

Window Type W1 is a double hung window. The specified Kawneer 451T system does not offer a double hung product. Kawneer does offer a few double hung products, please advise on the window spec for this opening.

RFI # 3 **Maintain specified Kawneer 451T system at window W1. Window to be fixed above horizontal mullion with 2 awning windows (451T Glassvent) below.**

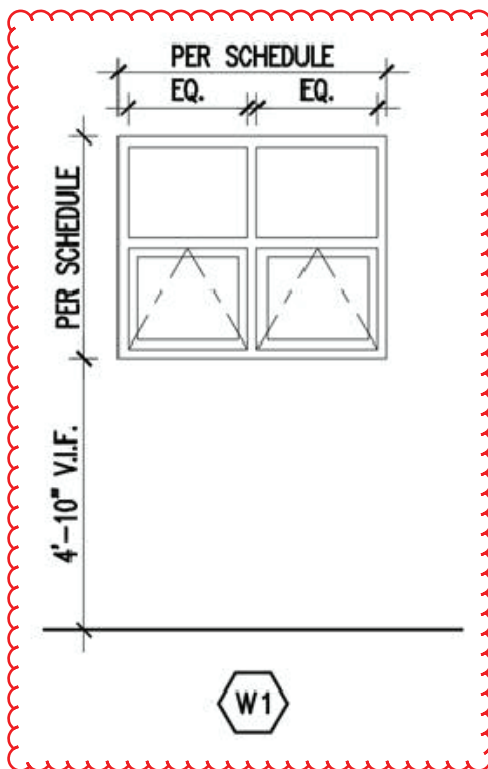



9/19/2023

se doors
s, please