

VIEW A-A
SCALE 1:30

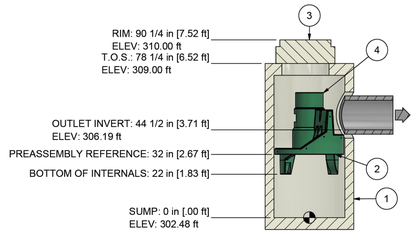

SECTION B-B
SCALE 1:30

1. MANHOLE WALL AND SLAB THICKNESS ARE NOT TO SCALE.
2. CONTACT HYDRO INTERNATIONAL FOR A BOTTOM OF STRUCTURE ELEVATION PRIOR TO SETTING FIRST DEFENSE MANHOLE.
3. CONTRACTOR TO CONFIRM RIM, PIPE INVERTS, PIPE DIA, AND PIPE ORIENTATION PRIOR TO RELEASE OF UNIT TO FABRICATION.
4. CONTRACTOR IS RESPONSIBLE FOR MATERIALS AND LABOR TO BRING CASTINGS TO FINISHED GRADE.
5. ACTUAL DEPTH OF STRUCTURE MAY VARY DEPENDING ON AVAILABLE PRECAST FORMS. CONTRACTOR TO MEASURE HEIGHT OF STRUCTURE TO ENSURE THAT DEPTH OF EXCAVATION IS CORRECT.
6. UNIT MUST BE INSTALLED ON A LEVEL BASE. MANUFACTURER RECOMMENDS A MINIMUM OF 6" LEVEL ROCK BASE UNLESS SPECIFIED. CONTRACTOR IS RESPONSIBLE TO VERIFY BASE SPECIFICATIONS.
7. ALL PIPES SHALL BE SEALED WATERTIGHT WITH A NON-SHRINK GROUT OR BOOTS AND SHALL MEET OR EXCEED REGIONAL PIPE CONNECTION STANDARDS.

REVISION HISTORY

REV	BY	DESCRIPTION	DATE
A	KSM	UPDATED PLANS	1/9/2024
-	KSM	FIRST RELEASE	1/5/2024

PROJECTION

IF IN DOUBT ASK

DATE:	SCALE:
1/5/2024	1:30

DRAWN BY:	CHECKED BY:	APPROVED BY
KSM		

Title:
3-ft DIAMETER
FIRST DEFENSE HIGH CAPACITY

MTD D-3
IV2 ROCKLAND LOGISITICS
VILLAGE OF SUFFERN, NY

Patent: www.hydro-int.com/patents

Hydro International
hydro-int.com

©2023 HYDRO INTERNATIONAL

WEIGHT:	MATERIAL:

STOCK NUMBER:
4

DRAWING NO:
24_12_0026-3ftFDHC-4

SHEET SIZE:	SHEET:	Rev:
B	1 OF 1	-

CAPACITIES:
1. PEAK HYDRAULIC FLOW: 15.0 cfs (424 l/s)
2. SEDIMENT STORAGE CAPACITY: 0.4 cu. yd. (0.3 cu. m.)
3. MAXIMUM INLET/OUTLET PIPE DIAMETERS: 18 in. (450 mm)

PRODUCT SPECIFICATIONS:
A. The treatment system shall use an induced vortex to separate pollutants from stormwater runoff.
B. The treatment system shall fit within the limits of excavation (area and depth) as shown in the project plans and will not exceed the dimensions for the design flow rates specified herein.
C. The treatment system shall convey the Peak On-line Flow Rates of up to 15 cfs without causing upstream surcharge conditions.
D. The treatment system shall be capable of capturing and retaining fine silt and sand size particles.
E. Unit shall conform to HS20-44 load ratings.

PARTS LIST

ITEM	QTY	SIZE (in)	DESCRIPTION	TYPE
1	1	36	I.D. PRECAST MANHOLE	
2	1		LEDGER SUPPORT	
3	1	24	FRAME AND GRATE (SQUARE)	
4	1		SEPARATION MODULE	
5	1	15	OUTLET PIPE (BY OTHERS)	RCP



VIEW A-A
SCALE 1:30

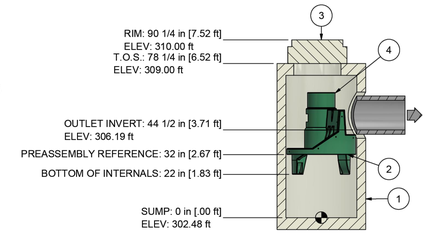

SECTION B-B
SCALE 1:30

1. MANHOLE WALL AND SLAB THICKNESS ARE NOT TO SCALE.
2. CONTACT HYDRO INTERNATIONAL FOR A BOTTOM OF STRUCTURE ELEVATION PRIOR TO SETTING FIRST DEFENSE MANHOLE.
3. CONTRACTOR TO CONFIRM RIM, PIPE INVERTS, PIPE DIA, AND PIPE ORIENTATION PRIOR TO RELEASE OF UNIT TO FABRICATION.
4. CONTRACTOR IS RESPONSIBLE FOR MATERIALS AND LABOR TO BRING CASTINGS TO FINISHED GRADE.
5. ACTUAL DEPTH OF STRUCTURE MAY VARY DEPENDING ON AVAILABLE PRECAST FORMS. CONTRACTOR TO MEASURE HEIGHT OF STRUCTURE TO ENSURE THAT DEPTH OF EXCAVATION IS CORRECT.
6. UNIT MUST BE INSTALLED ON A LEVEL BASE. MANUFACTURER RECOMMENDS A MINIMUM OF 6" LEVEL ROCK BASE UNLESS SPECIFIED. CONTRACTOR IS RESPONSIBLE TO VERIFY BASE SPECIFICATIONS.
7. ALL PIPES SHALL BE SEALED WATERTIGHT WITH A NON-SHRINK GROUT OR BOOTS AND SHALL MEET OR EXCEED REGIONAL PIPE CONNECTION STANDARDS.

REVISION HISTORY

REV	BY	DESCRIPTION	DATE
A	KSM	UPDATED PLANS	1/5/2024
-	KSM	FIRST RELEASE	1/5/2024

PROJECTION

IF IN DOUBT ASK

DATE:	SCALE:
1/5/2024	1:30

DRAWN BY:	CHECKED BY:	APPROVED BY
KSM		

Title:
3-ft DIAMETER
FIRST DEFENSE HIGH CAPACITY

MTD D-4
IV2 ROCKLAND LOGISITICS
VILLAGE OF SUFFERN, NY

Patent: www.hydro-int.com/patents

Hydro International
hydro-int.com

©2023 HYDRO INTERNATIONAL

WEIGHT:	MATERIAL:

STOCK NUMBER:
5

DRAWING NO:
24_12_0026-3ftFDHC-5

SHEET SIZE:	SHEET:	Rev:
B	1 OF 1	-

CAPACITIES:
1. PEAK HYDRAULIC FLOW: 15.0 cfs (424 l/s)
2. SEDIMENT STORAGE CAPACITY: 0.4 cu. yd. (0.3 cu. m.)
3. MAXIMUM INLET/OUTLET PIPE DIAMETERS: 18 in. (450 mm)

PRODUCT SPECIFICATIONS:
A. The treatment system shall use an induced vortex to separate pollutants from stormwater runoff.
B. The treatment system shall fit within the limits of excavation (area and depth) as shown in the project plans and will not exceed the dimensions for the design flow rates specified herein.
C. The treatment system shall convey the Peak On-line Flow Rates of up to 15 cfs without causing upstream surcharge conditions.
D. The treatment system shall be capable of capturing and retaining fine silt and sand size particles.
E. Unit shall conform to HS20-44 load ratings.

PARTS LIST

ITEM	QTY	SIZE (in)	DESCRIPTION	TYPE
1	1	36	I.D. PRECAST MANHOLE	
2	1		LEDGER SUPPORT	
3	1	24	FRAME AND GRATE (SQUARE)	
4	1		SEPARATION MODULE	
5	1	15	OUTLET PIPE (BY OTHERS)	RCP



VIEW A-A
SCALE 1:30

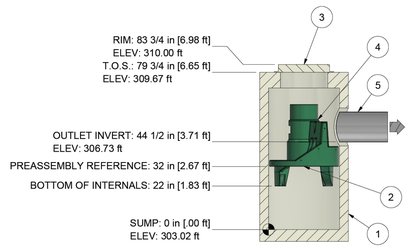

SECTION B-B
SCALE 1:30

1. MANHOLE WALL AND SLAB THICKNESS ARE NOT TO SCALE.
2. CONTACT HYDRO INTERNATIONAL FOR A BOTTOM OF STRUCTURE ELEVATION PRIOR TO SETTING FIRST DEFENSE MANHOLE.
3. CONTRACTOR TO CONFIRM RIM, PIPE INVERTS, PIPE DIA, AND PIPE ORIENTATION PRIOR TO RELEASE OF UNIT TO FABRICATION.
4. CONTRACTOR IS RESPONSIBLE FOR MATERIALS AND LABOR TO BRING CASTINGS TO FINISHED GRADE
5. ACTUAL DEPTH OF STRUCTURE MAY VARY DEPENDING ON AVAILABLE PRECAST FORMS. CONTRACTOR TO MEASURE HEIGHT OF STRUCTURE TO ENSURE THAT DEPTH OF EXCAVATION IS CORRECT.
6. UNIT MUST BE INSTALLED ON A LEVEL BASE. MANUFACTURER RECOMMENDS A MINIMUM OF 6' LEVEL ROCK BASE UNLESS SPECIFIED. CONTRACTOR IS RESPONSIBLE TO VERIFY BASE SPECIFICATIONS.
7. ALL PIPES SHALL BE SEALED WATERTIGHT WITH A NON-SHRINK GROUT OR BOOTS AND SHALL MEET OR EXCEED REGIONAL PIPE CONNECTION STANDARDS.

REVISION HISTORY

REV	BY	DESCRIPTION	DATE
A	RSH	CHANGES TO RIM AND INVERT ELEVS/REMOVED INLET PIPE	1/10/2024
-	WCS	FIRST RELEASE	1/8/2024

PROJECTION

IF IN DOUBT ASK

DATE:	SCALE:
1/8/2024	1:30

DRAWN BY:	CHECKED BY:	APPROVED BY
WCS		

Title:
3-ft DIAMETER
FIRST DEFENSE OPTIMUM

MTD E-2
IV2 ROCKLAND LOGISTICS
VILLAGE OF SUFFERN, NY

Patent: www.hydro-int.com/patents

Hydro International
hydro-int.com

©2023 HYDRO INTERNATIONAL

WEIGHT:	MATERIAL:

STOCK NUMBER:
1

DRAWING NO:
24_12_0026-3ftFDO-1

SHEET SIZE:	SHEET:	Rev:
B	1 OF 1	A

CAPACITIES:
1. PEAK HYDRAULIC FLOW: 15.0 cfs (424 l/s)
2. SEDIMENT STORAGE CAPACITY: 0.4 cu. yd. (0.3 cu. m.)
3. MAXIMUM INLET/OUTLET PIPE DIAMETERS: 18 in. (450 mm)

PRODUCT SPECIFICATIONS:
A. The treatment system shall use an induced vortex to separate pollutants from stormwater runoff.
B. The treatment system shall fit within the limits of excavation (area and depth) as shown in the project plans and will not exceed the dimensions for the design flow rates specified herein.
C. The treatment system shall convey the Peak On-line Flow Rates of up to 15 cfs without causing upstream surcharge conditions.
D. The treatment system shall be capable of capturing and retaining fine silt and sand size particles.
E. Unit shall conform to HS20-44 load ratings.

PARTS LIST

ITEM	QTY	SIZE (in)	DESCRIPTION	TYPE
1	1	36	I.D. PRECAST MANHOLE	
2	1		LEDGER SUPPORT	
3	1	24	FRAME AND GRATE (SQUARE)	
4	1		SEPARATION MODULE	
5	1	15	OUTLET PIPE (BY OTHERS)	HDPE



VIEW A-A
SCALE 1:30

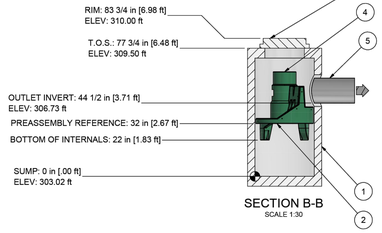

SECTION B-B
SCALE 1:30

1. MANHOLE WALL AND SLAB THICKNESS ARE NOT TO SCALE.
2. CONTACT HYDRO INTERNATIONAL FOR A BOTTOM OF STRUCTURE ELEVATION PRIOR TO SETTING FIRST DEFENSE MANHOLE.
3. CONTRACTOR TO CONFIRM RIM, PIPE INVERTS, PIPE DIA, AND PIPE ORIENTATION PRIOR TO RELEASE OF UNIT TO FABRICATION.
4. CONTRACTOR IS RESPONSIBLE FOR MATERIALS AND LABOR TO BRING CASTINGS TO FINISHED GRADE
5. ACTUAL DEPTH OF STRUCTURE MAY VARY DEPENDING ON AVAILABLE PRECAST FORMS. CONTRACTOR TO MEASURE HEIGHT OF STRUCTURE TO ENSURE THAT DEPTH OF EXCAVATION IS CORRECT.
6. UNIT MUST BE INSTALLED ON A LEVEL BASE. MANUFACTURER RECOMMENDS A MINIMUM OF 6" LEVEL ROCK BASE UNLESS SPECIFIED. CONTRACTOR IS RESPONSIBLE TO VERIFY BASE SPECIFICATIONS.
7. ALL PIPES SHALL BE SEALED WATERTIGHT WITH A NON-SHRINK GROUT OR BOOTS AND SHALL MEET OR EXCEED REGIONAL PIPE CONNECTION STANDARDS.

REVISION HISTORY

REV	BY	DESCRIPTION	DATE
A	DAM	UPDATED OUTLET INVERT	01/12/2024
-	WCS	FIRST RELEASE	1/8/2024

PROJECTION

IF IN DOUBT ASK

DATE:	SCALE:
1/9/2024	1:30

DRAWN BY:	CHECKED BY:	APPROVED BY
WCS		

Title:
3-ft DIAMETER
FIRST DEFENSE OPTIMUM

E-3
IV2 ROCKLAND LOGISTICS
VILLAGE OF SUFFERN, NY

Patent: www.hydro-int.com/patents

Hydro International
hydro-int.com

©2023 HYDRO INTERNATIONAL

WEIGHT:	MATERIAL:

STOCK NUMBER:
1

DRAWING NO:
24_12_0026-3ftFDO-1

SHEET SIZE:	SHEET:	Rev:
B	1 OF 1	-

CAPACITIES:
1. PEAK HYDRAULIC FLOW: 15.0 cfs (424 l/s)
2. SEDIMENT STORAGE CAPACITY: 0.4 cu. yd. (0.3 cu. m.)
3. MAXIMUM INLET/OUTLET PIPE DIAMETERS: 18 in. (450 mm)

PRODUCT SPECIFICATIONS:
A. The treatment system shall use an induced vortex to separate pollutants from stormwater runoff.
B. The treatment system shall fit within the limits of excavation (area and depth) as shown in the project plans and will not exceed the dimensions for the design flow rates specified herein.
C. The treatment system shall convey the Peak On-line Flow Rates of up to 15 cfs without causing upstream surcharge conditions.
D. The treatment system shall be capable of capturing and retaining fine silt and sand size particles.
E. Unit shall conform to HS20-44 load ratings.

PARTS LIST

ITEM	QTY	SIZE (in)	DESCRIPTION	TYPE
1	1	36	I.D. PRECAST MANHOLE	
2	1		LEDGER SUPPORT	
3	1	24	FRAME AND GRATE (SQUARE)	
4	1		SEPARATION MODULE	
5	1	15	OUTLET PIPE (BY OTHERS)	HDPE

THIS PLAN SET IS FOR PERMITTING PURPOSES ONLY AND MAY NOT BE USED FOR CONSTRUCTION

Rev.	Date	Comments	By
5	01/17/24	REV. PER PLANNING BOARD SUBMISSION	CAM
4	06/13/23	REV. PER VILLAGE AND COUNTY COMMENTS	CAM
3	05/24/23	REV. PER ACOE COMMENTS	DM/MC
2	09/01/22	REV. PER TOWNSHIP AND COUNTY COMMENTS	ALP1
1	04/29/22	REV. PER CLIENT AND COUNTY COMMENTS	CAM

DYNAMIC ENGINEERING
LAND DEVELOPMENT CONSULTING • PERMITTING • GEOTECHNICAL • ENVIRONMENTAL • SURVEY • PLANNING & ZONING
Offices conveniently located in:
Lake Como, New Jersey T: 732.974.0198 | Chester, New Jersey T: 908.879.9229 | Newark, New Jersey T: 973.755.7200 | Toms River, New Jersey T: 732.678.0000
Allen, Texas T: 972.534.2100 | Austin, Texas T:512.646.2646 | Houston, Texas T: 281.789.6400 | Delray Beach, Florida T: 561.921.8370
Newtown, Pennsylvania T: 267.685.0276 | Philadelphia, Pennsylvania T: 215.233.4888 | Bethlehem, Pennsylvania T: 610.598.4400
1904 Main Street
Lake Como, NJ 07719
T: 732.974.0198
F: 732.974.3521
www.dynamicec.com

TITLE:
HYDRO INTERNATIONAL DETAILS

PROJECT: **IV2 ROCKLAND LOGISTICS, LLC**
PROPOSED INDUSTRIAL PARK AT 25 OLD MILL ROAD
SECTION 55.22 BLOCK 1, LOT 1; SECTION 55.37, BLOCK 1, LOT 31
OLD MILL ROAD AND HEMION ROAD (CR 93)
VILLAGE OF SUFFERN, ROCKLAND COUNTY, NEW YORK

JOB No:	DATE:
3709-99-004	12/17/2021
DRAWN BY: UV	SCALE: (H) NOT TO (V) SCALE
DESIGNED BY: JMS	SHEET No: 121 OF 132
CHECKED BY: JMS	
CHECKED BY: ZAK	Rev. # 5

ZACHARY A. KAMM
PROFESSIONAL ENGINEER
NEW YORK LICENSE No. 107071

JOSHUA M. SCHWALD
PROFESSIONAL ENGINEER
NEW YORK LICENSE No. 097639

811 PROTECT YOURSELF
ALL STATES REQUIRE NOTIFICATION OF EXCAVATORS, DESIGNERS, OR ANY PERSON PREPARING TO DISTURB THE EARTH'S SURFACE ANYWHERE IN ANY STATE
FOR STATE SPECIFIC DIRECT PHONE NUMBERS VISIT: WWW.CALL811.COM

Plotted: 01/17/24 – 12:04 PM, By: aroyes, – Product Ver: 24.3s (LMS Tech)
File: P:\DESPC PROJECTS\3709 Brookfield Properties\99-004 Suffern NY\Dwg\Site Plans\03709990045D5.dwg, ---> 121 HYDRO INTERNATIONAL DETAILS

COPYRIGHT © 2024 – DYNAMIC ENGINEERING CONSULTANTS, PC – ALL RIGHTS RESERVED