


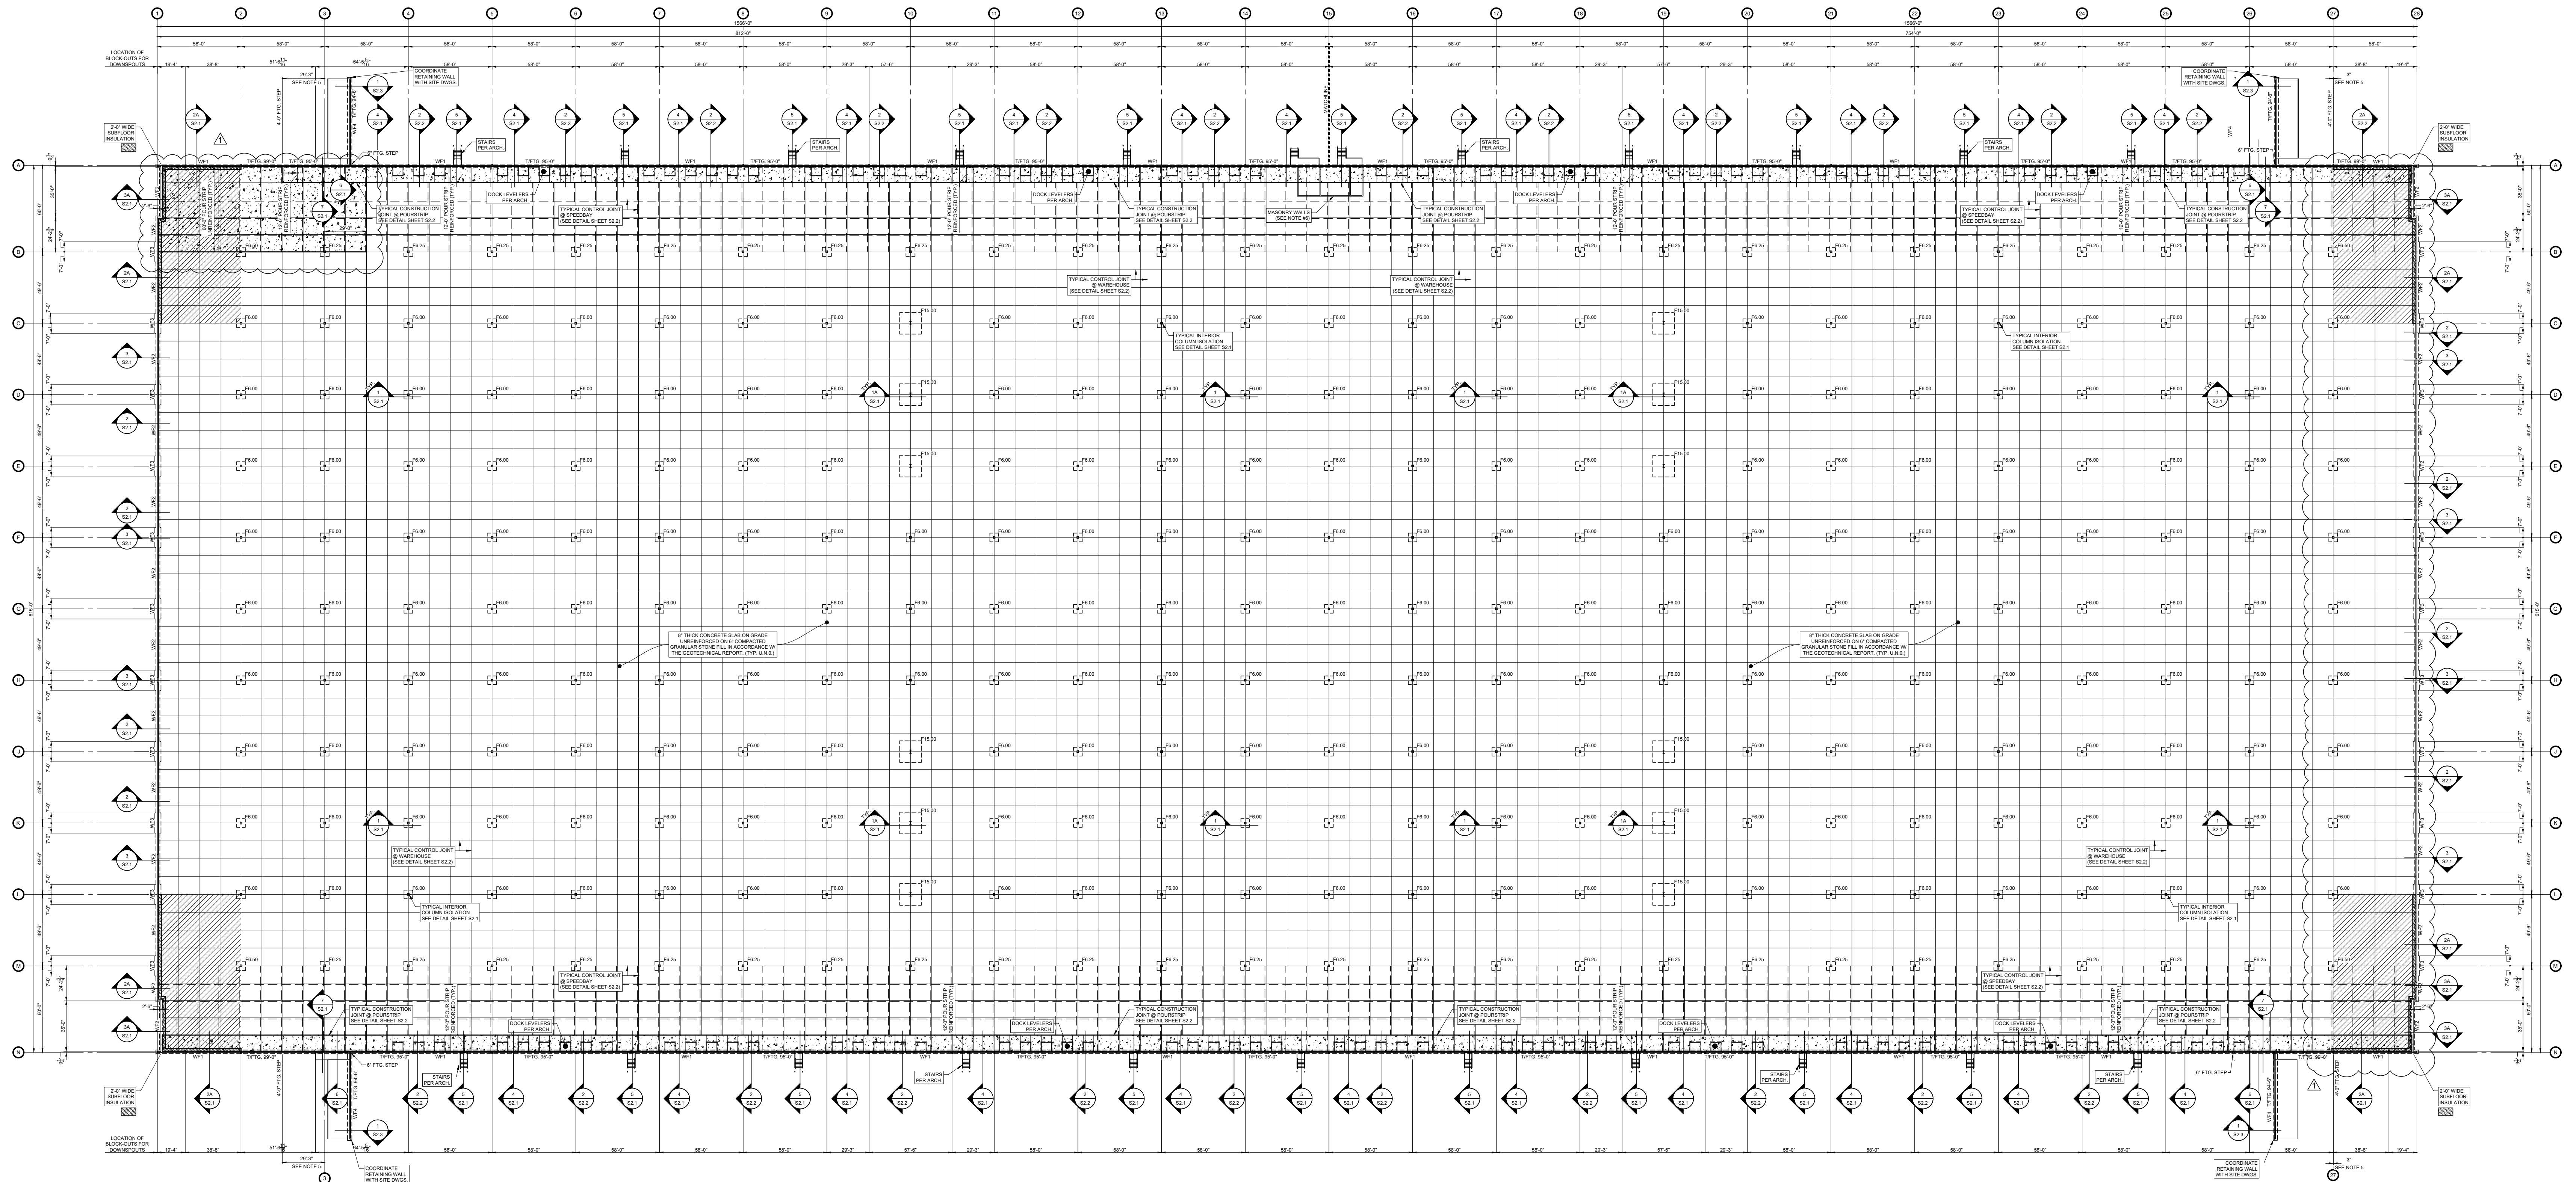

COLUMN FOOTING SCHEDULE		
MARK	FOOTING SIZE	FOOTING REINFORCEMENT
	W x L x D	
F6.00	6'-0"x6'-0"x1'-2"	6 - #6 E.W. BOT.
F6.25	6'-3"x6'-3"x1'-2"	6 - #6 E.W. BOT.
F6.50	6'-6"x6'-6"x1'-3"	7 - #6 E.W. BOT.
F15.00	15'-0"x15'-0"x3'-6"	18 - #8 E.W. TOP & BOT.


WALL FOOTING SCHEDULE		
MARK	FOOTING SIZE W x D	FOOTING REINFORCEMENT
WF1	2'-6" x 3'-0"	5 - #4 CONT. TOP & BOT. W/ #3 TIES @ 48" O.C.
WF2	2'-9" x 3'-0"	6 - #4 CONT. TOP & BOT. W/ #4 TIES @ 48" O.C.
WF3	4'-3" x 3'-0"	9 - #4 CONT. TOP & BOT. W/ #4 TIES @ 24" O.C.
WF4		SEE DETAIL 1-S2.3

OVERALL FOUNDATION PLAN

SCALE: NONE

- NOTES:
1. FINISH FLOOR REFERENCE ELEVATION = 100'-0" (FIN ±315.50' VERIFY WITH CIVIL DWGS.)
 2. TOP OF INTERIOR COLUMN FOOTING ELEVATION = 98'-10" U.O.N.
 3. TOP OF INTERIOR COLUMN FOOTING ELEVATION = 98'-0" U.O.N.
 4. COORDINATE ALL DOOR OPENINGS AND LOCATIONS WITH ARCHITECTURAL DRAWINGS.
 5. VERIFY LOCATION OF ALL FOOTING STEPS WITH PANEL DRAWINGS
 6. PRIOR TO CASTING FLOOR SLAB, VERIFY:
 - a. PROVIDE 6" CMU WALLS REINFORCE WITH #4 @ 24" O.C. SEE DETAIL SHEET S2.3.
 7.  INDICATES 10 MIL VAPOR BARRIER UNDER SLAB ON GRADE
 8.  REINFORCE WITH W.W.F. 6#x12W2
 9.  INDICATES TO PROVIDE LOAD PLATE BASKETS IN SPEED BAYS ONLY
 10.  INDICATES POUR STRIP. COORDINATE DIMENSIONS AND REINFORCEMENT WITH PLAN.

OVERALL PLAN FOR
REFERENCE ONLY.
USE SHEETS S1.1 TO S1.2
FOR WORKING DWGS

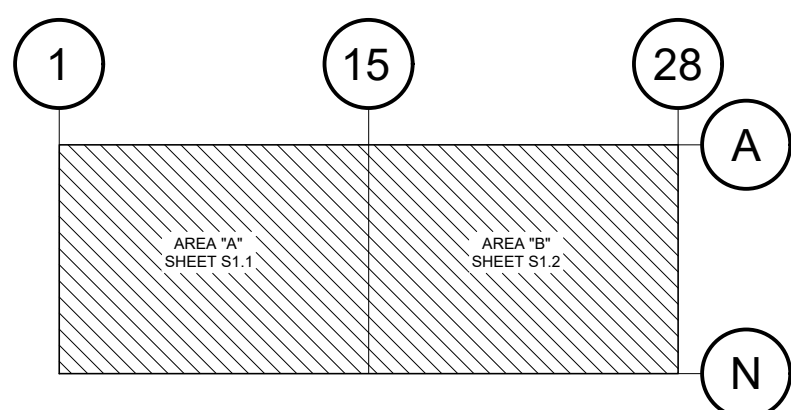

KEY PLAN