



NO.	DATE	DESCRIPTION
12-04-23	COORDINATION SET	
12-08-23	75% PROGRESS SET	
01-26-24	90% PROGRESS SET	
02-09-24	PERMIT SET	

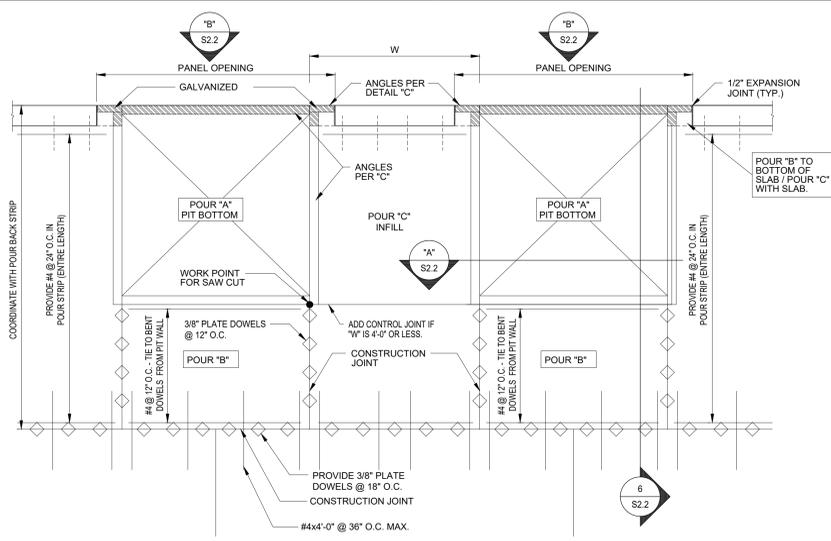

1 DOCK LEVELER PIT PLAN DETAIL
 SCALE: NO SCALE

NOTES:
 1. BARS PARALLEL TO WALL PANELS IN POUR "C" ARE NOT REQUIRED IF PANELS ARE CONNECTED TO FOUNDATIONS WITH A CONNECTION MEETING THE REQUIREMENTS OF ACI 318.


DETAIL BOOK REF. S1.32 8/24/2023

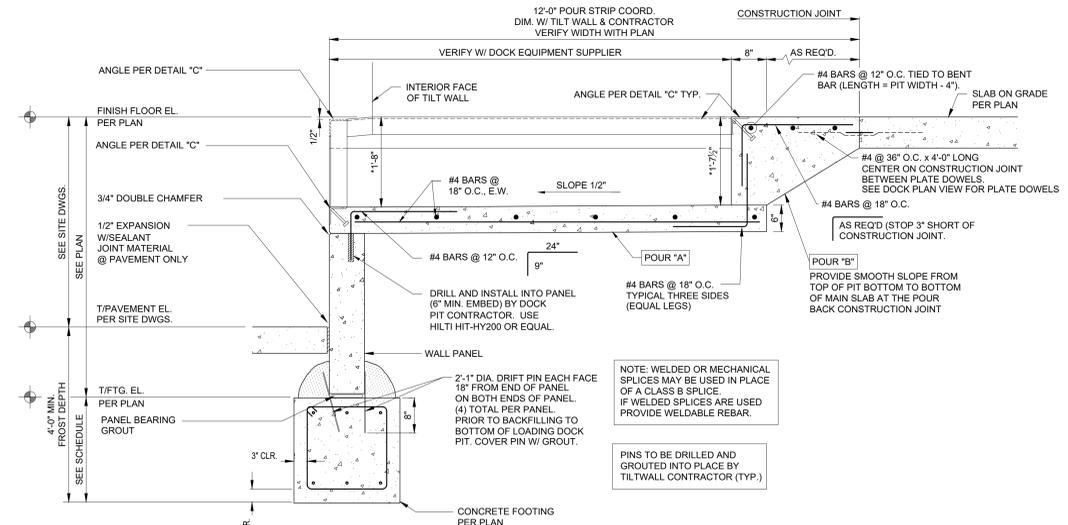


2 SECTION AT DOCK PIT
 SCALE: NO SCALE

NOTES:
 1. PLACE GROUT UNDER PANEL WITHIN 36 HOURS OF ERECTION.
 2. COORD. INSULATION REQUIREMENTS (IF REQUIRED) W/ARCH.
 3. VERIFY DIMENSIONS WITH SPECIFIED DOCK EQUIPMENT.
 4. UTILIZE STAINLESS STEEL WIRE TIES IN ALL DOCK PITS.


DETAIL BOOK REF. S1.33-N 8/24/2023

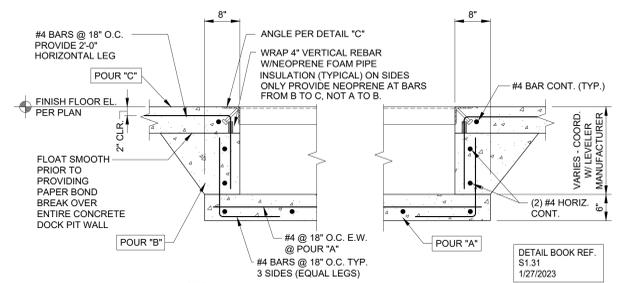

A DOCK LEVELER PIT
 SCALE: NO SCALE

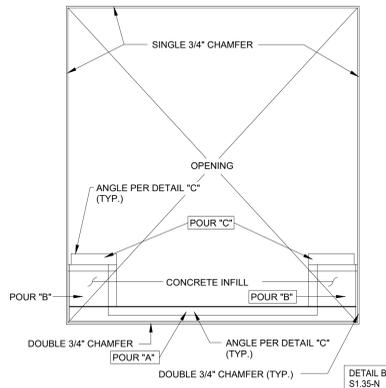

B DOCK PIT ELEVATION
 SCALE: NO SCALE

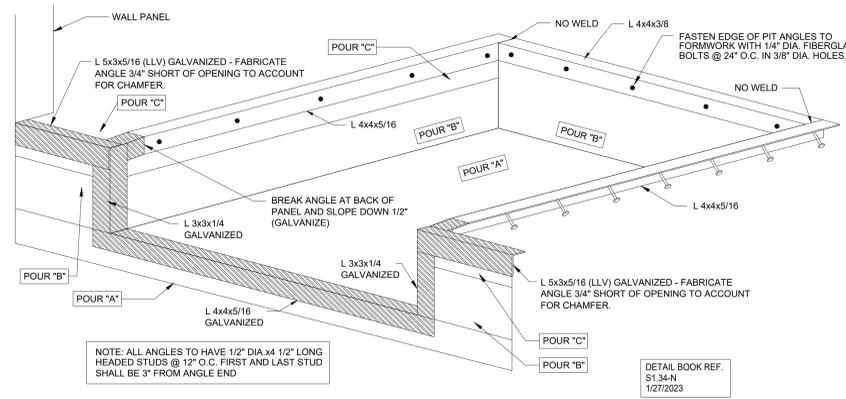

C ISOMETRIC AT DOCK LEVELER
 SCALE: NO SCALE

SLAB DEPTH, IN.	PLATE DIMENSION, IN.	DOWEL SPACING CENTER TO CENTER, IN.
5 TO 6	14 x 4 1/2 x 4 1/2	18
7 TO 8	3/8 x 4 1/2 x 4 1/2	18
9 TO 11	3/4 x 4 1/2 x 4 1/2	20





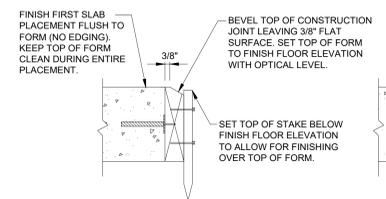


PLATE DOWEL CONSTRUCTION JOINT INSTALLATION
 SCALE: NONE

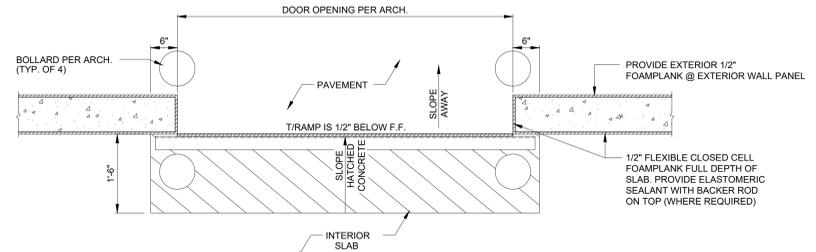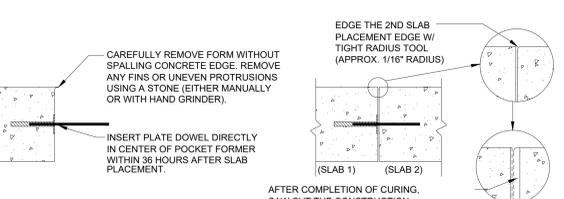

DRIVE-IN-DOOR PLAN VIEW
 SCALE: NONE

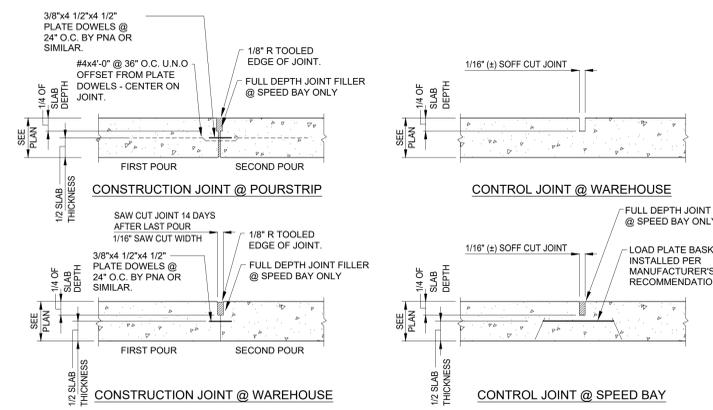

SLAB ON GRADE JOINTS
 SCALE: NO SCALE

DETAIL BOOK REF. S1.01-N 8/24/2023