


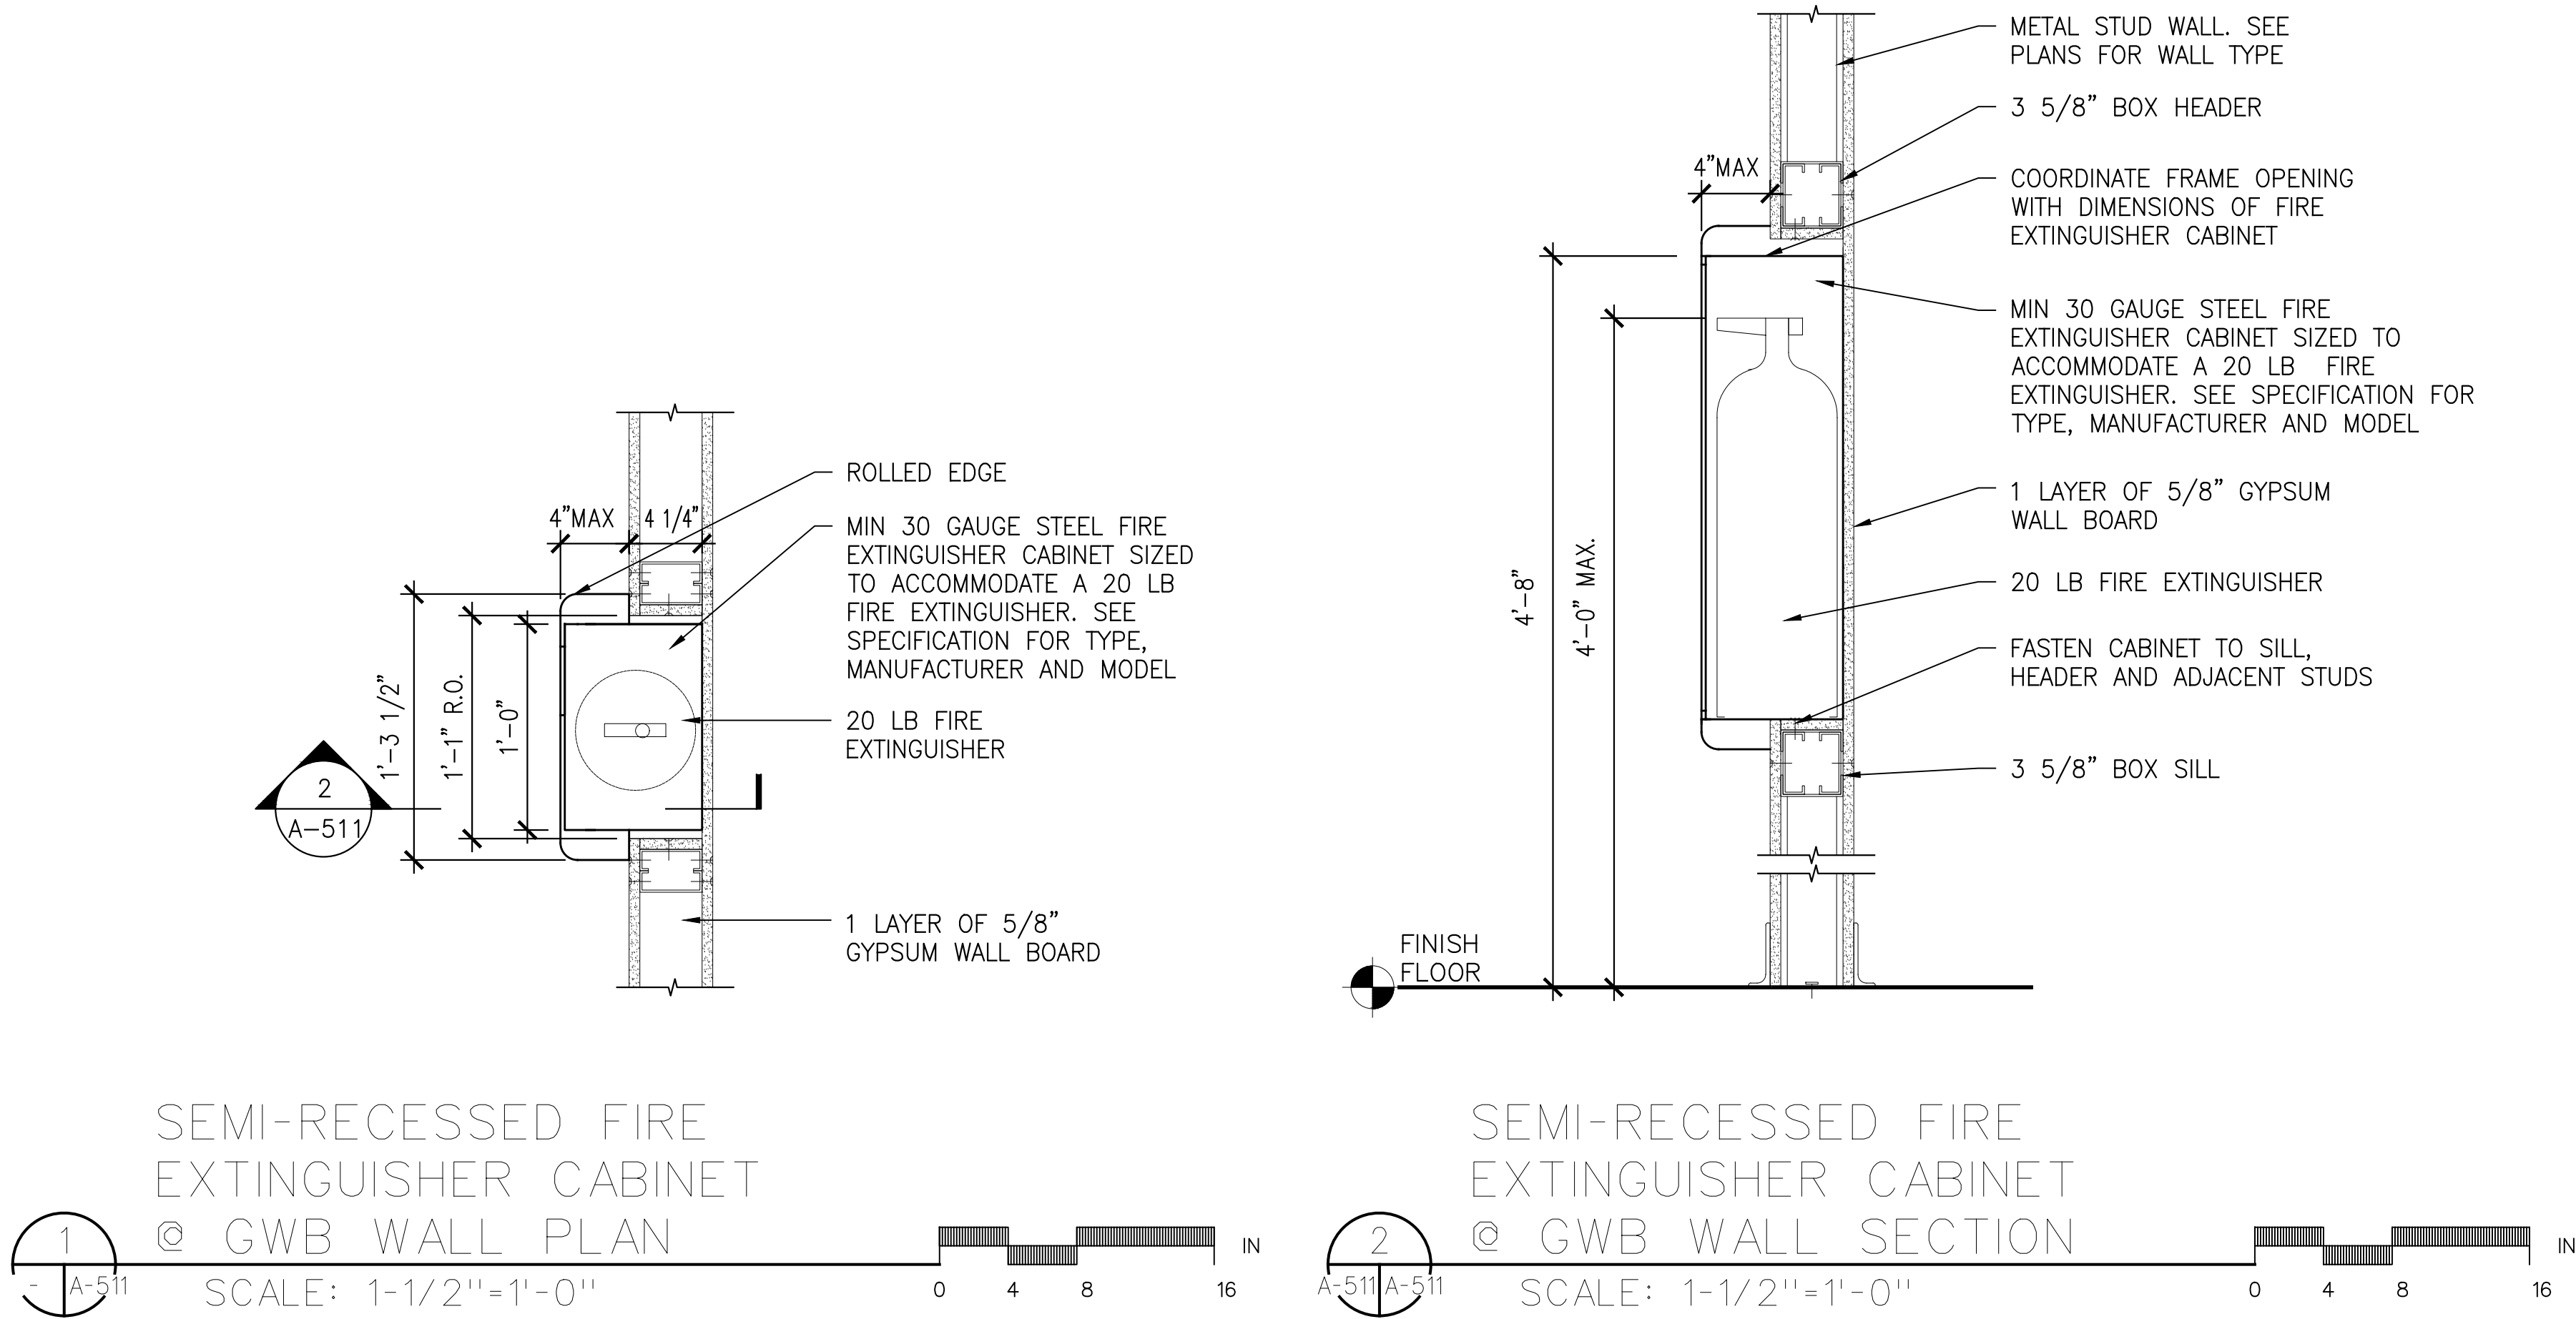

- NOTES:
- FOR THE SCOPE AND LOCATION OF FIRE EXTINGUISHERS, REFER TO MEP DRAWINGS.
 - FOR EXTINGUISHERS INSTALLED IN COLUMNS, DO NOT DRILL INTO STRUCTURAL STEEL. BRACKETS AND CLAMPS SHALL BE DESIGNED, FURNISHED, AND INSTALLED AS REQUIRED TO MOUNT THE EXTINGUISHERS. THE CONTRACTOR SHALL SUBMIT THE BRACKETS, CLAMPS, SUPPORTING HOOKS AND RELATED ITEMS FOR APPROVAL.
 - PROVIDE A FIRE EXTINGUISHER SIGNAGE ABOVE ALL FIRE EXTINGUISHERS PLACED THROUGHOUT WITH OR WITHOUT CABINETS. REFER TO MEP DRAWINGS.
 - FIRE EXTINGUISHER SIGNAGE SHALL BE COMMERCIALY AVAILABLE, BRADY SP818V "V" SIGN TWO-SIDED, ACRYLIC, 8-1/2"W X 18"H OR APPROVED EQUAL.
 - THE CABINET SHALL BE A FIRE RATED CABINET, CERTIFIED FOR ONE OR TWO HOUR COMBUSTIBLE WALL SYSTEM TO MEET THE REQUIREMENTS OF UL 1479.
 - REFER TO FIXTURE AND ACCESSORY SCHEDULE ON DWG A-509 FOR ADDITIONAL INFORMATION.

ARCHITECT
di Domenico + Partners LLP
Architecture
Landscape Architecture
Planning
3743 Crescent Street, 3rd Floor
Long Island City, New York 11101
Tel 212-337-0400
Fax 212-337-3567


CIVIL PLANNING ENGINEER
JMC
JMC Planning Engineering Landscape
Architecture & Land Surveying, PLLC
120 Bedford Road
Armonk, New York 10504
Tel 914-273-5225
Fax 914-273-2102

MEP ENGINEER
Burns BURNS ENGINEERING, PC.
1261 Broadway, Suite 708
New York, New York 10001
Tel 212-687-3503

STRUCTURAL ENGINEER
GEI GEI50
1365 Broadway, 20th FL
New York, New York 10018
Tel 212-687-8282



MANHATTAN BEER DISTRIBUTORS
20 DUNNIGAN DRIVE
SUFFERN, NEW YORK

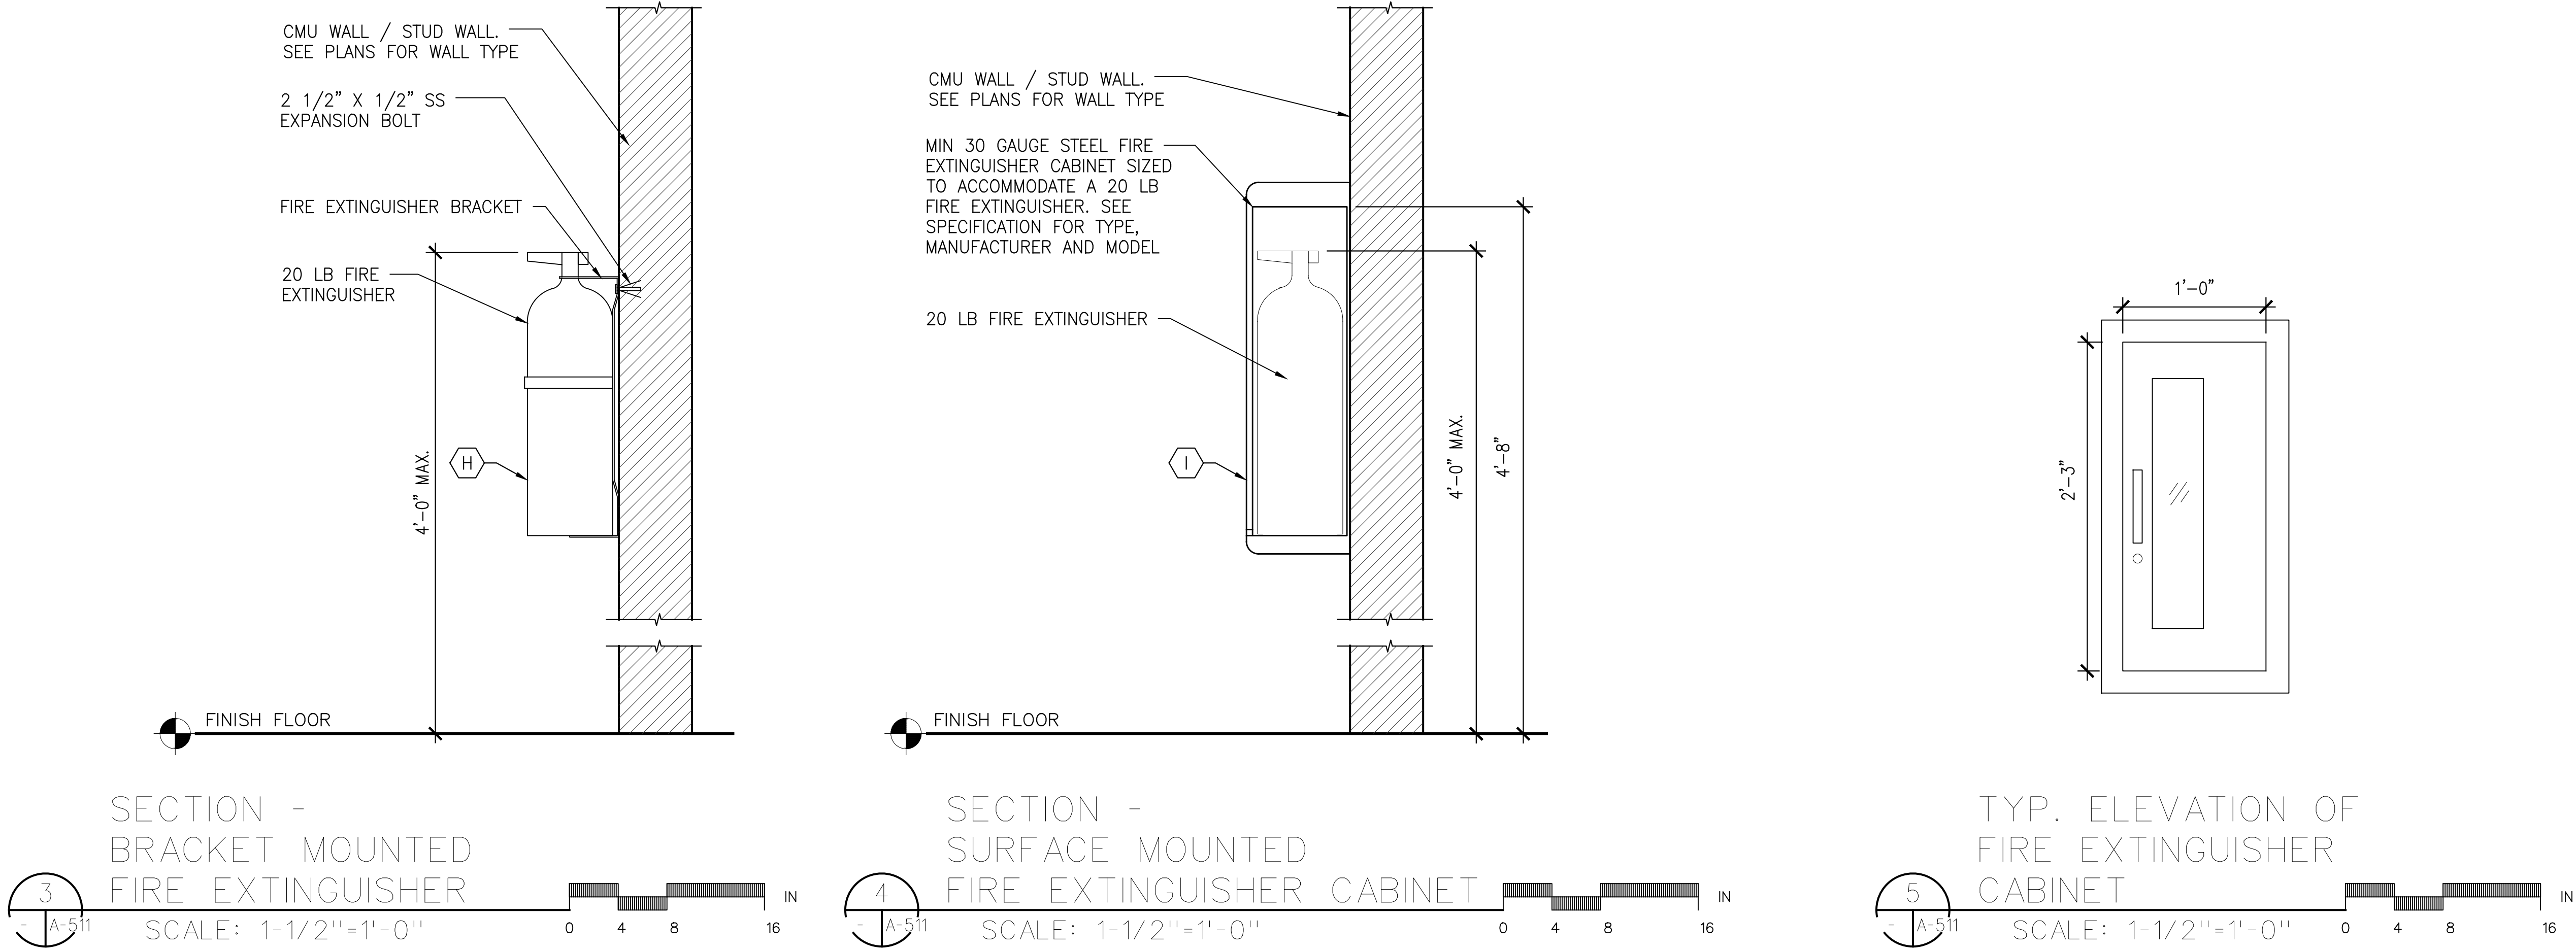

REV	DESCRIPTION	DATE
-	ISSUED FOR DOB SUBMISSION	9.10.21
-	ISSUED FOR BID	10.15.21
-	ISSUED FOR CONSTRUCTION	11.30.21
-	REVISED BID SET	01.20.22
-	REVISED FOR CONSTRUCTION	04.05.22
-	PER METAL PANEL REDESIGN	07.26.22
-	REVISED FOR CONSTRUCTION	08.15.22

DRAWN BY :	S. WOO
CHECKED BY :	D. TOBAR, R.A.
APPROVED BY :	A. BERGER, R.A.
DATE :	07.30.2021
SCALE :	AS NOTED

DRAWING TITLE :

**TYPICAL FIRE
EXTINGUISHER DETAILS**

DWG NUMBER :

A-511